

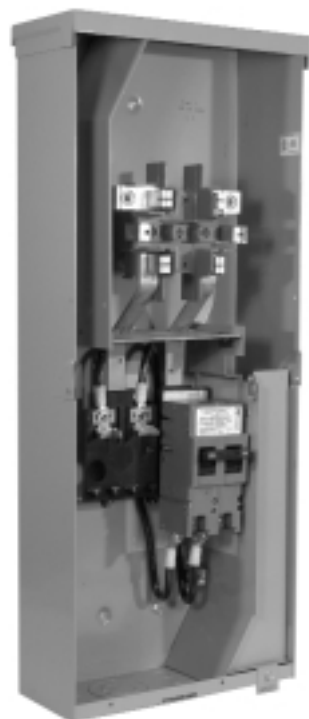
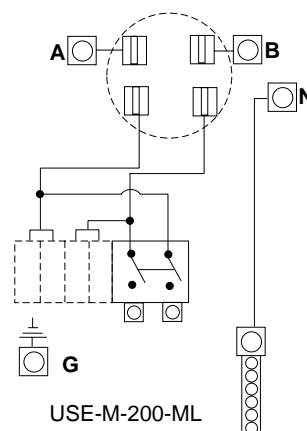



120/240 VAC

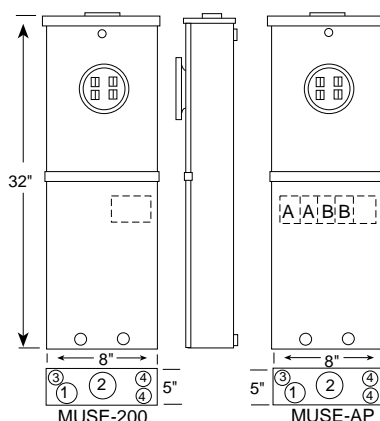

USE-M-200-MB

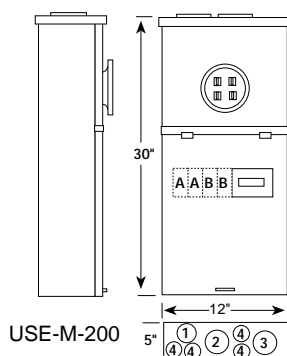

USE-M-200-ML

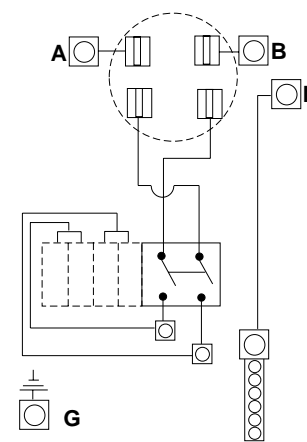

USE-M-200-MB

200 AMP—4 TERMINAL*—METERED—RING TYPE—1Ø3W—10,000 AIC RATING

NO. OF TERM.	SERVICE	CATALOG NUMBER	HUB	CONNECTORS	DIMENSIONS			CONCENTRIC K.O.'S			
				LINE	D"	W"	H"	1	2	3	4
4	OH	MUSE-AP-200-MB	H.O.	#4-250 MCM	5	8	32	1 1/4	2 1/2	1 1/2, 3/4	1 1/2, 3/4
4	OH	MUSE-AP-200-ML	H.O.	#4-250 MCM	5	8	32	1 1/4	2 1/2	1 1/2, 3/4	1 1/2, 3/4
4	OH	MUSE-20	H.O.	#4-250 MCM	5	8	32	1 1/4	2 1/2	1 1/2, 3/4	1 1/2, 3/4
4	OH/UG	USE-M-200-MB	(2) C.P.	#4-250 MCM	5	12	30	1 1/4	2 1/2	1 1/2, 3/4	1 1/2, 3/4
4	OH/UG	USE-M-200-ML	(2) C.P.	#4-250 MCM	5	12	30	1 1/4	2 1/2	1 1/2, 3/4	1 1/2, 3/4

- ***FIFTH TERMINAL:** For field installed 5th terminal order catalog number — "105J".
- **HUBS:** Overhead enclosures accept up to 2 1/2" hubs. Order hub separately.
- **SEALING RINGS:** Units supplied with **MR-2**, snap style, sealing rings.
- **NEUTRAL BUSS & GROUND BAR:** Factory installed.
- **MUSE-AP-200-MB:** 200 Amp metered main with provision for 200 Amp direct wire feeder. 200 Amp breaker, UQFP-M-200, wired in series with four circuit load center. Additional 4 branch circuits available for (1) two-pole and (2) one-pole, or (4) one pole breakers.
- **MUSE-AP-200-ML:** 200 Amp metered main with 200 Amp breaker, UQFP-200, wired in parallel. Additional 4 branch circuits available for (1) two-pole and (2) one-pole, or (4) one pole breakers.
- **MUSE-20:** Circuit breaker, UQFB-200, installed. No branch circuit breaker space available.
- **USE-M-200-MB:** 200 Amp meter main with 200 Amp direct wire feeder. 200 Amp breaker, UQFP-M-200, wired in series. Additional 4 branch circuits available for (1) two-pole and (2) one-pole, or (4) one pole breakers. *Not approved for underground service by E.U.S.E.R.C. utilities.*
- **USE-M-200-ML:** 200 Amp meter main with 200 Amp breaker, UQFP-200, wired in parallel. Additional 4 branch circuits available for (1) two-pole and (2) one-pole, or (4) one pole breakers.
- **22,000 AIC:** For 22,000 AIC, consult factory.