

## IMPORTANT SAFETY INSTRUCTIONS

- Be sure the electricity to the system you are working on is turned off; either the fuse removed or the circuit breaker set at off.
- Use of other manufacturers components will void warranty, listing and create a potential safety hazard.
- You don't need special tools to install this fixture.
- Be sure to follow the steps in the order given.
- Read instructions carefully.
- If you are unclear as to how to proceed, contact a qualified electrician.
- To reduce the risk of fire, electric shock or personal injury, mount to outlet box or supporting system able to support the weight of the fixture.
- Save these instructions.

## CLEANING

To clean, wipe fixture with a soft cloth. Clean glass with a mild soap. Do not use abrasive materials such as scouring pads or powders, steel wool or abrasive paper.

## ORDERING PARTS

Keep this sheet for future reference, and in case you need to order replacement parts. Parts for this fixture can be ordered from place of purchase. Be sure to use exact wording from illustration when ordering parts.

## BEFORE YOU BEGIN

Carefully remove the fixture from the carton and check that all parts are included, as shown in Figure 1. Be careful not to misplace any of the screws or parts which are needed to install this fixture.

## STEP 1:

Rotate arms (if applicable). Align the holes in the scroll and the front. Secure them with the studs/ball nuts. Thread fixture loop (I) to top of fixture.

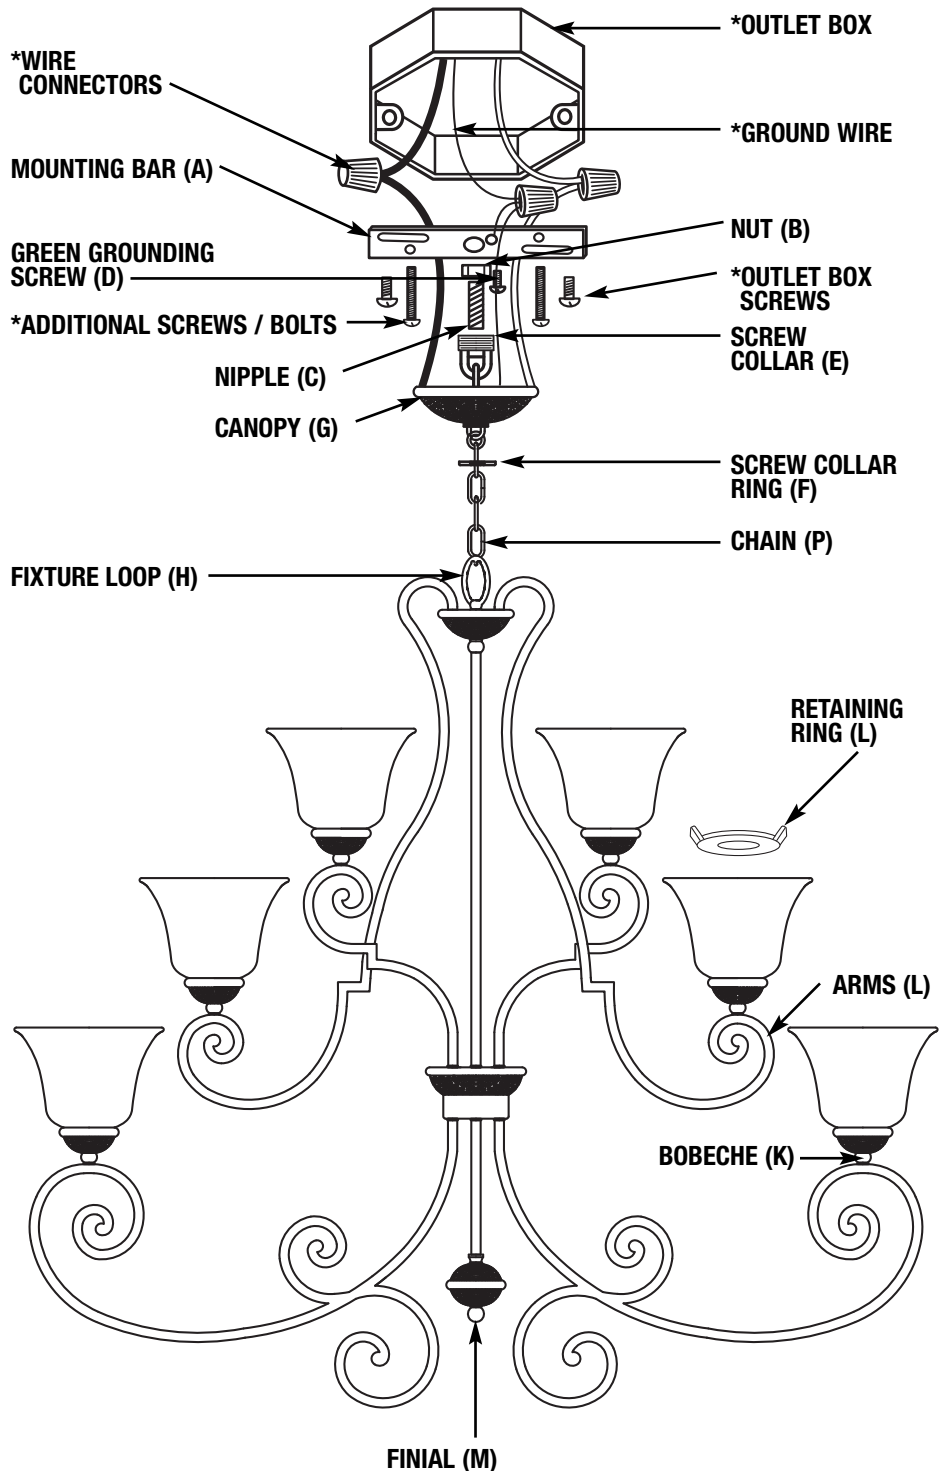


FIGURE 1

\*NOT SUPPLIED

**STEP 1:**

Secure mounting bar (A) to outlet box with outlet box screws (not supplied). Thread nut (B) on nipple (C) so that 3 threads are exposed above nut (B). Thread nipple (C) into mounting bar (A) and secure with nut (B). Attach screw collar (E) to nipple (C).

**STEP 2:**

To hang fixtures weighing over 50 lbs. (over 25 lbs. in Canada) the mounting bar must be supported independently of the ceiling junction box. Recommend minimum of two 1/4" diameter screws or bolts (rated for 200 lbs. or greater) which must have sufficient length to be installed through the mounting bar, junction box, and securely into the ceiling structure member or cross brace. This installation must be able to support at least four times the weight of the fixture. Check this fact before starting assembly. If unsure please consult a qualified technician.

**STEP 3:**

Using 2 pairs of pliers, open one link of chain (P) and connect it to the fixture loop (H) at the top of the fixture.

**STEP 4:**

Slide the screw collar ring (F) and canopy (G), in that order, over chain (P). Open one link on the other end of the chain (P) and attach it to the screw collar (E) which has been mounted to the ceiling nipple (C). **BE SURE TO CLOSE ALL CHAIN LINKS COMPLETELY.**

**STEP 5:**

- A.** Use a listed wire connector to connect the fixture hot wire (black wire, or round and smooth tracer) to the supply hot wire.
- B.** Use a listed wire connector to connect the fixture common wire (white wire, or square and rigid) to the supply common wire.
- C.** Gently try to remove the wires from the connector. If you can remove the wires, carefully re-do the wiring connection.

**STEP 6:**

**GROUNDING INSTRUCTIONS:**

Connect the supply ground wire, fixture ground wire, and mounting bar ground wire (pre attached) using the supplied wiring connector. Gently try to remove the wires from the connector. If you can remove the wires, carefully re-do the wiring connection.

Make sure no bare wires can be seen outside wire connectors.

**STEP 1:**

After wires are connected, tuck them carefully inside outlet box. Raise canopy (H) against ceiling and thread the screw collar ring (G) to the screw collar (E).

**STEP 2:**

Attach bobèche (K) to arms (L) using supplied screws.

**STEP 3:**

Slide glass (J) over socket and secure in place by threading retaining ring (L) onto socket.

**STEP 4:**

Install lamps by twisting into socket.

**STEP 5:**

Thread finial (M) to bottom of fixture.

**ONE PIECE  
LAMP /  
BALLAST  
COMBINATION**



**ONE PIECE LAMP/  
BALLAST  
COMBINATION**

**FIGURE 3**



MARK MEANS LAMP CONTAINS MERCURY.  
FOLLOW DISPOSAL LAWS.  
SEE [WWW.LAMPRECYCLE.ORG](http://WWW.LAMPRECYCLE.ORG)