

Pull Cord Switches

CFA Series

The Edwards 6537 pull cord switch provides emergency call activation. The call may be reset at the initiating switch. Cords are replaceable with a standard nylon cord.

Designed for either flush or surface mounting. Unit fits in a standard single-gang electrical box and plaster cover. For surface mounting, use a Wire-mold surface box. All boxes must have a minimum depth of 1 3/4" (44mm). Boxes and covers not supplied.


Features and Specifications

- Double pole single throw switch
- Stainless steel faceplate
- 10 foot cord length
- Replacement cords user supplied



Ordering Information			
Description	Cat. No.	Operating Voltage	Current
Pull Cord Switch	6537	125V AC	3 A
		125V DC	0.5 A

Weights and Dimensions		
Cat. No.	Approx. Net Weight (lb.)	Approx. Shipping Weight (lb.)
6537	0.18	0.29

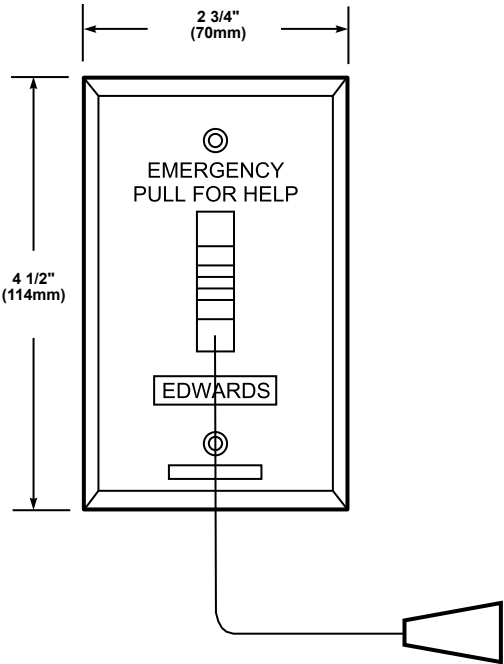

Pull Cord Switches

CFA Series

The Edwards 6537 pull cord switch provides emergency call activation. The call may be reset at the initiating switch. Cords are replaceable with a standard nylon cord.

Designed for either flush or surface mounting. Unit fits in a standard single-gang electrical box and plaster cover. For surface mounting, use a Wire-mold surface box. All boxes must have a minimum depth of 1 3/4" (44mm). Boxes and covers not supplied.

Features and Specifications

- Double pole single throw switch
- Stainless steel faceplate
- 10 foot cord length
- Replacement cords user supplied



Ordering Information			
Description	Cat. No.	Operating Voltage	Current
Pull Cord Switch	6537	125V AC	3 A
		125V DC	0.5 A

Weights and Dimensions		
Cat. No.	Approx. Net Weight (lb.)	Approx. Shipping Weight (lb.)
6537	0.18	0.29

