


## *The connecting link between your generator and transfer switch system.*



These heavy-duty, all rubber power cords provide the connection between your generator and transfer switch or power inlet box. The 4-wire locking plug and connector match up with the inlet on each transfer switch and power inlet box. Most portable generators are supplied with a 20 Amp, 30 Amp or 50 Amp 4-wire locking receptacle that accepts the locking plug on the end of the power cord. The female connector plugs into the transfer switch or power inlet box. Made with UL Listed components.

### Standard Configurations:

Model Number	Length, Amps	Plugs and Connectors	Use with Transfer Switch
RJB10305	5 ft, 30 Amp/125V	L5-30 Female Only	30114
RJB10310	10 ft, 30 Amp/125V	L5-30 Male, L5-30 Female	30114
RJB10325	25 ft, 30 Amp, 125V	L5-30 Male, L5-30 Female	30114
RJB10350	50 ft, 30 Amp, 125V	L5-30 Male, L5-30 Female	30114
RJB12405	5 ft, 20 Amp, 125/250V	L14-20 Female Only	20216, <b>200660</b>
RJB12410	10 ft, 20 Amp, 125/250V	L14-20 Male, L14-20 Female	20216, <b>200660</b>
RJB12425	25 ft, 20 Amp, 125/250V	L14-20 Male, L14-20 Female	20216, <b>200660</b>
RJB12450	50 ft, 20 Amp, 125/250V	L14-20 Male, L14-20 Female	20216, <b>200660</b>
RJB10405	5 ft, 30 Amp, 125/250V	L14-30 Female Only	30216, 302110, 30508, <b>301060</b>
RJB10410	10 ft, 30 Amp, 125/250V	L14-30 Male, L14-30 Female	30216, 302110, 30508, <b>301060</b>
RJB10425	25 ft, 30 Amp, 125/250V	L14-30 Male, L14-30 Female	30216, 302110, 30508, <b>301060</b>
RJB10450	50 ft, 30 Amp, 125/250V	L14-30 Male, L14-30 Female	30216, 302110, 30508, <b>301060</b>
RJB06405	5 ft, 50 Amp, 125/250V	CS6364 Female Only	TRC1005A, <b>501210</b>
RJB06410	10 ft, 50 Amp, 125/250V	CS6365 Male, CS6364 Female	TRC1005A, <b>501210</b>
RJB06425	25 ft, 50 Amp, 125/250V	CS6365 Male, CS6364 Female	TRC1005A, <b>501210</b>
RJB06450	50 ft, 50 Amp, 125/250V	CS6365 Male, CS6364 Female	TRC1005A, <b>501210</b>

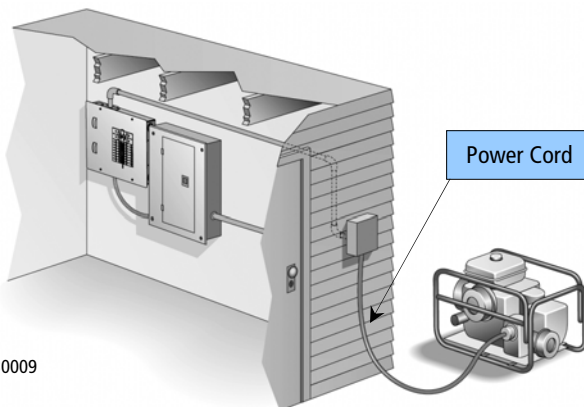

**Contractor Convenience Cord Model M10325**

Designed for generators up to 7500 watts, this heavy duty, all rubber cord provides a convenient way to use tools or appliances on a jobsite or while camping. Instead of juggling with multiple extension cords, connect this 25 foot cord to the L5-30 receptacle on your generator. Then connect your tools or appliances to the weatherproof box. For 120 volt use only.


## *The connecting link between your generator and transfer switch system.*



These heavy-duty, all rubber power cords provide the connection between your generator and transfer switch or power inlet box. The 4-wire locking plug and connector match up with the inlet on each transfer switch and power inlet box. Most portable generators are supplied with a 20 Amp, 30 Amp or 50 Amp 4-wire locking receptacle that accepts the locking plug on the end of the power cord. The female connector plugs into the transfer switch or power inlet box. Made with UL Listed components.

### Standard Configurations:

Model Number	Length, Amps	Plugs and Connectors	Use with Transfer Switch
RJB10305	5 ft, 30 Amp/125V	L5-30 Female Only	30114
RJB10310	10 ft, 30 Amp/125V	L5-30 Male, L5-30 Female	30114
RJB10325	25 ft, 30 Amp, 125V	L5-30 Male, L5-30 Female	30114
RJB10350	50 ft, 30 Amp, 125V	L5-30 Male, L5-30 Female	30114
RJB12405	5 ft, 20 Amp, 125/250V	L14-20 Female Only	20216, <b>200660</b>
RJB12410	10 ft, 20 Amp, 125/250V	L14-20 Male, L14-20 Female	20216, <b>200660</b>
RJB12425	25 ft, 20 Amp, 125/250V	L14-20 Male, L14-20 Female	20216, <b>200660</b>
RJB12450	50 ft, 20 Amp, 125/250V	L14-20 Male, L14-20 Female	20216, <b>200660</b>
RJB10405	5 ft, 30 Amp, 125/250V	L14-30 Female Only	30216, 302110, 30508, <b>301060</b>
RJB10410	10 ft, 30 Amp, 125/250V	L14-30 Male, L14-30 Female	30216, 302110, 30508, <b>301060</b>
RJB10425	25 ft, 30 Amp, 125/250V	L14-30 Male, L14-30 Female	30216, 302110, 30508, <b>301060</b>
RJB10450	50 ft, 30 Amp, 125/250V	L14-30 Male, L14-30 Female	30216, 302110, 30508, <b>301060</b>
RJB06405	5 ft, 50 Amp, 125/250V	CS6364 Female Only	TRC1005A, <b>501210</b>
RJB06410	10 ft, 50 Amp, 125/250V	CS6365 Male, CS6364 Female	TRC1005A, <b>501210</b>
RJB06425	25 ft, 50 Amp, 125/250V	CS6365 Male, CS6364 Female	TRC1005A, <b>501210</b>
RJB06450	50 ft, 50 Amp, 125/250V	CS6365 Male, CS6364 Female	TRC1005A, <b>501210</b>

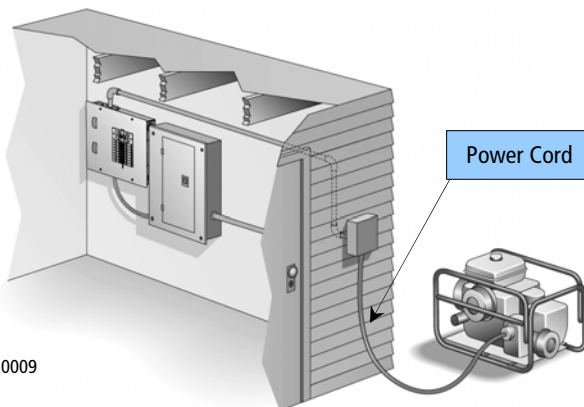

**Contractor Convenience Cord Model M10325**

Designed for generators up to 7500 watts, this heavy duty, all rubber cord provides a convenient way to use tools or appliances on a jobsite or while camping. Instead of juggling with multiple extension cords, connect this 25 foot cord to the L5-30 receptacle on your generator. Then connect your tools or appliances to the weatherproof box. For 120 volt use only.