

DIVA Controls

The designer dimmer that matches your paddle switches.



Preset Dimmer




Preset Fan-Speed Controls

PRODUCT FAMILY FEATURES


- Large paddle switch with a captive linear-slide dimmer for a standard designer wallplate opening
- Full family of products for most lighting sources
- Dimmers frature built-in soft-glow nightlight
- Uses standard single-pole and 3-way wiring for easy installation in any home
- For mor Diva choices, see the new Diva Satin Colors product line

DIMENSIONS

Front




Profile




*some models up to 1.44 in (37 mm)

CONTROLS AND ACCESSORIES


Preset Dimmers




Fan-Speed Controls



Switches



Receptacles




15 A
Receptacle




15 A
GFCI Receptacle

Telephone/Cable TV Jacks




Single
Telephone Jack




Cable TV
Jack

Ports



6-Port
Frame

Standard Multigang Wallplates

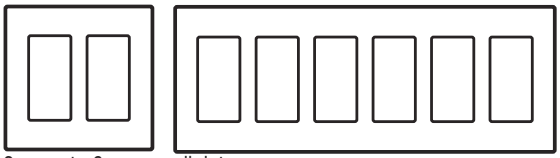

2-gang to 6-gang wallplates

SPECIFICATION SERIES STANDARD FEATURES

- Square Law Dimming
- Power-failure memory
- Electrostatic discharge tested
- RFI suppression
- Captive linear slider
- Precise color matching
- Mechanical air-gap switch to disconnect load power

Lutron controls are rated at 120 V~, 60 Hz unless otherwise noted.

JOB NAME	AREA CONTROLLED
LOCATION	JOB NUMBER
TITLE	PAGE NO.

DIMMERS

Description	Maximum Capacity [1,6]	Model #
Incandescent		
Preset Dimmers with Nightlight		
Single-pole	600 W	DV-600P-
Single-pole	1000 W	DV-10P-
3-way	600 W	DV-603P-
3-way	1000 W	DV-103P-

Note: The nightlight is visible best on the lighter colors. For 3-way and 4-way switching, use with Claro switches or other mechanical switches.

Electronic Low-Voltage		
Preset Dimmers with Nightlight		
Single-pole	300 W	DVELV-300P-
3-way	300 W	DVELV-303P-

Note: Requires neutral wire connection. The nightlight is visible best on the lighter colors. For 3-way and 4-way switching, use with Claro switches or other mechanical switches.

Magnetic Low-Voltage		
Preset Dimmers with Nightlight		
Single-pole	600 VA (450 W)[2]	DVLV-600P-
Single-pole	1000 VA (800 W)[2]	DVLV-10P-
3-way	600 VA (450 W)[2]	DVLV-603P-
3-way	1000 VA (800 W)[2]	DVLV-103P-

Note: The nightlight is visible best on the lighter colors. For 3-way and 4-way switching, use with Claro switches or other mechanical switches.

Fluorescent Dimming with Hi-lume and Eco-10 (ECO-Series) Electronic Ballasts		
Preset Dimmers with Nightlight [4]		
Single-pole/ 3-way	8 A	DVF-103P-
Single-pole/ 3-way, 277 V~	6 A	DVF-103P-277-

Note: Use with Lutron Hi-lume or Eco-10 (ECO-Series) line voltage control Electronic Dimming Ballasts only. Requires neutral wire connection. The nightlight is visible best on the lighter colors. For 3-way and 4-way switching, use with Claro switches or other mechanical switches.

Fluorescent Dimming with Tu-Wire Electronic Ballasts		
Preset Dimmers with Nightlight		
Single-pole/ 3-way	5 A	DVFTU-5A3P-

Note: Use with Lutron Tu-Wire line voltage control electronic dimming ballasts only. The nightlight is visible best on the lighter colors. For 3-way and 4-way switching, use with Claro switches or other mechanical switches.

HI-POWER 2•4•6 DIMMING MODULES

To increase load capacity up to 30,000 W/VA in most popular sources, use one DV-600P- or DV-603P- and add up to five dimming modules. Cannot be used with 0–10 V ⎓ ballast.

FAN-SPEED CONTROLS

Quiet Controls		

For use with one ceiling paddle fan.

Preset Fan-Speed Controls [3,4]		
Single-pole/3-way, 3-speed	1.5 A	DVFSQ-F-
Light Switch/ Fan-Speed Control [4]		
Fan 3-speed with off	1.5 A	DVFSQ-LF-
Single-pole switch:		
Inc./Hal.	2 A	
CFL/LED	1 A	

Note: Does not have soft-glow nightlight.

SWITCHES [4]

General Purpose Switching of all Sources and Motor Loads		
Single-pole, 120/277 V	15 A	CA-1PS-
3-way, 120/277 V	15 A	CA-3PS-
4-way, 120/277 V	15 A	CA-4PS-

ACCESSORIES

Receptacles		
Receptacle [4]		
125 V	15 A	CAR-15-
GFCI Receptacle [4]		
125 V	15 A	CAR-15-GFCI-

Telephone and Cable Television Jacks

A physical barrier (partition) must exist when ganging with line-voltage products

Single Telephone Jack [5]		
6-conductor, RJ11		CA-PJ-

Note: Also accepts most 4-conductor plugs.

Cable TV Jack [4,5]		
F-STYLE		
75 Ω, coaxial cable jack		CA-CJ-

1 For capacities in multigang installations see **Derating/Maximum Capacity** on pg.4

2 Actual lamp wattages.

3 For 3-way and 4-way switching, use with Claro switches or other mechanical switches.

4 No derating required if ganged.

5 A physical barrier (partition) must exist when ganging with line-voltage products.

6 For minimum load requirements see **Minimum Load Requirements** on pg. 4

Description	Rating	Model #
ACCESSORIES		
Field Customizable Multi-Port Frame		
6-Port Frame	Shipped with 6 blanks *Shown with blanks*	CA-6PF-▭
Product above: For use with Lutron connectors shown below. Also compatible with Hubble Xcelerator and snap-fit connectors.		
Connectors		
For use with 6-port frame (CA-6PF-). Each connector fills one port.		
Phone Jack	6-conductor, RJ11, Category 3	CON-1P-C3-WH
Phone Jack	8-conductor, RJ45, Category 5e	CON-1P-C5E-WH
Phone Jack	8-conductor, RJ45, Category 6	CON-1P-C6-WH
Fiber Jack	MT-RJ Feed-Through	CON-1F-MTRJ-WH
Fiber Jack	SC Simplex	CON-1F-SC-WH
Fiber Jack	LC Non-Flush Mount	CON-1F-LC-WH
Fiber Jack	ST Style	CON-1F-ST-WH
Cable Jack	F-Style, 75 Ω Coaxial cable	CON-1C-WH
BNC Jack	BNC connector	CON-1B-WH

Connectors available in white (WH) only. For information about additional colors contact Lutron Customer Service.

	Description	Model #


STANDARD WALLPLATES




1-Gang
2.94 in (75 mm) W x 4.69 in (119 mm) H x
0.30 in (7.6 mm) D CW-1-




2-Gang
4.75 in (121 mm) W x 4.69 in (119 mm) H x
0.30 in (7.6 mm) D CW-2-




3-Gang
6.56 in (167 mm) W x 4.69 in (119 mm) H x
0.30 in (7.6 mm) D CW-3-



4-Gang
8.37 in (213 mm) W x 4.69 in (119 mm) H x
0.30 in (7.6 mm) D CW-4-



5-Gang
10.18 in (259 mm) W x 4.69 in (119 mm) H x
0.30 in (7.6 mm) D CW-5-



6-Gang
12.00 in (305 mm) W x 4.69in (119 mm) H x
0.30 in (7.6 mm) D CW-6-


STANDARD COLORS/FINISHES

Gloss Finishes

Add color/finish suffix to model number to order.
Example: DV-600P-**WH**

WH	White
IV	Ivory
AL	Almond
LA	Light Almond
GR	Gray
BR	Brown
BL	Black

DERATING/MAXIMUM CAPACITY

	 No side sections removed (Full Capacity)	 One side section removed (End Units)	 Two side sections removed (Middle Unit)
Incandescent Dimmers			
	600 W 1000 W	500 W 800 W	400 W 650 W
Electronic Low-Voltage			
	300 W	250 W	200 W
Magnetic Low-Voltage			
	600 VA (450 W[1]) 1000 VA (800 W[1])	500 VA (375 W[1]) 800 VA (650 W[1])	400 VA (300 W[1]) 650 VA (500 W[1])
Fluorescent			
Hi-lume/Eco-10 (ECO-Series)	20 ballasts/ 8 A	No derating required	
Tu-Wire[2]	5 A	4 A	3.3 A
Fan-Speed Controls			
	1.5 A	No derating required	

1 Actual lamp wattage.
2 Minimum capacity: 2 ballasts/0.25 A


MINIMUM LOAD REQUIREMENTS

Incandescent/Magnetic Low-Voltage	
	40 W
Electronic Low-Voltage	
	5 W
Fluorescent	
Hi-lume/Eco-10 (ECO-Series)	1 ballast
Tu-Wire[3]	2 ballasts
Fan-Speed Controls	
	.33 A (40 W)

WIRING DIAGRAMS

Wiring Diagram 1
Single-Pole Wiring — **Model #**


DV-600P-
DV-10P-
DVLV-600P-
DVLV-10P-
CA-1PS-

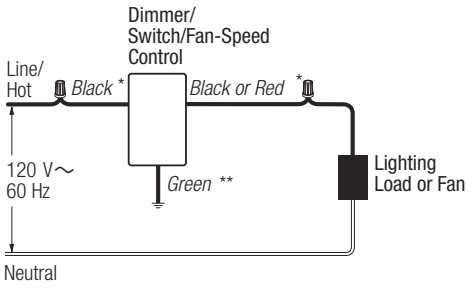

* or Brass screw terminal
** or Green screw terminal

Wiring Diagram 2
Single-Pole Wiring of 3-Way Control — **Model #**


DVFSQ-F-
DVLV-103P-
DVLV-603P-
DV-103P-
DV-603P-

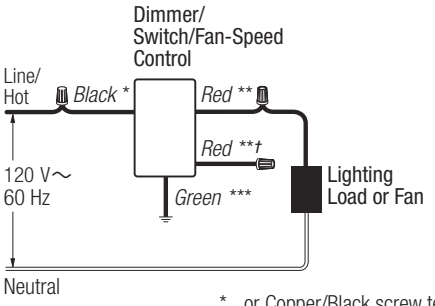

* or Copper/Black screw terminal
** or Brass screw terminal
*** or Green screw terminal
† or Red/White stripe (cap off)


Wiring Diagram 3
Single-Pole Wiring — **Model #**

DVELV-300P-

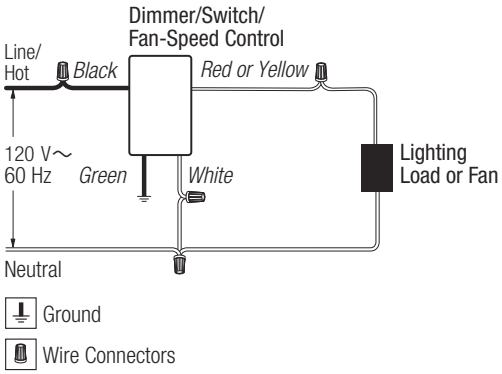

Wiring Diagram 4
3-Way Wiring — **Model #**

DVELV-303P-
CA-3PS-

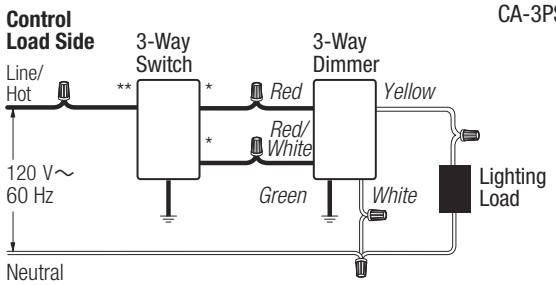


* or Copper/Black screw terminal
** or Brass/Gold screw terminal

Note: 3-way switch must be wired on the line side of the dimmer.


Wiring Diagram 5
3-Way Used as Single-Pole — **Model #**

DVELV-303P-

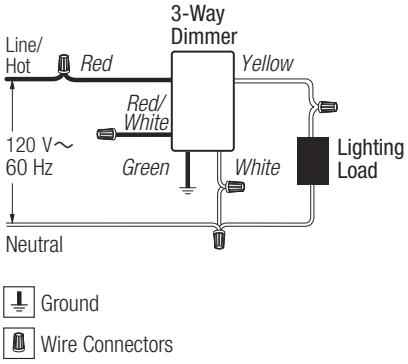

WIRING DIAGRAMS

Wiring Diagram 6
3-Way Wiring

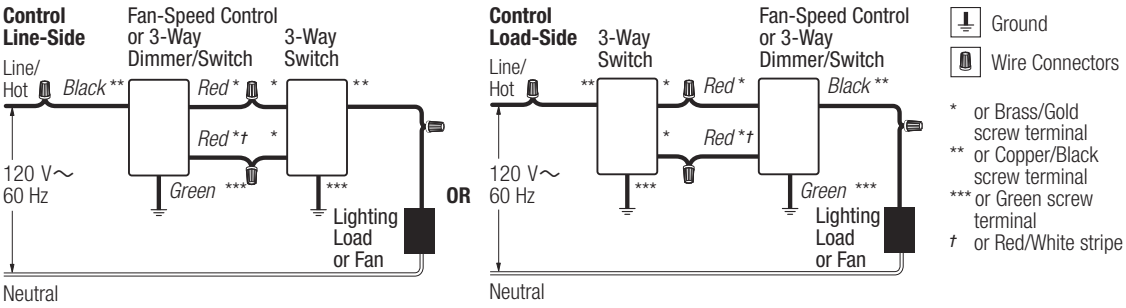

Ground


Wire Connectors

* or Brass/Gold screw terminal
** or Copper/Black screw terminal
*** or Green screw terminal
† or Red/White stripe

Model #

DV-603P-
DV-103P-
DVLV-603P-
DVLV-103P-
DVFSQ-F-
CA-3PS-

Wiring Diagram 7
4-Way Wiring

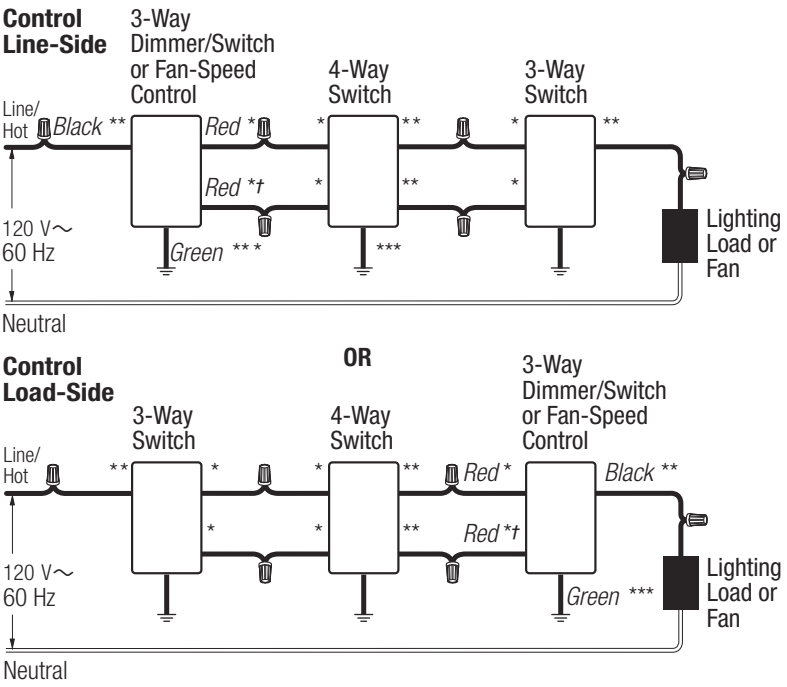

Ground

Wire Connectors

* or Copper/Black screw terminal
** or Brass/Gold screw terminal
*** or Green screw terminal
† or Red/White stripe

Model #


DV-603P-
DV-103P-
DVLV-603P-
DVLV-103P-
DVFSQ-F-
CA-3PS-
CA-4PS-

WIRING DIAGRAMS

Wiring Diagram 8
Single-Pole Wiring of a 3-Way Control

Model #

DVF-103P-
DVF-103P-277-

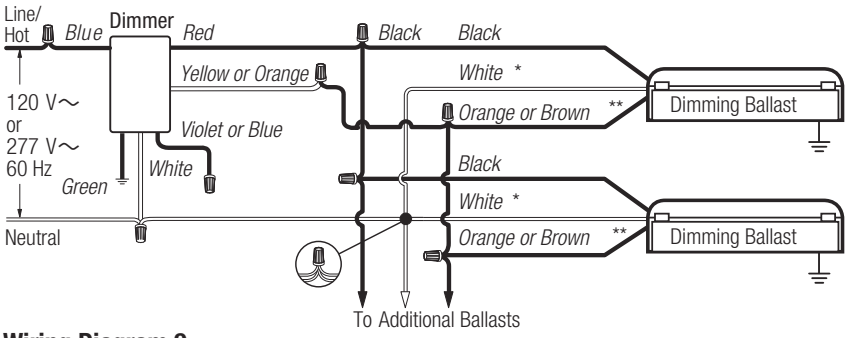

Ground
Wire Connectors
Typical 4-Wire Connection


* must use lamp disconnect sockets with magnetic dimming ballasts
** or Yellow/Blue or Yellow/Green when used with magnetic dimming ballasts

Wiring Diagram 9
3-Way Wiring

Model #

DVF-103P-
DVF-103P-277-
CA-3PS-

Control Load-Side

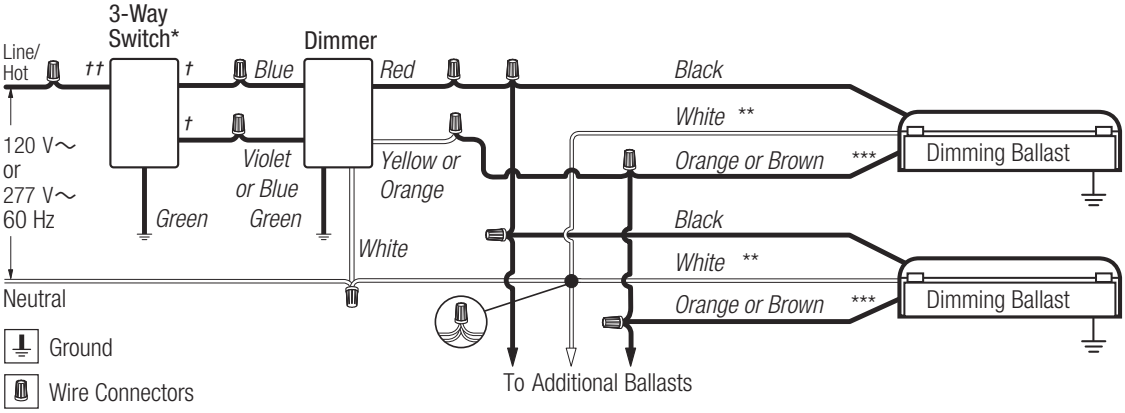


Ground
Wire Connectors
Typical 4-Wire Connection

* 3-Way switch must be wired on line side of dimmer
** must use lamp disconnect sockets with magnetic dimming ballasts
*** or Yellow/Blue or Yellow/Green when used with magnetic dimming ballasts
† or Copper/Black screw terminal
†† or Brass/Gold screw terminal

Wiring Diagram 10
Single-Pole Wiring

Model #

DVFTU-5A3P-

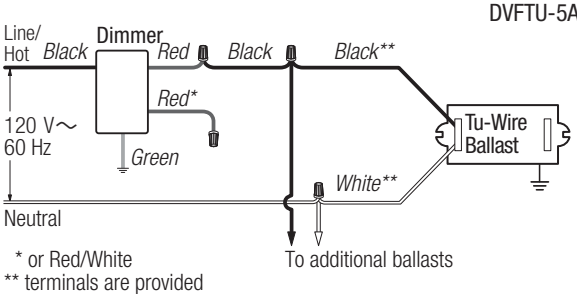


* or Red/White
** terminals are provided

Ground
Wire Connectors

Wiring Diagram 11
3-Way Wiring

Model #

DVTU-5A3P-
CA-3PS-

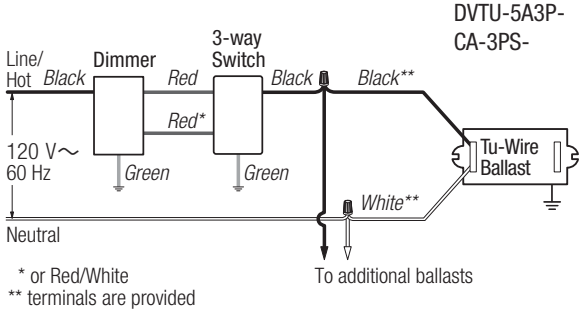

* or Red/White
** terminals are provided


Ground
Wire Connectors

WIRING DIAGRAMS

Wiring Diagram 12
Cable TV Jack Wiring

Model #

CA-CJ-




Cable TV
Jack

Wiring Diagram 13
Telephone Jack Wiring

Model #

CA-PJ-



6-Conductor
Telephone Jack*


Jack Position	Wire Color
1	*White*
2	*Black*
3	*Red*
4	*Green*
5	*Yellow*
6	*Blue*

*accepts most 4-conductor jacks

Wiring Diagram 14
Receptacle Wiring

Model #

CAR-15-

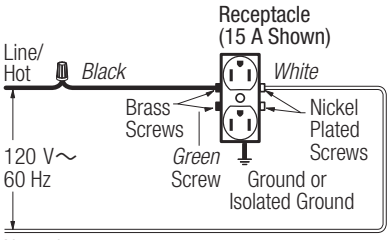

Building Ground
(To Metal Box)


Ground

Wire Connectors

Wiring Diagram 15
GFCI Receptacle Wiring

Model #

CAR-15-GFCI-

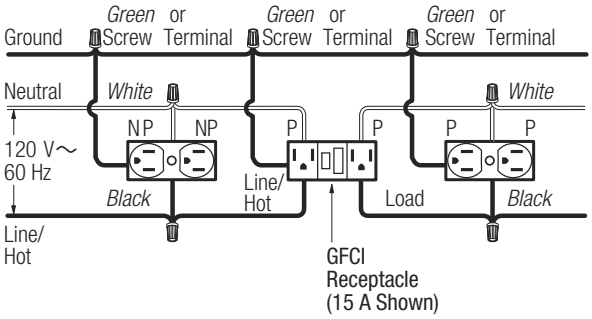


P-Protected
NP-Not Protected

Wire Connectors


Lutron, Lutron, Diva, Claro, Hi-lume, Eco-10, and Tu-Wire are trademarks of Lutron Electronics Co., Inc., registered in the U.S. and other countries.
©2017-2018 Lutron Electronics Co., Inc.

DIVA Controls

The designer dimmer that matches your paddle switches.



Preset Dimmer




Preset Fan-Speed Controls

PRODUCT FAMILY FEATURES


- Large paddle switch with a captive linear-slide dimmer for a standard designer wallplate opening
- Full family of products for most lighting sources
- Dimmers frature built-in soft-glow nightlight
- Uses standard single-pole and 3-way wiring for easy installation in any home
- For mor Diva choices, see the new Diva Satin Colors product line

DIMENSIONS

Front




Profile




*some models up to 1.44 in (37 mm)

CONTROLS AND ACCESSORIES


Preset Dimmers




Fan-Speed Controls



Switches



Receptacles




15 A
Receptacle




15 A
GFCI Receptacle

Telephone/Cable TV Jacks




Single
Telephone Jack




Cable TV
Jack

Ports



6-Port
Frame

Standard Multigang Wallplates

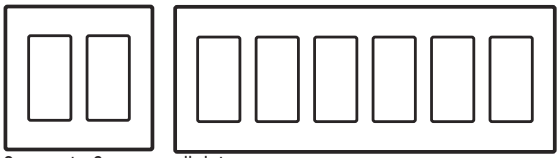

2-gang to 6-gang wallplates

SPECIFICATION SERIES STANDARD FEATURES

- Square Law Dimming
- Power-failure memory
- Electrostatic discharge tested
- RFI suppression
- Captive linear slider
- Precise color matching
- Mechanical air-gap switch to disconnect load power

Lutron controls are rated at 120 V~, 60 Hz unless otherwise noted.

JOB NAME	AREA CONTROLLED
LOCATION	JOB NUMBER
TITLE	PAGE NO.

DIMMERS

Description	Maximum Capacity [1,6]	Model #
Incandescent		
Preset Dimmers with Nightlight		
Single-pole	600 W	DV-600P-
Single-pole	1000 W	DV-10P-
3-way	600 W	DV-603P-
3-way	1000 W	DV-103P-

Note: The nightlight is visible best on the lighter colors. For 3-way and 4-way switching, use with Claro switches or other mechanical switches.

Electronic Low-Voltage		
Preset Dimmers with Nightlight		
Single-pole	300 W	DVELV-300P-
3-way	300 W	DVELV-303P-

Note: Requires neutral wire connection. The nightlight is visible best on the lighter colors. For 3-way and 4-way switching, use with Claro switches or other mechanical switches.

Magnetic Low-Voltage		
Preset Dimmers with Nightlight		
Single-pole	600 VA (450 W)[2]	DVLV-600P-
Single-pole	1000 VA (800 W)[2]	DVLV-10P-
3-way	600 VA (450 W)[2]	DVLV-603P-
3-way	1000 VA (800 W)[2]	DVLV-103P-

Note: The nightlight is visible best on the lighter colors. For 3-way and 4-way switching, use with Claro switches or other mechanical switches.

Fluorescent Dimming with Hi-lume and Eco-10 (ECO-Series) Electronic Ballasts		
Preset Dimmers with Nightlight [4]		
Single-pole/ 3-way	8 A	DVF-103P-
Single-pole/ 3-way, 277 V~	6 A	DVF-103P-277-

Note: Use with Lutron Hi-lume or Eco-10 (ECO-Series) line voltage control Electronic Dimming Ballasts only. Requires neutral wire connection. The nightlight is visible best on the lighter colors. For 3-way and 4-way switching, use with Claro switches or other mechanical switches.

Fluorescent Dimming with Tu-Wire Electronic Ballasts		
Preset Dimmers with Nightlight		
Single-pole/ 3-way	5 A	DVFTU-5A3P-

Note: Use with Lutron Tu-Wire line voltage control electronic dimming ballasts only. The nightlight is visible best on the lighter colors. For 3-way and 4-way switching, use with Claro switches or other mechanical switches.

HI-POWER 2•4•6 DIMMING MODULES

To increase load capacity up to 30,000 W/VA in most popular sources, use one DV-600P- or DV-603P- and add up to five dimming modules. Cannot be used with 0–10 V ⎓ ballast.

FAN-SPEED CONTROLS

Quiet Controls		

For use with one ceiling paddle fan.

Preset Fan-Speed Controls [3,4]		
Single-pole/3-way, 3-speed	1.5 A	DVFSQ-F-
Light Switch/ Fan-Speed Control [4]		
Fan 3-speed with off	1.5 A	DVFSQ-LF-
Single-pole switch:		
Inc./Hal.	2 A	
CFL/LED	1 A	

Note: Does not have soft-glow nightlight.

SWITCHES [4]

General Purpose Switching of all Sources and Motor Loads		
Single-pole, 120/277 V	15 A	CA-1PS-
3-way, 120/277 V	15 A	CA-3PS-
4-way, 120/277 V	15 A	CA-4PS-

ACCESSORIES

Receptacles		
Receptacle [4]		
125 V	15 A	CAR-15-
GFCI Receptacle [4]		
125 V	15 A	CAR-15-GFCI-

Telephone and Cable Television Jacks

A physical barrier (partition) must exist when ganging with line-voltage products

Single Telephone Jack [5]		
6-conductor, RJ11		CA-PJ-

Note: Also accepts most 4-conductor plugs.

Cable TV Jack [4,5]		
F-STYLE		
75 Ω, coaxial cable jack		CA-CJ-

1 For capacities in multigang installations see **Derating/Maximum Capacity** on pg.4

2 Actual lamp wattages.

3 For 3-way and 4-way switching, use with Claro switches or other mechanical switches.

4 No derating required if ganged.

5 A physical barrier (partition) must exist when ganging with line-voltage products.

6 For minimum load requirements see **Minimum Load Requirements** on pg. 4

Description	Rating	Model #
ACCESSORIES		
Field Customizable Multi-Port Frame		
6-Port Frame	Shipped with 6 blanks *Shown with blanks*	CA-6PF-▭
Product above: For use with Lutron connectors shown below. Also compatible with Hubble Xcelerator and snap-fit connectors.		
Connectors		
For use with 6-port frame (CA-6PF-). Each connector fills one port.		
Phone Jack	6-conductor, RJ11, Category 3	CON-1P-C3-WH
Phone Jack	8-conductor, RJ45, Category 5e	CON-1P-C5E-WH
Phone Jack	8-conductor, RJ45, Category 6	CON-1P-C6-WH
Fiber Jack	MT-RJ Feed-Through	CON-1F-MTRJ-WH
Fiber Jack	SC Simplex	CON-1F-SC-WH
Fiber Jack	LC Non-Flush Mount	CON-1F-LC-WH
Fiber Jack	ST Style	CON-1F-ST-WH
Cable Jack	F-Style, 75 Ω Coaxial cable	CON-1C-WH
BNC Jack	BNC connector	CON-1B-WH

Connectors available in white (WH) only. For information about additional colors contact Lutron Customer Service.

	Description	Model #


STANDARD WALLPLATES




1-Gang
2.94 in (75 mm) W x 4.69 in (119 mm) H x
0.30 in (7.6 mm) D CW-1-




2-Gang
4.75 in (121 mm) W x 4.69 in (119 mm) H x
0.30 in (7.6 mm) D CW-2-




3-Gang
6.56 in (167 mm) W x 4.69 in (119 mm) H x
0.30 in (7.6 mm) D CW-3-



4-Gang
8.37 in (213 mm) W x 4.69 in (119 mm) H x
0.30 in (7.6 mm) D CW-4-



5-Gang
10.18 in (259 mm) W x 4.69 in (119 mm) H x
0.30 in (7.6 mm) D CW-5-



6-Gang
12.00 in (305 mm) W x 4.69in (119 mm) H x
0.30 in (7.6 mm) D CW-6-


STANDARD COLORS/FINISHES

Gloss Finishes

Add color/finish suffix to model number to order.
Example: DV-600P-**WH**

WH	White
IV	Ivory
AL	Almond
LA	Light Almond
GR	Gray
BR	Brown
BL	Black

DERATING/MAXIMUM CAPACITY

	 No side sections removed (Full Capacity)	 One side section removed (End Units)	 Two side sections removed (Middle Unit)
Incandescent Dimmers			
	600 W 1000 W	500 W 800 W	400 W 650 W
Electronic Low-Voltage			
	300 W	250 W	200 W
Magnetic Low-Voltage			
	600 VA (450 W[1]) 1000 VA (800 W[1])	500 VA (375 W[1]) 800 VA (650 W[1])	400 VA (300 W[1]) 650 VA (500 W[1])
Fluorescent			
Hi-lume/Eco-10 (ECO-Series)	20 ballasts/ 8 A	No derating required	
Tu-Wire[2]	5 A	4 A	3.3 A
Fan-Speed Controls			
	1.5 A	No derating required	

1 Actual lamp wattage.
2 Minimum capacity: 2 ballasts/0.25 A


MINIMUM LOAD REQUIREMENTS

Incandescent/Magnetic Low-Voltage	
	40 W
Electronic Low-Voltage	
	5 W
Fluorescent	
Hi-lume/Eco-10 (ECO-Series)	1 ballast
Tu-Wire[3]	2 ballasts
Fan-Speed Controls	
	.33 A (40 W)

WIRING DIAGRAMS

Wiring Diagram 1
Single-Pole Wiring — **Model #**


DV-600P-
DV-10P-
DVLV-600P-
DVLV-10P-
CA-1PS-

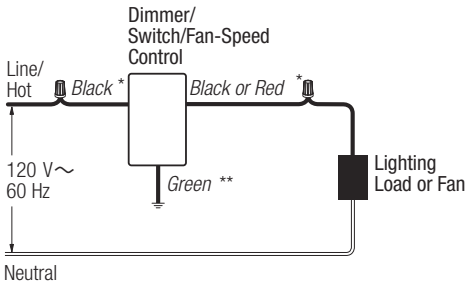

* or Brass screw terminal
** or Green screw terminal

Wiring Diagram 2
Single-Pole Wiring of 3-Way Control — **Model #**


DVFSQ-F-
DVLV-103P-
DVLV-603P-
DV-103P-
DV-603P-

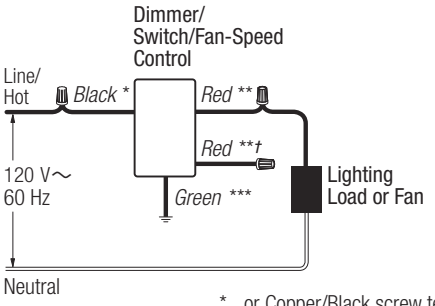

* or Copper/Black screw terminal
** or Brass screw terminal
*** or Green screw terminal
† or Red/White stripe (cap off)


Wiring Diagram 3
Single-Pole Wiring — **Model #**

DVELV-300P-

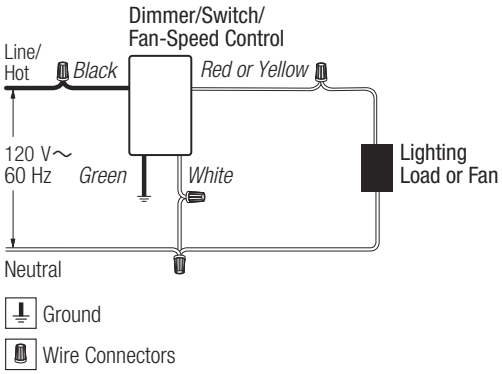

Wiring Diagram 4
3-Way Wiring — **Model #**

DVELV-303P-
CA-3PS-

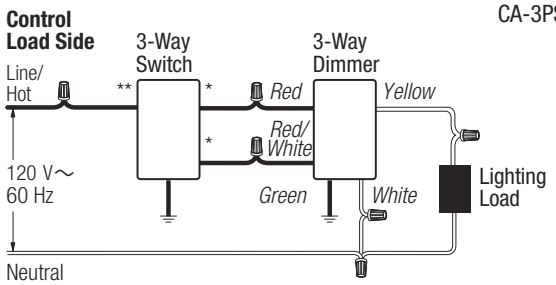


* or Copper/Black screw terminal
** or Brass/Gold screw terminal

Note: 3-way switch must be wired on the line side of the dimmer.


Wiring Diagram 5
3-Way Used as Single-Pole — **Model #**

DVELV-303P-

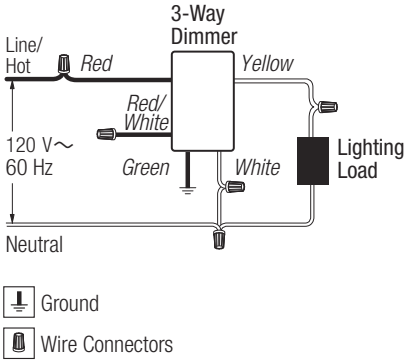

WIRING DIAGRAMS

Wiring Diagram 6
3-Way Wiring

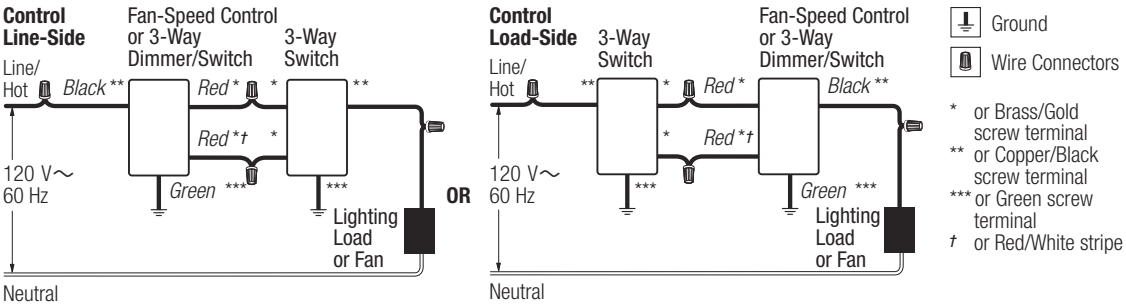

Ground


Wire Connectors

* or Brass/Gold screw terminal
** or Copper/Black screw terminal
*** or Green screw terminal
† or Red/White stripe

Model #

DV-603P-
DV-103P-
DVLV-603P-
DVLV-103P-
DVFSQ-F-
CA-3PS-

Wiring Diagram 7
4-Way Wiring

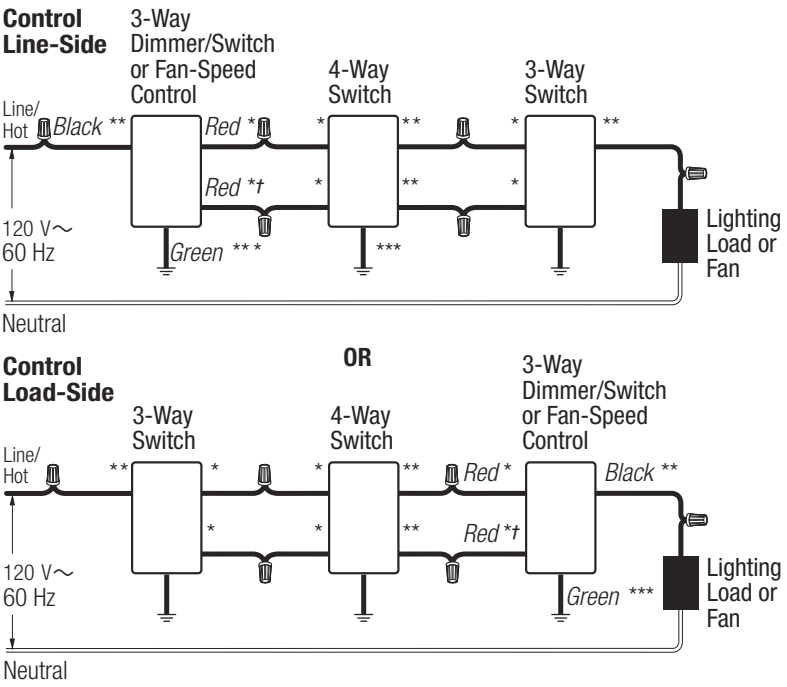

Ground

Wire Connectors

* or Copper/Black screw terminal
** or Brass/Gold screw terminal
*** or Green screw terminal
† or Red/White stripe

Model #


DV-603P-
DV-103P-
DVLV-603P-
DVLV-103P-
DVFSQ-F-
CA-3PS-
CA-4PS-

WIRING DIAGRAMS

Wiring Diagram 8
Single-Pole Wiring of a 3-Way Control

Model #

DVF-103P-
DVF-103P-277-

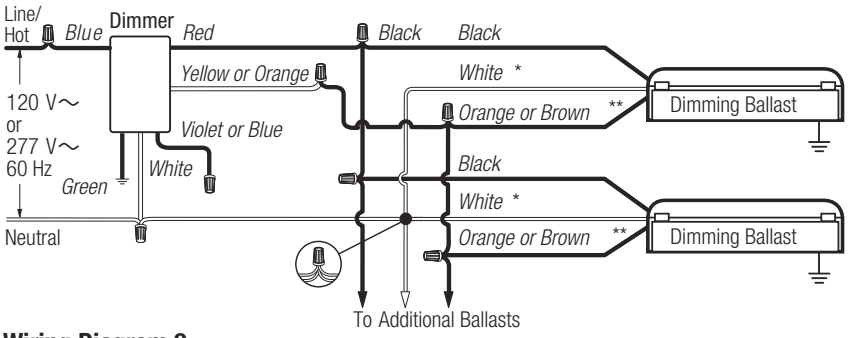

Ground
Wire Connectors
Typical 4-Wire Connection


* must use lamp disconnect sockets with magnetic dimming ballasts
** or Yellow/Blue or Yellow/Green when used with magnetic dimming ballasts

Wiring Diagram 9
3-Way Wiring

Model #

DVF-103P-
DVF-103P-277-
CA-3PS-

Control Load-Side

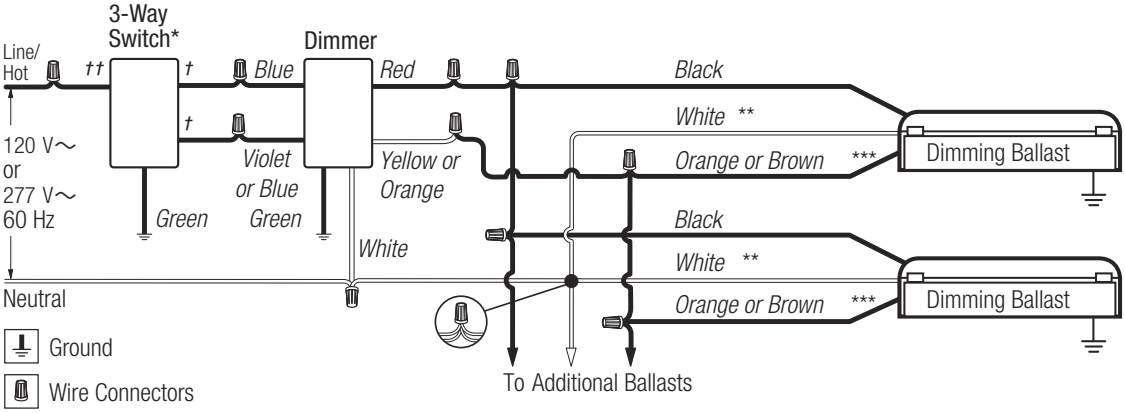


Ground
Wire Connectors
Typical 4-Wire Connection

* 3-Way switch must be wired on line side of dimmer
** must use lamp disconnect sockets with magnetic dimming ballasts
*** or Yellow/Blue or Yellow/Green when used with magnetic dimming ballasts
† or Copper/Black screw terminal
†† or Brass/Gold screw terminal

Wiring Diagram 10
Single-Pole Wiring

Model #

DVFTU-5A3P-

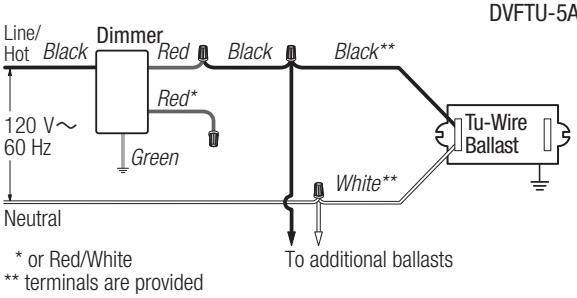


* or Red/White
** terminals are provided

Ground
Wire Connectors

Wiring Diagram 11
3-Way Wiring

Model #

DVTU-5A3P-
CA-3PS-

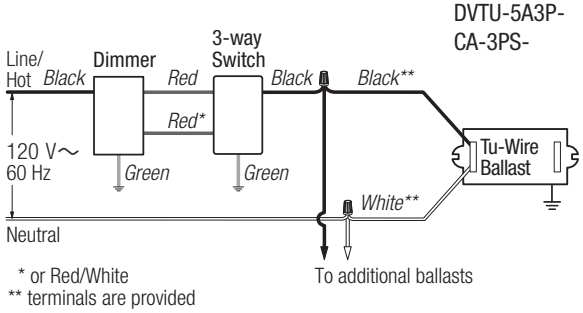

* or Red/White
** terminals are provided


Ground
Wire Connectors

WIRING DIAGRAMS

Wiring Diagram 12
Cable TV Jack Wiring

Model #

CA-CJ-




Cable TV
Jack

Wiring Diagram 13
Telephone Jack Wiring

Model #

CA-PJ-



6-Conductor
Telephone Jack*


Jack Position	Wire Color
1	*White*
2	*Black*
3	*Red*
4	*Green*
5	*Yellow*
6	*Blue*

*accepts most 4-conductor jacks

Wiring Diagram 14
Receptacle Wiring

Model #

CAR-15-

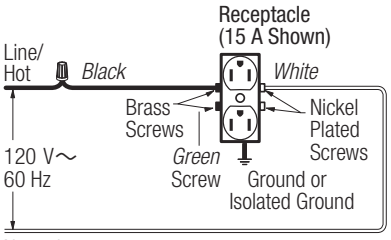

Building Ground
(To Metal Box)


Ground

Wire Connectors

Wiring Diagram 15
GFCI Receptacle Wiring

Model #

CAR-15-GFCI-

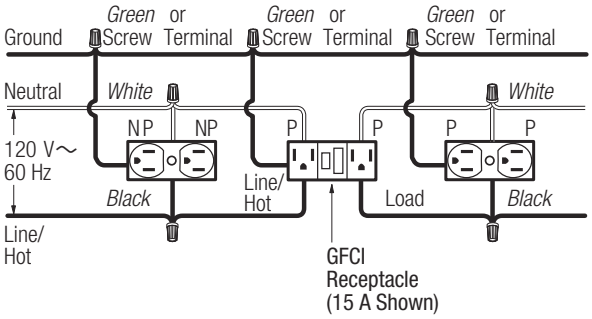

P-Protected
NP-Not Protected

Wire Connectors

Lutron, Lutron, Diva, Claro, Hi-lume, Eco-10, and Tu-Wire are trademarks of Lutron Electronics Co., Inc., registered in the U.S. and other countries.
©2017-2018 Lutron Electronics Co., Inc.