

### FAZ Circuit Breakers



*Optimum and Efficient Protection for Every Application*

### Contents

#### Description

|   | <i>Page</i>     |
|---|-----------------|
| FAZ Circuit Breakers . . . . .              | <b>V4-T1-67</b> |
| Catalog Number Selection . . . . .          | <b>V4-T1-68</b> |
| Standards and Certifications . . . . .      | <b>V4-T1-68</b> |
| Product Selection . . . . .                 | <b>V4-T1-69</b> |
| Accessories . . . . .                       | <b>V4-T1-75</b> |
| Technical Data and Specifications . . . . . | <b>V4-T1-78</b> |
| Dimensions . . . . .                        | <b>V4-T1-85</b> |

## FAZ Circuit Breakers

### Product Overview

Optimum product quality, tested reliability and safety stand for best protection of personnel, installations and plant. Eaton's FAZ DIN rail mountable circuit breaker is designed for use in control panel applications.

### Powerful offering for machine and system builders

The FAZ is available with B, C, D, K, S, and Z characteristics in accordance with UL 1077, CSA C22.2 No.235 and IEC 60947-2. These devices are CE marked.

### Application Description

- Supplementary protection
- Control circuits
- Lighting
- Business equipment
- Appliances

### Features

- Complete range of UL 1077 recognized DIN rail mounted miniature circuit breakers up to 63A current rating
- Standard ratings of 10 kAIC up to 277/480 Vac
- Current limiting design provides fast short-circuit interruption that reduces the let-through energy, which can damage the circuit
- Suitable for supplementary protection
- Thermal-magnetic overcurrent protection
  - Six levels of short-circuit protection, categorized by B, C, D, K, S, and Z curves
- Trip-free design—breaker can not be defeated by holding the handle in the ON position
- Captive screws cannot be lost
- Fulfill UL 1077, CSA C22.2 No.235 and also IEC 60947-2 Standard
- Field-installable shunt trip and auxiliary switch subsequent mounting
- Module width of only 17.7 mm (per pole)
- Contact position indicator (red/green)
- Easy installation on DIN rail
- Possibility for sealing the toggle in ON or OFF position

# 1.3

## Miniature Circuit Breakers and Supplementary Protectors

### UL 1077 DIN Rail Supplementary Protectors

1

#### Discover These Advanced Features

Breakers install on standard DIN rail

Available in one-, two-, three-, four-pole, 1+N and 3+N models

Color-coded indicator provides breaker status for easy troubleshooting



Captive Posidrive terminal screws with finger and back-of-hand protection (IP20)

Trip-free design; breaker cannot be defeated by holding the handle in the ON position

Breaker information printed on the front of the device for quick identification

#### Standards and Certifications


FAZ complies with the latest national and international standards.

- UL 1077, CSA C22.2 No. 235
- Apply to supplementary protectors intended for use as overcurrent, or overvoltage or undervoltage protection within an appliance or other electrical equipment where branch circuit protection is already provided, or is not required

- RoHS compliant
- VDE compliant
  - Devices with B, C, and D curves are VDE compliant
- CCC
  - Devices with B, C, and D curves are CCC compliant
- ABS compliant



#### Catalog Number Selection

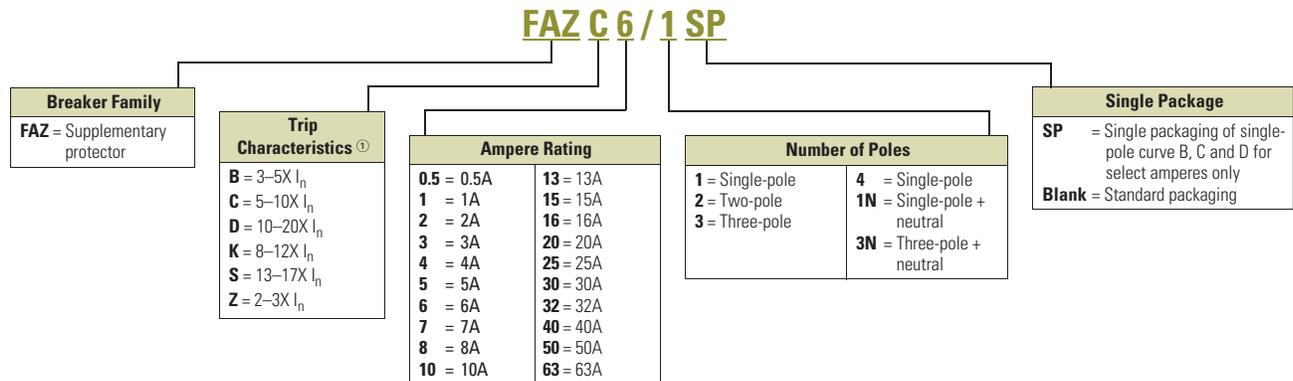

**Note**

<sup>①</sup> I<sub>n</sub> = Rated current for instantaneous trip characteristics.

# 1.3

## Miniature Circuit Breakers and Supplementary Protectors


### UL 1077 DIN Rail Supplementary Protectors

1

#### FAZ C curve (5–10X $I_n$ current rating)

- Designed for inductive loads
- Response time of instantaneous trip: 5–10X  $I_n$  current rating
- UL recognized and CSA Certified as supplementary protectors
- For international and domestic use (conform to IEC 60947-2)
- UL file number 177451

Suitable for applications where medium levels of inrush current are expected. Instantaneous trip is 5–10X rating of device ( $I_n$ ). Applications include small transformers, lighting, pilot devices, control circuits and coils. Medium magnetic trip point.

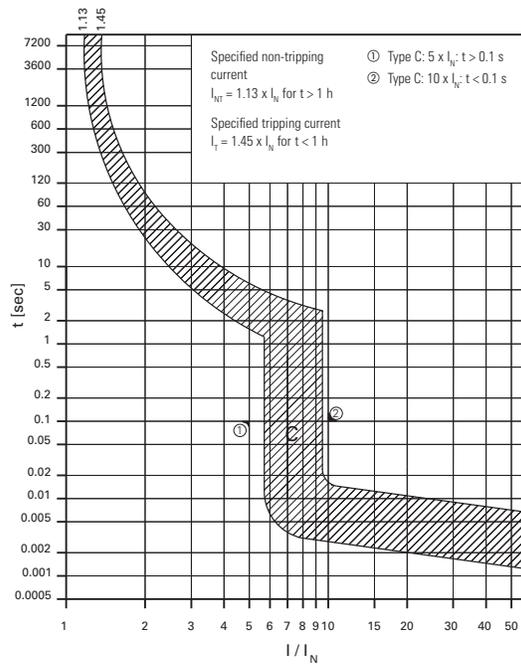

#### Single-Pole



#### C Curve (5–10X $I_n$ Current Rating)—Designed Inductive Loads ①

| Amperes | Single-Pole ②<br>Catalog Number | Two-Pole<br>Catalog Number | Three-Pole<br>Catalog Number |
|---------|---------------------------------|----------------------------|------------------------------|
| 0.5     | FAZ-C0.5/1-SP                   | FAZ-C0.5/2                 | FAZ-C0.5/3                   |
| 1       | FAZ-C1/1-SP                     | FAZ-C1/2                   | FAZ-C1/3                     |
| 1.6     | FAZ-C1.6/1-SP                   | FAZ-C1.6/2                 | FAZ-C1.6/3                   |
| 2       | FAZ-C2/1-SP                     | FAZ-C2/2                   | FAZ-C2/3                     |
| 3       | FAZ-C3/1-SP                     | FAZ-C3/2                   | FAZ-C3/3                     |
| 4       | FAZ-C4/1-SP                     | FAZ-C4/2                   | FAZ-C4/3                     |
| 5       | FAZ-C5/1-SP                     | FAZ-C5/2                   | FAZ-C5/3                     |
| 6       | FAZ-C6/1-SP                     | FAZ-C6/2                   | FAZ-C6/3                     |
| 7       | FAZ-C7/1-SP                     | FAZ-C7/2                   | FAZ-C7/3                     |
| 8       | FAZ-C8/1-SP                     | FAZ-C8/2                   | FAZ-C8/3                     |
| 10      | FAZ-C10/1-SP                    | FAZ-C10/2                  | FAZ-C10/3                    |
| 13      | FAZ-C13/1-SP                    | FAZ-C13/2                  | FAZ-C13/3                    |
| 15      | FAZ-C15/1-SP                    | FAZ-C15/2                  | FAZ-C15/3                    |
| 16      | FAZ-C16/1-SP                    | FAZ-C16/2                  | FAZ-C16/3                    |
| 20      | FAZ-C20/1-SP                    | FAZ-C20/2                  | FAZ-C20/3                    |
| 25      | FAZ-C25/1-SP                    | FAZ-C25/2                  | FAZ-C25/3                    |
| 30      | FAZ-C30/1-SP                    | FAZ-C30/2                  | FAZ-C30/3                    |
| 32      | FAZ-C32/1-SP                    | FAZ-C32/2                  | FAZ-C32/3                    |
| 40      | FAZ-C40/1-SP                    | FAZ-C40/2                  | FAZ-C40/3                    |
| 50      | FAZ-C50/1-SP                    | FAZ-C50/2                  | FAZ-C50/3                    |
| 63      | FAZ-C63/1-SP                    | FAZ-C63/2                  | FAZ-C63/3                    |

#### Two-Pole



#### Three-Pole



#### Four-Pole



#### Single-Pole + Neutral



#### Three-Pole + Neutral



#### C Curve (5–10X $I_n$ Current Rating)—Designed Inductive Loads, continued ①

| Amperes | Four-Pole<br>Catalog Number | Single-Pole + Neutral<br>Catalog Number | Three-Pole + Neutral<br>Catalog Number |
|---------|-----------------------------|---|--|
| 0.5     | FAZ-C0.5/4                  | FAZ-C0.5/1N                             | FAZ-C0.5/3N                            |
| 1       | FAZ-C1/4                    | FAZ-C1/1N                               | FAZ-C1/3N                              |
| 1.6     | FAZ-C1.6/4                  | FAZ-C1.6/1N                             | FAZ-C1.6/3N                            |
| 2       | FAZ-C2/4                    | FAZ-C2/1N                               | FAZ-C2/3N                              |
| 3       | FAZ-C3/4                    | FAZ-C3/1N                               | FAZ-C3/3N                              |
| 4       | FAZ-C4/4                    | FAZ-C4/1N                               | FAZ-C4/3N                              |
| 5       | FAZ-C5/4                    | FAZ-C5/1N                               | FAZ-C5/3N                              |
| 6       | FAZ-C6/4                    | FAZ-C6/1N                               | FAZ-C6/3N                              |
| 7       | FAZ-C7/4                    | FAZ-C7/1N                               | FAZ-C7/3N                              |
| 8       | FAZ-C8/4                    | FAZ-C8/1N                               | FAZ-C8/3N                              |
| 10      | FAZ-C10/4                   | FAZ-C10/1N                              | FAZ-C10/3N                             |
| 13      | FAZ-C13/4                   | FAZ-C13/1N                              | FAZ-C13/3N                             |
| 15      | FAZ-C15/4                   | FAZ-C15/1N                              | FAZ-C15/3N                             |
| 16      | FAZ-C16/4                   | FAZ-C16/1N                              | FAZ-C16/3N                             |
| 20      | FAZ-C20/4                   | FAZ-C20/1N                              | FAZ-C20/3N                             |
| 25      | FAZ-C25/4                   | FAZ-C25/1N                              | FAZ-C25/3N                             |
| 30      | FAZ-C30/4                   | FAZ-C30/1N                              | FAZ-C30/3N                             |
| 32      | FAZ-C32/4                   | FAZ-C32/1N                              | FAZ-C32/3N                             |
| 40      | FAZ-C40/4                   | FAZ-C40/1N                              | FAZ-C40/3N                             |
| 50      | FAZ-C50/4                   | FAZ-C50/1N                              | FAZ-C50/3N                             |
| 63      | FAZ-C63/4                   | FAZ-C63/1N                              | FAZ-C63/3N                             |

#### Notes

- ① In North America, these switches are UL recognized and CSA Certified as supplementary protection devices. Per the intent of NEC (National Electrical Code), Article 240, and CEC (Canadian Electrical Code), Part 1 C22.1, supplementary breakers cannot be used as a substitute for the branch circuit protective device. They can be used to provide overcurrent protection within an appliance or other electrical equipment where branch circuit overcurrent protection is already provided, or is not required.
- ② Option for single packaging on single-pole B, C and D curves only; add suffix SP when ordering.