

# Flexible Aluminum Ducting



- This duct is ideal for applications where code requires an all aluminum U.L./cU.L. Listed Class 0 air duct
- Totally non combustible with a maximum operating temperature of 435°F
- The continuous lock seam permits the duct to be pulled open, compressed, bent and re-bent without developing leakage
- The UL version is UL 2158A listed and marked for dryer venting purposes. It's thicker than the standard duct and allows for easy rotation and more durable handling

| Product Code | UPC Code<br>060672 | Size                       | Packaging       | Pack Qty. | Pack Wt.<br>(lbs) | Pack Cube<br>(cu. ft.) |
|--------------|--------------------|----------------------------|-----------------|-----------|-------------------|------------------------|
| MFX38        | 130702             | 3" x 8'                    | Retail Bag      | 10        | 8                 | 2.01                   |
| MFX38X       | 133680             | 3" x 8'                    | Bulk            | 10        | 8                 | 2.01                   |
| MFX38XZW     | 130702             | 3" x 8'                    | Bulk / Cut Case | 12        | 10                | 2.37                   |
| MFX325X      | 137503             | 3" x 25'                   | Bulk            | 5         | 11                | 5.13                   |
| MFX45        | 130672             | 4" x 5'                    | Retail Bag      | 10        | 8                 | 3.14                   |
| MFX45X       | 130733             | 4" x 5'                    | Bulk            | 10        | 7                 | 3.14                   |
| MFX46C2XZW   | 132003             | 4" x 6' with collars       | Bulk / Cut Case | 16        | 13                | 5.14                   |
| MFX48        | 130689             | 4" x 8'                    | Retail Bag      | 10        | 10                | 3.14                   |
| MFX48ULXZW   | 134779             | 4" x 8' UL listed & marked | Bulk / Cut Case | 16        | 16.5              | 5.14                   |
| MFX48X       | 134670             | 4" x 8'                    | Bulk            | 10        | 10                | 3.14                   |
| MFX48XZW     | 137015             | 4" x 8'                    | Bulk / Cut Case | 16        | 13                | 5.14                   |
| MFX425X      | 137510             | 4" x 25'                   | Bulk            | 4         | 12                | 5.13                   |
| MFX58        | 135677             | 5" x 8'                    | Retail Bag      | 6         | 8                 | 2.92                   |
| MFX58X       | 135684             | 5" x 8'                    | Bulk            | 6         | 8                 | 2.92                   |
| MFX58XZW     | 130832             | 5" x 8'                    | Bulk / Cut Case | 6         | 8                 | 2.92                   |
| MFX68        | 130696             | 6" x 8'                    | Retail Bag      | 4         | 7                 | 2.79                   |
| MFX68X       | 135707             | 6" x 8'                    | Bulk            | 4         | 7                 | 2.79                   |
| MFX68XZW     | 130795             | 6" x 8'                    | Bulk / Cut Case | 4         | 7                 | 3.12                   |
| MFX78X       | 137688             | 7" x 8'                    | Bulk            | 5         | 10                | 5.18                   |
| MFX88X       | 138685             | 8" x 8'                    | Bulk            | 4         | 9                 | 5.18                   |

#### Code Compliance:

Dundas Jafine recommends that you check with the local code body, having jurisdiction in your area, to determine applicable codes. UL 181, NFPA 90A & 90B, BOCA, ICBO, SBCC, HUD/FHA MIN. Property STD.

**Flame Spread:** Zero

**Smoke Developed:** Zero

**Temperature Range:** -100°F to 435°F

**Maximum Velocity:** 5000 FPM

---

#### 3" to 10" Diameter

**Static Pressure - Positive:** 12 in. WC

**Static Pressure - Negative:** 12 in. WC

---

#### 12" to 20" Diameter

**Static Pressure - Positive:** 8 in. WC


**Static Pressure - Negative:** 8 in. WC

**Bending Radius:** 1 x diameter

**Permeance:** Near Zero

**Maximum Installed Length:** None

# Air Friction Loss in Straight Runs

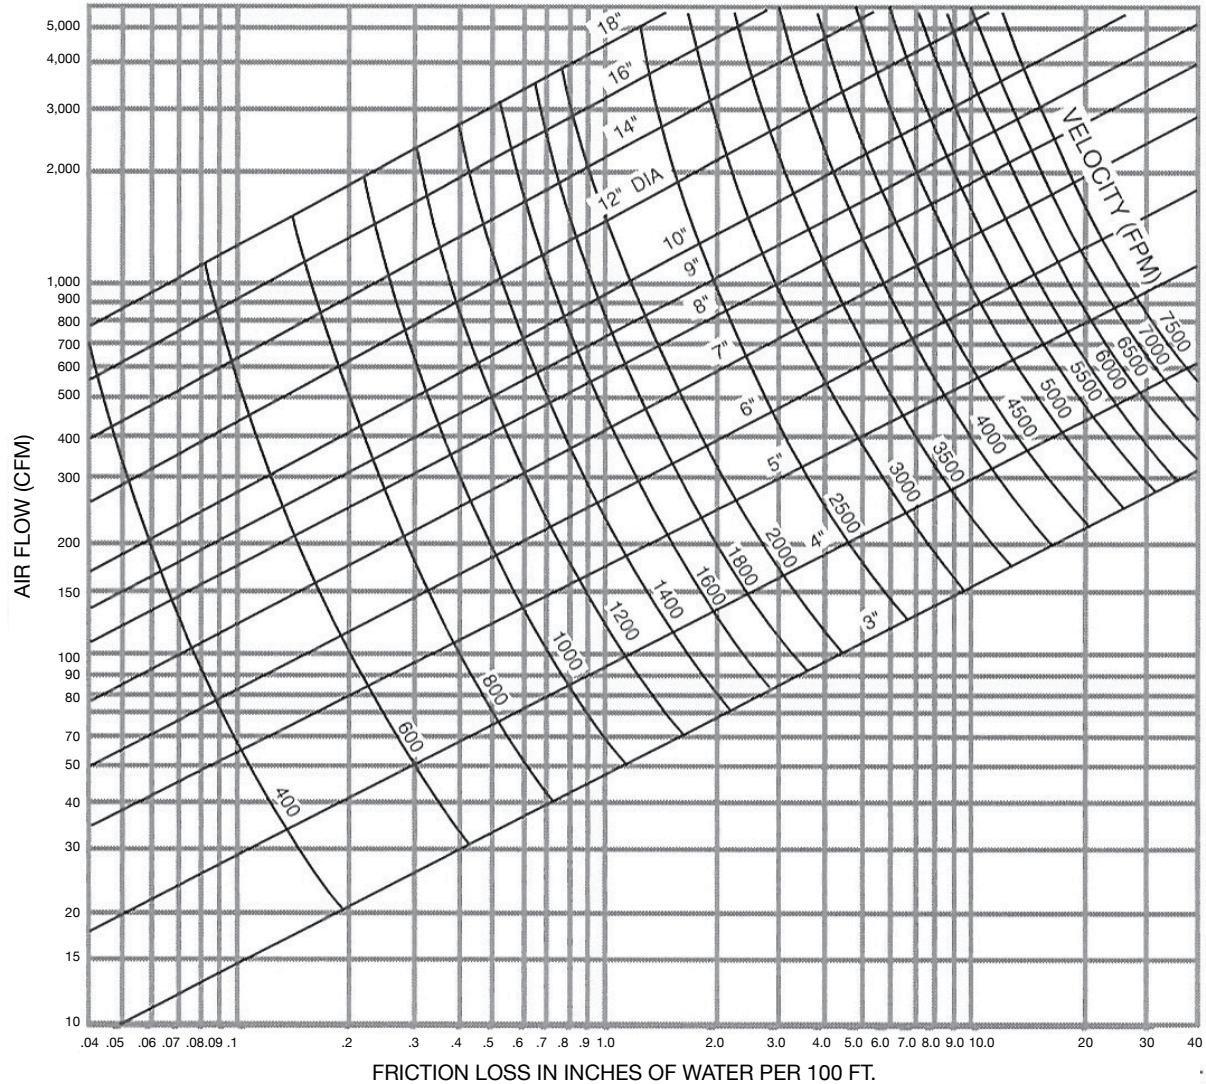

Scan this QR code  
to view helpful  
product feature and  
installation videos



# Flexible Aluminum Ducting



- This duct is ideal for applications where code requires an all aluminum U.L./cU.L. Listed Class 0 air duct
- Totally non combustible with a maximum operating temperature of 435°F
- The continuous lock seam permits the duct to be pulled open, compressed, bent and re-bent without developing leakage
- The UL version is UL 2158A listed and marked for dryer venting purposes. It's thicker than the standard duct and allows for easy rotation and more durable handling

| Product Code | UPC Code<br>060672 | Size                       | Packaging       | Pack Qty. | Pack Wt.<br>(lbs) | Pack Cube<br>(cu. ft.) |
|--------------|--------------------|----------------------------|-----------------|-----------|-------------------|------------------------|
| MFX38        | 130702             | 3" x 8'                    | Retail Bag      | 10        | 8                 | 2.01                   |
| MFX38X       | 133680             | 3" x 8'                    | Bulk            | 10        | 8                 | 2.01                   |
| MFX38XZW     | 130702             | 3" x 8'                    | Bulk / Cut Case | 12        | 10                | 2.37                   |
| MFX325X      | 137503             | 3" x 25'                   | Bulk            | 5         | 11                | 5.13                   |
| MFX45        | 130672             | 4" x 5'                    | Retail Bag      | 10        | 8                 | 3.14                   |
| MFX45X       | 130733             | 4" x 5'                    | Bulk            | 10        | 7                 | 3.14                   |
| MFX46C2XZW   | 132003             | 4" x 6' with collars       | Bulk / Cut Case | 16        | 13                | 5.14                   |
| MFX48        | 130689             | 4" x 8'                    | Retail Bag      | 10        | 10                | 3.14                   |
| MFX48ULXZW   | 134779             | 4" x 8' UL listed & marked | Bulk / Cut Case | 16        | 16.5              | 5.14                   |
| MFX48X       | 134670             | 4" x 8'                    | Bulk            | 10        | 10                | 3.14                   |
| MFX48XZW     | 137015             | 4" x 8'                    | Bulk / Cut Case | 16        | 13                | 5.14                   |
| MFX425X      | 137510             | 4" x 25'                   | Bulk            | 4         | 12                | 5.13                   |
| MFX58        | 135677             | 5" x 8'                    | Retail Bag      | 6         | 8                 | 2.92                   |
| MFX58X       | 135684             | 5" x 8'                    | Bulk            | 6         | 8                 | 2.92                   |
| MFX58XZW     | 130832             | 5" x 8'                    | Bulk / Cut Case | 6         | 8                 | 2.92                   |
| MFX68        | 130696             | 6" x 8'                    | Retail Bag      | 4         | 7                 | 2.79                   |
| MFX68X       | 135707             | 6" x 8'                    | Bulk            | 4         | 7                 | 2.79                   |
| MFX68XZW     | 130795             | 6" x 8'                    | Bulk / Cut Case | 4         | 7                 | 3.12                   |
| MFX78X       | 137688             | 7" x 8'                    | Bulk            | 5         | 10                | 5.18                   |
| MFX88X       | 138685             | 8" x 8'                    | Bulk            | 4         | 9                 | 5.18                   |

#### Code Compliance:

Dundas Jafine recommends that you check with the local code body, having jurisdiction in your area, to determine applicable codes. UL 181, NFPA 90A & 90B, BOCA, ICBO, SBCC, HUD/FHA MIN. Property STD.

**Flame Spread:** Zero

**Smoke Developed:** Zero

**Temperature Range:** -100°F to 435°F

**Maximum Velocity:** 5000 FPM

---

#### 3" to 10" Diameter

**Static Pressure - Positive:** 12 in. WC

**Static Pressure - Negative:** 12 in. WC

---

#### 12" to 20" Diameter

**Static Pressure - Positive:** 8 in. WC


**Static Pressure - Negative:** 8 in. WC

**Bending Radius:** 1 x diameter

**Permeance:** Near Zero

**Maximum Installed Length:** None

# Air Friction Loss in Straight Runs

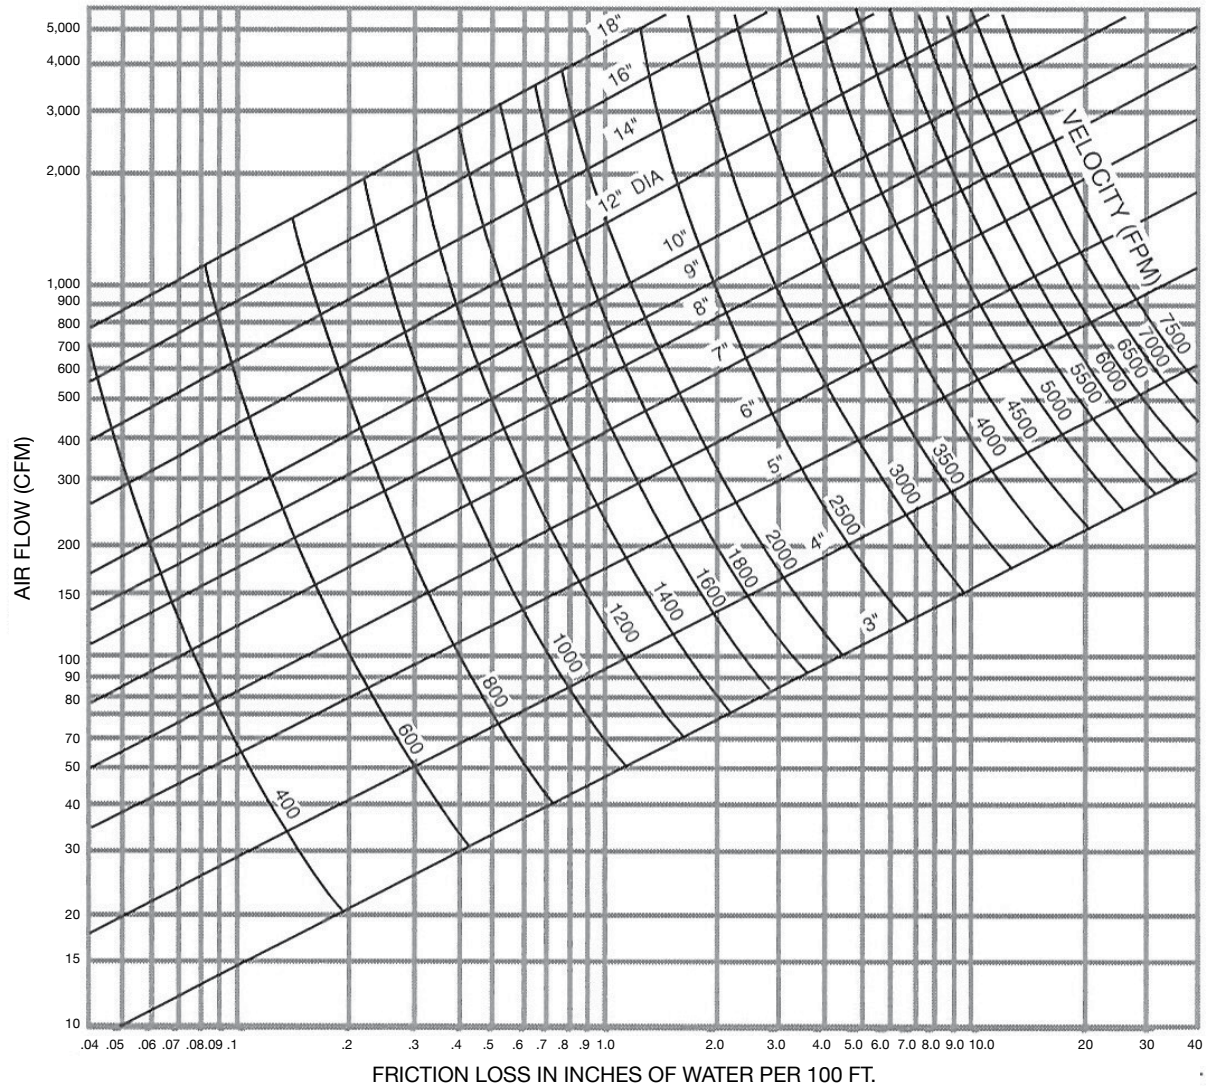

Scan this QR code  
to view helpful  
product feature and  
installation videos