



# OFM LED

## LED Canopy/Ceiling Luminaire





### Specifications

**Width:** 10"  
(25.4 cm)

**Height:** 4"  
(10.16 cm)

**Depth:** 10"  
(22.3 cm)

**Weight:** 4.25 lbs.  
(1.93 kg)

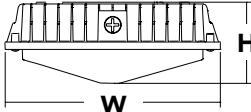

Catalog  
Number

Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.

### Introduction

The OFM LED luminaire is economical and energy efficient, capable of replacing a 150W metal halide luminaire while saving 70% in energy costs. With an expected service life of more than 10 years, the OFM LED eliminates frequent lamp and ballast replacements associated with traditional technologies.

### Ordering Information

**EXAMPLE:** OFM LED P1 50K MVOLT DDB HP17

OFM LED				
Series	Performance Package	Color Temperature <sup>1</sup>	Voltage	Finish
OFM LED	P1 4,200 lumens	50K 5000K	MVOLT <sup>2</sup>	DDB HP17 Dark bronze

#### NOTES

1. Correlated color temperature (CCT) shown is nominal per ANSI C78.377-2008.
2. MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).

### FEATURES & SPECIFICATIONS

#### INTENDED USE

47 watt LED ceiling light delivers 4,200 lumens for an energy-efficient replacement of 150W MH canopy/ceiling lights. Traditional style does not detract from current building aesthetics. The OFM LED provides years of maintenance-free general illumination for outdoor applications. Ideal for entrances, parking areas, covered walkways and loading docks.

#### CONSTRUCTION

Rugged cast-aluminum, corrosion-resistant housing with bronze polyester powder paint for lasting durability. Castings are sealed with a one-piece gasket to inhibit the entrance of external contaminants. Rated for outdoor installations, -40°C minimum ambient. Acrylic lens is designed for uniform light distribution. OFM LED is IP65 rated.

#### ELECTRICAL

High-powered LED provides 4,200 lumens. Includes an MVOLT (120-277V) driver. LEDs maintain 72% of light output at 100,000 hours of service life (L84/100,000 hours).

#### INSTALLATION

Mounts to a recessed junction box or surface mount with three conduit entry points. Can be pendant mounted with ¾ NPT pendant stem provided by others.

#### LISTINGS

UL Listed to U.S. and Canadian safety standards for wet locations. Tested in accordance with IESNA LM-79 and LM-80 standards. DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

#### WARRANTY

Five-year limited warranty. Complete warranty terms located at: [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx).

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.




## Photometric Diagrams


Full photometric data report available within 2 weeks from request. Contact Acuity tech support.

### LEGEND

- 0.1 fc
- 0.2 fc
- 0.5 fc
- 1.0 fc

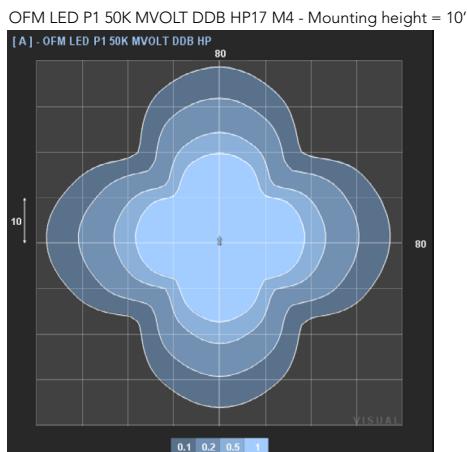

## Lighting Facts Labels

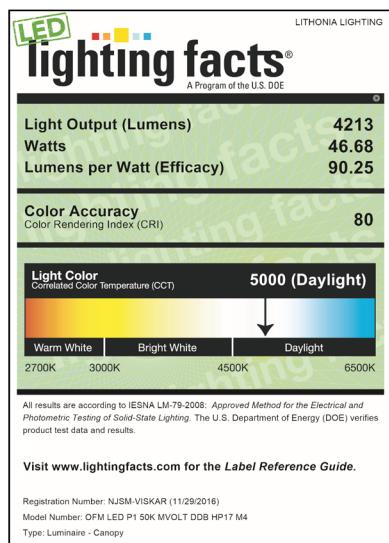



# OFM LED

## LED Canopy/Ceiling Luminaire





### Specifications

**Width:** 10"  
(25.4 cm)

**Height:** 4"  
(10.16 cm)

**Depth:** 10"  
(22.3 cm)

**Weight:** 4.25 lbs.  
(1.93 kg)

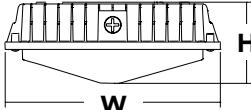

Catalog  
Number

Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.

### Introduction

The OFM LED luminaire is economical and energy efficient, capable of replacing a 150W metal halide luminaire while saving 70% in energy costs. With an expected service life of more than 10 years, the OFM LED eliminates frequent lamp and ballast replacements associated with traditional technologies.

### Ordering Information

**EXAMPLE:** OFM LED P1 50K MVOLT DDB HP17

OFM LED				
Series	Performance Package	Color Temperature <sup>1</sup>	Voltage	Finish
OFM LED	P1 4,200 lumens	50K 5000K	MVOLT <sup>2</sup>	DDB HP17 Dark bronze

#### NOTES

1. Correlated color temperature (CCT) shown is nominal per ANSI C78.377-2008.
2. MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).

### FEATURES & SPECIFICATIONS

#### INTENDED USE

47 watt LED ceiling light delivers 4,200 lumens for an energy-efficient replacement of 150W MH canopy/ceiling lights. Traditional style does not detract from current building aesthetics. The OFM LED provides years of maintenance-free general illumination for outdoor applications. Ideal for entrances, parking areas, covered walkways and loading docks.

#### CONSTRUCTION

Rugged cast-aluminum, corrosion-resistant housing with bronze polyester powder paint for lasting durability. Castings are sealed with a one-piece gasket to inhibit the entrance of external contaminants. Rated for outdoor installations, -40°C minimum ambient. Acrylic lens is designed for uniform light distribution. OFM LED is IP65 rated.

#### ELECTRICAL

High-powered LED provides 4,200 lumens. Includes an MVOLT (120-277V) driver. LEDs maintain 72% of light output at 100,000 hours of service life (L84/100,000 hours).

#### INSTALLATION

Mounts to a recessed junction box or surface mount with three conduit entry points. Can be pendant mounted with ¾ NPT pendant stem provided by others.

#### LISTINGS

UL Listed to U.S. and Canadian safety standards for wet locations. Tested in accordance with IESNA LM-79 and LM-80 standards. DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

#### WARRANTY

Five-year limited warranty. Complete warranty terms located at: [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx).

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.




## Photometric Diagrams

Full photometric data report available within 2 weeks from request. Contact Acuity tech support.

### LEGEND

- 0.1 fc
- 0.2 fc
- 0.5 fc
- 1.0 fc

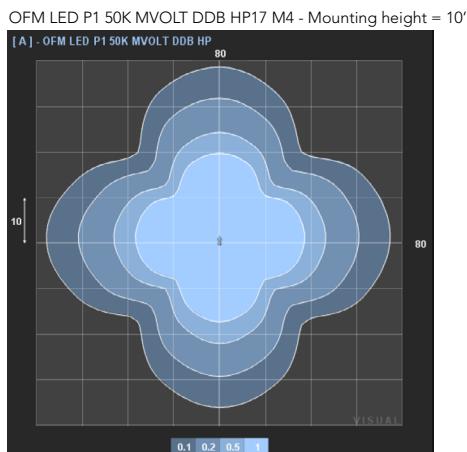

## Lighting Facts Labels

