Catalog Number	
Notes	
Type	

Contractor Select™

OLWP

LED Wall Pack



Customize the color temperature and effortlessly automate your wall pack for dusk-to-dawn operation with the OLWP Wall Pack. Featuring switchable CCT (3000K/4000K/5000K) and a selectable photocell, the OLWP Wall Pack is designed to deliver years of maintenance-free general illumination for residential outdoor applications such as driveways, entryways, patios, and other outdoor areas that require consistent and reliable lighting performance.

FEATURES:

- Switchable CCT (30/40/50K)
- Selectable ON/OFF photocell for dusk-to-dawn or switched operation
- Cast-aluminum construction for durability
- Impact resistant polycarbonate diffuser

Catalog Number	UPC	Description	Lumens	Input Watts	CCT	CRI	Voltage	Dusk-to-Dawn Operation	Finish
OLWP LED SWW2 120 PE DDB	00197589211252	OLWP LED Wall Pack	1,600	18.5	3000/4000/5000K	80	120	Included Standard, Selectable On*/Off	Dark Bronze

Specifications

INTENDED USE:
The OLWP provides years of maintenance-free general illumination for commercial or residential outdoor applications such as driveways, patios, loading areas and warehouses.

CONSTRUCTION:
Rugged cast-aluminum, corrosion-resistant rear housing. Impact resistant polycarbonate front cover/diffuser resists fading and cracking. Driver operates at 120V. Operating temperature -40°C to 40°C.

OPTICS:
High-performance LEDs maintain 70% of light output at 50,000 hours of service. (LED lifespan based on IESNA LM-80-08 results and calculated per IESNA TM-21-11 methodology.). Lenses are engineered for superior lighting distribution, uniformity and fixture spacing. See Lighting Performance Table for specific fixture performance.

INSTALLATION:
Designed for wall mounting more than 4' above the ground. Mounts to a recessed junction box (by others).

LISTINGS:
UL Listed to U.S. and Canadian safety standards for wet locations.


WARRANTY:
5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

Dimensions

Specifications

Width:	5.35″ *(13.6 cm)*
Height:	10.5″ *(26.6 cm)*
Depth:	3″ *(7.7 cm)*
Weight:	1.54 lbs *(0.70 kg)*

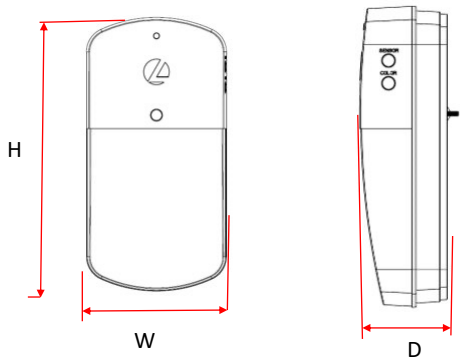

© 2013-2023 Acuity Brands Lighting, Inc. All rights reserved. Rev. 12/14/23

Catalog Number	
Notes	
Type	

Contractor Select™

OLWP

LED Wall Pack



Customize the color temperature and effortlessly automate your wall pack for dusk-to-dawn operation with the OLWP Wall Pack. Featuring switchable CCT (3000K/4000K/5000K) and a selectable photocell, the OLWP Wall Pack is designed to deliver years of maintenance-free general illumination for residential outdoor applications such as driveways, entryways, patios, and other outdoor areas that require consistent and reliable lighting performance.

FEATURES:

- Switchable CCT (30/40/50K)
- Selectable ON/OFF photocell for dusk-to-dawn or switched operation
- Cast-aluminum construction for durability
- Impact resistant polycarbonate diffuser

Catalog Number	UPC	Description	Lumens	Input Watts	CCT	CRI	Voltage	Dusk-to-Dawn Operation	Finish
OLWP LED SWW2 120 PE DDB	00197589211252	OLWP LED Wall Pack	1,600	18.5	3000/4000/5000K	80	120	Included Standard, Selectable On*/Off	Dark Bronze

Specifications

INTENDED USE:
The OLWP provides years of maintenance-free general illumination for commercial or residential outdoor applications such as driveways, patios, loading areas and warehouses.

CONSTRUCTION:
Rugged cast-aluminum, corrosion-resistant rear housing. Impact resistant polycarbonate front cover/diffuser resists fading and cracking. Driver operates at 120V. Operating temperature -40°C to 40°C.

OPTICS:
High-performance LEDs maintain 70% of light output at 50,000 hours of service. (LED lifespan based on IESNA LM-80-08 results and calculated per IESNA TM-21-11 methodology.). Lenses are engineered for superior lighting distribution, uniformity and fixture spacing. See Lighting Performance Table for specific fixture performance.

INSTALLATION:
Designed for wall mounting more than 4' above the ground. Mounts to a recessed junction box (by others).

LISTINGS:
UL Listed to U.S. and Canadian safety standards for wet locations.


WARRANTY:
5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

Dimensions

Specifications

Width:	5.35″ *(13.6 cm)*
Height:	10.5″ *(26.6 cm)*
Depth:	3″ *(7.7 cm)*
Weight:	1.54 lbs *(0.70 kg)*

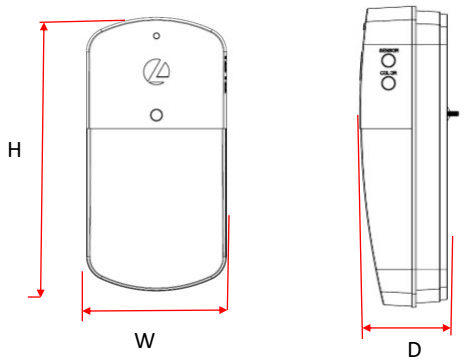

© 2013-2023 Acuity Brands Lighting, Inc. All rights reserved. Rev. 12/14/23