
## **UTILITY & VALVE BOXES**

- Etched polypropylene face
- Face anchored in concrete
- Ultra-violet inhibitor
- Exceeds ASTM-D1693 Standards for Environmental Stress Cracking Resistance

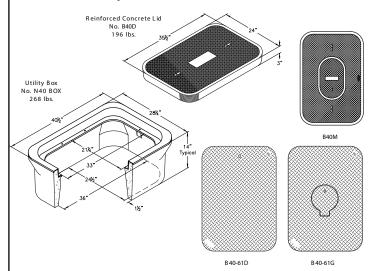

A high density reinforced concrete box with non-settling shoulders positioned to maintain grade and facilitate back filling. Approximate dimensions and weight shown.

| Oldcastle<br>Ordering Code | Item      | Approx.<br>Shipping<br>Weight | Description   |
|----------------------------|-----------|-------------------------------|---|
| N40BOX                     | BOX       | 268 lbs.                      | N65 Utility Box (15" X 26-1/2 ") - 8 per pallet                   |
| B40D                       | LID       | 196 lbs.                      | Reinforced Concrete Lid - Non Bolt Down                           |
| B40M                       | LID       | 168 lbs.                      | Reinforced Concrete with 7" x 13-1/2" Concrete Reading Lid        |
| B40-61D                    | COVER     | 82 lbs.                       | Steel Checker Plate Cover   |
| B40-61G                    | COVER     | 84 lbs.                       | Steel Checker Plate Cover with 8" Round, Self-Closing Reading Lid |
| B40-61P                    | COVER     | 88 lbs.                       | Steel checker plate cover with probe hole option                  |
| B40X10                     | EXTENSION | 215 lbs.                      | 12" Reinforced Concrete Box Extension - 8 per pallet              |
| B40SL                      | SLAB      | 201 lbs.                      | Reinforced Concrete Slab (20" x 34")                              |

Galvanizing available on all steel covers. Probe holes : badger, flexnet, orion, neptune




none: (800) 735-5566 Fax: (800) 486 68 Copyright© 2017 Oldcastle, Inc.

| N40 BOX                   |  |  |  |  |
|---------------------------|--|--|--|--|
| FILE NAME: B40_ISO        |  |  |  |  |
| ISSUE DATE: January, 2011 |  |  |  |  |
| OldcastleEnclosures.com   |  |  |  |  |

N40 UTILITY BOX 24-1/2" x 36" Christy'

## **ELECTRICAL & TELEPHONE BOXES**

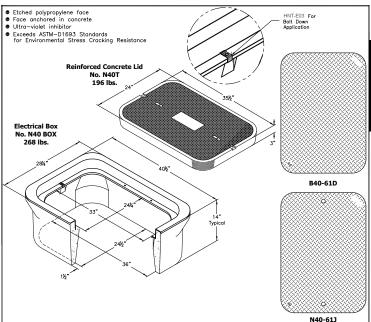


A high density reinforced concrete box with non-settling shoulders positioned to maintain grade and facilitate back filling. Approximate dimensions and weight shown.

| Oldcastle<br>Ordering<br>Code             | Item      | Approx.<br>Shipping<br>Weight | Description  |
|---|-----------|-------------------------------|--|
| N40BOX                                    | BOX       | 268 lbs.                      | N40 Electrical Box (24½" x 36") w/ Bolt Down Provisions- 3 per<br>pallet           |
| N40T                                      | LID       | 196 lbs.                      | Reinforced Concrete Lid (Order N98 - Set of 2 - Bolt Down Kit<br>Separately)       |
| B40-61D                                   | COVER     | 82 lbs.                       | Steel Checker Plate  |
| N40-61J                                   | COVER     | 84 lbs.                       | Steel Checker Plate Bolt Down (Order N98 - Set of 2 - Bolt Down<br>Kit Separately) |
| N40X10                                    | EXTENSION | 215 lbs.                      | 10" Reinforced Concrete - 4 per pallet   |
| B40SL                                     | SLAB      | 194 lbs.                      | Reinforced concrete (16" x 28")  |
| Galvanizing available on all steel covers |           |                               |  |

| ·   |                           |                    |  |
|---|---------------------------|--------------------|--|
| Oldcastle® Enclosure Solutions            | N40 BOX                   | N40 ELECTRICAL BOX |  |
| Old Castle Linciosure Solutions           | FILE NAME: N40_ISO        | 24-1/2" x 36"      |  |
| Phone: (800) 735-5566 Fax: (800) 486 6806 | ISSUE DATE: January, 2011 | CHRISTY'           |  |
| Convright@ 2017 Oldcastle, Inc.           | OldcastleEnclosures.com   |                    |  |

## **UTILITY & VALVE BOXES**

- Etched polypropylene face
- Face anchored in concrete
- Ultra-violet inhibitor
- Exceeds ASTM-D1693 Standards for Environmental Stress Cracking Resistance

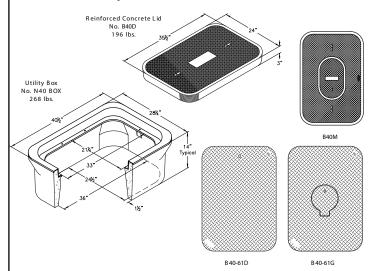

A high density reinforced concrete box with non-settling shoulders positioned to maintain grade and facilitate back filling. Approximate dimensions and weight shown.

| Oldcastle<br>Ordering Code | Item      | Approx.<br>Shipping<br>Weight | Description   |
|----------------------------|-----------|-------------------------------|---|
| N40BOX                     | BOX       | 268 lbs.                      | N65 Utility Box (15" X 26-1/2 ") - 8 per pallet                   |
| B40D                       | LID       | 196 lbs.                      | Reinforced Concrete Lid - Non Bolt Down                           |
| B40M                       | LID       | 168 lbs.                      | Reinforced Concrete with 7" x 13-1/2" Concrete Reading Lid        |
| B40-61D                    | COVER     | 82 lbs.                       | Steel Checker Plate Cover   |
| B40-61G                    | COVER     | 84 lbs.                       | Steel Checker Plate Cover with 8" Round, Self-Closing Reading Lid |
| B40-61P                    | COVER     | 88 lbs.                       | Steel checker plate cover with probe hole option                  |
| B40X10                     | EXTENSION | 215 lbs.                      | 12" Reinforced Concrete Box Extension - 8 per pallet              |
| B40SL                      | SLAB      | 201 lbs.                      | Reinforced Concrete Slab (20" x 34")                              |

Galvanizing available on all steel covers. Probe holes : badger, flexnet, orion, neptune




none: (800) 735-5566 Fax: (800) 486 68 Copyright© 2017 Oldcastle, Inc.

| N40 BOX                   |  |  |  |  |
|---------------------------|--|--|--|--|
| FILE NAME: B40_ISO        |  |  |  |  |
| ISSUE DATE: January, 2011 |  |  |  |  |
| OldcastleEnclosures.com   |  |  |  |  |

N40 UTILITY BOX 24-1/2" x 36" Christy'

## **ELECTRICAL & TELEPHONE BOXES**

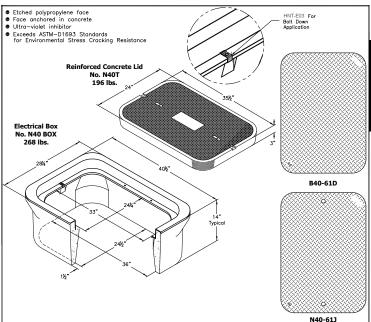

A high density reinforced concrete box with non-settling shoulders positioned to maintain grade and facilitate back filling. Approximate dimensions and weight shown.

| Oldcastle<br>Ordering<br>Code             | Item      | Approx.<br>Shipping<br>Weight | Description  |
|---|-----------|-------------------------------|--|
| N40BOX                                    | BOX       | 268 lbs.                      | N40 Electrical Box (24½" x 36") w/ Bolt Down Provisions- 3 per<br>pallet           |
| N40T                                      | LID       | 196 lbs.                      | Reinforced Concrete Lid (Order N98 - Set of 2 - Bolt Down Kit<br>Separately)       |
| B40-61D                                   | COVER     | 82 lbs.                       | Steel Checker Plate  |
| N40-61J                                   | COVER     | 84 lbs.                       | Steel Checker Plate Bolt Down (Order N98 - Set of 2 - Bolt Down<br>Kit Separately) |
| N40X10                                    | EXTENSION | 215 lbs.                      | 10" Reinforced Concrete - 4 per pallet   |
| B40SL                                     | SLAB      | 194 lbs.                      | Reinforced concrete (16" x 28")  |
| Galvanizing available on all steel covers |           |                               |  |

| ·   |                           |                    |  |
|---|---------------------------|--------------------|--|
| Oldcastle® Enclosure Solutions            | N40 BOX                   | N40 ELECTRICAL BOX |  |
| Old Castle Linciosure Solutions           | FILE NAME: N40_ISO        | 24-1/2" x 36"      |  |
| Phone: (800) 735-5566 Fax: (800) 486 6806 | ISSUE DATE: January, 2011 | CHRISTY'           |  |
| Convright@ 2017 Oldcastle, Inc.           | OldcastleEnclosures.com   |                    |  |