



Polycarbonate Square Emergency Lights Specification

Features

- Completely self-contained
- Fully automatic operation
- Compact, low-profile design in neutral finish
- Universal mounting plate with "EZ" Quick Connect for rapid, labor-saving installation
- Push-to-test switch
- Environmentally-coated, solid state charger
- Automatic, low-voltage disconnect (LVD)
- Universal transformer for 120 or 277 VAC
- Listed for damp location
- Injection-molded, V-O flame retardant, high-impact thermoplastic housing
- Charger rate/power on LED indicator light
- Operating temperature range of 20°C to 50°C
- Two 5.4W 6 volt lamps provide illumination
- 20765 can run 11W of remote heads
- UL 924 Listed
- Follows NFPA 101, NEC, and OSHA standards
- 20760 and 20762 are CUL listed




Accessories



Item #	Description
--------	-------------

207LWG	Large Wire Guard for Exit Sign
207PS	Polycarbonate Shield for Exit Sign
207R1	Single White Remote Head 6W 6V
207R13	Single Grey Remote Weatherproof Head 8W 6V
207R15	Single Square Remote Head 9W 12V
207R7	Single Black Remote Head 5W 6V
207R8	Double Black Remote Head 2 X 5W 6V
20734	Replacement Battery 6V 4.5Ah
20739	Replacement Battery 6V 10Ah
939	Replacement Lamp 6V 0.9A T5 Wedge

Dimensions

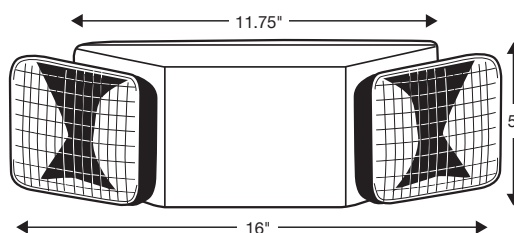

6V, 5.4W Tungsten Wedge Base Lamp (ANSI 939)

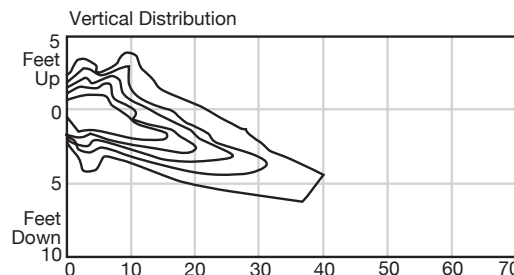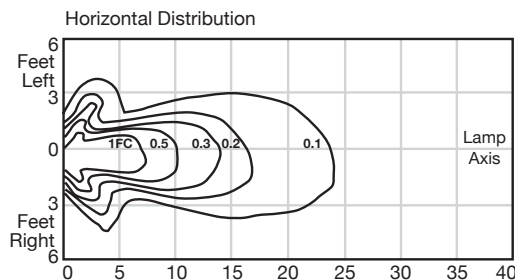

Ordering Information

Catalog Model #	Description	Watts	M.O.L. (inches)	M.O.L. (inches)	M.O.L. (inches)
20760	Emergency Light 2 x 5.4W Square Heads WH Finish	5.4	5"	16"	3.5"
20762	Emergency Light 2 x 5.4W Square Heads BLK Finish	5.4	5"	16"	3.5"
20765	Emergency Light 2 x 5.4W Square Heads WH Finish w/Remote Capability	5.4	5"	16"	3.5"



5 YEAR WARRANTY
ELECTRONICS AND HOUSING

1 YEAR WARRANTY
LEAD ACID BATTERY



Polycarbonate Square Emergency Lights Specification

Features


- Completely self-contained
- Fully automatic operation
- Compact, low-profile design in neutral finish
- Universal mounting plate with "EZ" Quick Connect for rapid, labor-saving installation
- Push-to-test switch
- Environmentally-coated, solid state charger
- Automatic, low-voltage disconnect (LVD)
- Universal transformer for 120 or 277 VAC
- Listed for damp location
- Injection-molded, V-O flame retardant, high-impact thermoplastic housing
- Charger rate/power on LED indicator light
- Operating temperature range of 20°C to 50°C
- Two 5.4W 6 volt lamps provide illumination
- 20765 can run 11W of remote heads
- UL 924 Listed
- Follows NFPA 101, NEC, and OSHA standards
- 20760 and 20762 are CUL listed





Accessories

Item #	Description
207LWG	Large Wire Guard for Exit Sign
207PS	Polycarbonate Shield for Exit Sign
207R1	Single White Remote Head 6W 6V
207R13	Single Grey Remote Weatherproof Head 8W 6V
207R15	Single Square Remote Head 9W 12V
207R7	Single Black Remote Head 5W 6V
207R8	Double Black Remote Head 2 X 5W 6V
20734	Replacement Battery 6V 4.5Ah
20739	Replacement Battery 6V 10Ah
939	Replacement Lamp 6V 0.9A T5 Wedge

Dimensions

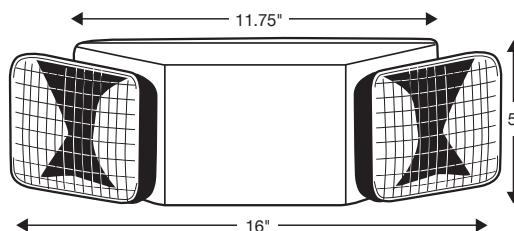

6V, 5.4W Tungsten Wedge Base Lamp (ANSI 939)

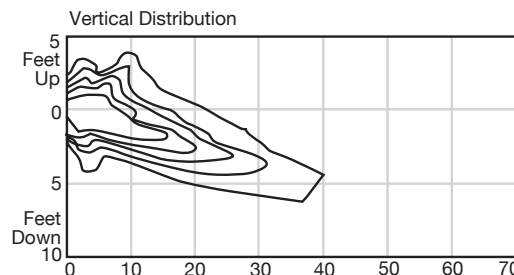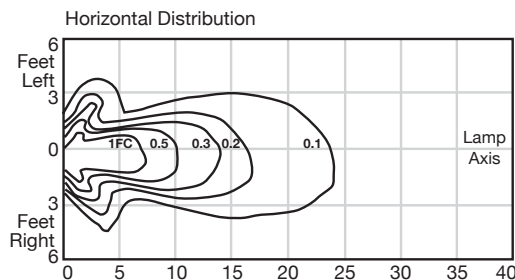

Ordering Information

Catalog Model #	Description	Watts	M.O.L. (inches)	M.O.L. (inches)	M.O.L. (inches)
20760	Emergency Light 2 x 5.4W Square Heads WH Finish	5.4	5"	16"	3.5"
20762	Emergency Light 2 x 5.4W Square Heads BLK Finish	5.4	5"	16"	3.5"
20765	Emergency Light 2 x 5.4W Square Heads WH Finish w/Remote Capability	5.4	5"	16"	3.5"



5 YEAR WARRANTY
ELECTRONICS AND HOUSING

1 YEAR WARRANTY
LEAD ACID BATTERY