legrand®


Pass & Seymour

# Decorator Devices
# Construction Grade Receptacles
# 15 & 20A, 125V

**26252, 26352**

## *Tough decorator-style receptacles offered in a leaded version.*

Tough nylon faces provide superior impact resistance. And the heavy-gauge steel straps are locked into receptacle bodies to beat pull-outs. These dependable performers feature extra-durable, single-piece, triple-wipe brass power contacts, too. Screw-pressure-plate back wiring and auto-ground speeds installation.

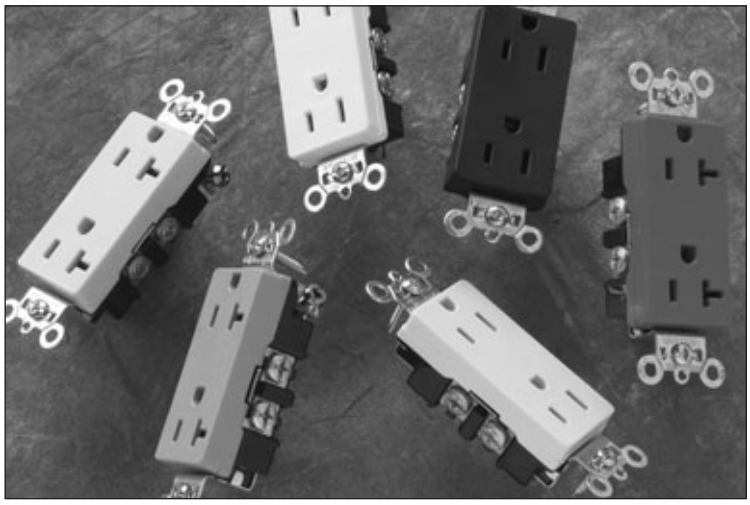

## Features & Benefits

**.032 inch thick, brass, triple-wipe power contacts** for lasting retention.

**Auto-ground** eliminates the necessity to terminate grounding conductor to device.

**Easily accessed break-off, line-contact connecting tab** for fast, easy split-circuit wiring.

**Two drive screws anchor strap** to back body and face where abrupt removal torque is strongest.



**26252-W**

**Tri-drive steel terminal screws. Internal screw-pressure-plate back and side wire capability.** Two back wire holes for more wiring flexibility.

**Corrosion-resistant, plated steel strap** locked in to face and back body to resist pulling away from face/body assembly.

## Field Uses/Vertical Markets

- Education
- Institutional
- Hospitality/Lodging
- Retail
- Multiple Dwelling
- Office

legrand®
Pass & Seymour

# Decorator Devices
# Construction Grade Receptacles
## 15 & 20A, 125V

## Ordering Information

| Catalog Number | Rating A. | V. | Color | NEMA Config. No. |
|---|---|---|---|---|
| **Duplex Receptacles** Back & Side Wire | | | | |
| **26252-I** | 15 | 125 | Ivory | 5-15R |
| **26252-W** | 15 | 125 | White | 5-15R |
| **26252** | 15 | 125 | Brown | 5-15R |
| **26252-GRY** | 15 | 125 | Gray | 5-15R |
| **26252-BK** | 15 | 125 | Black | 5-15R |
| **26252-RED** | 15 | 125 | Red | 5-15R |
| **26252-LA** | 15 | 125 | Light Almond | 5-15R |
| **26352-I** | 20 | 125 | Ivory | 5-20R |
| **26352-W** | 20 | 125 | White | 5-20R |
| **26352** | 20 | 125 | Brown | 5-20R |
| **26352-GRY** | 20 | 125 | Gray | 5-20R |
| **26352-BK** | 20 | 125 | Black | 5-20R |
| **26352-RED** | 20 | 125 | Red | 5-20R |
| **26352-LA** | 20 | 125 | Light Almond | 5-20R |



NEMA 5-15R



NEMA 5-20R

For more information on these and other P&S products refer to our Product Guide or visit our web site.


# Decorator Devices
# Construction Grade Receptacles
## 15 & 20A, 125V

legrand®
Pass & Seymour

## Technical Specifications

### 3rd Party Compliance

UL Listed, File Number E140596, Standard UL498.
Federal Specification WC596.
CSA/CUL approved, File Number LR16063, Standard CSA-C22.2 No. 42.

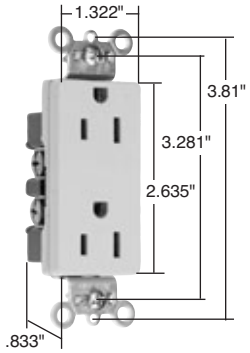


**Dimensions for 15 & 20 Amp**

### Performance

| | |
|---|---|
| **Electrical** | |
| Dielectric Voltage | Withstands 2000V minimum |
| Maximum Working Voltage | 250V |
| Current Interrupting | Certified for current interrupting at full-rated current |
| Temperature Rise | Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current |
| **Mechanical** | |
| Terminal Identification | Terminal Identification in accordance with UL498 (Brass, White, Green) |
| Terminal Accommodation | #14 AWG – #10 AWG copper conductor only |
| Product Identification | Ratings are a permanent part of the device |
| **Environmental** | |
| Flammability | UL94 V2 |
| Operating Temperature | Maximum continuous +60°C, minimum -40°C (without impact) |

### Materials

| | | | |
|---|---|---|---|
| Face | Nylon | Terminal Screws | #8 Tri-Drive Steel (Neutral = Nickel-Plated Steel) |
| Back Body | PVC | | |
| Line Contacts | .032 688 Brass | | |
| Mounting Strap | .042 Zinc-Plated Steel | Ground Screw | #8 Hex Tri-Drive Steel |
| Ground Contacts | .040 260 Brass | Assembly Drive Screw | Zinc-Plated Steel |
| Pressure Plate | .080 Steel | Auto-Ground Clip | Stainless Steel |
| | | Mounting Screws | Tri-Drive Steel |

### Warranty


1 Year

## Complimentary Devices & Accessories




### DECORATOR DEVICES

- Construction Grade Switches
- Construction Grade Illuminated & Pilot Lighted Switches
- Commercial Grade Receptacles
- Construction Grade Hallway Lights

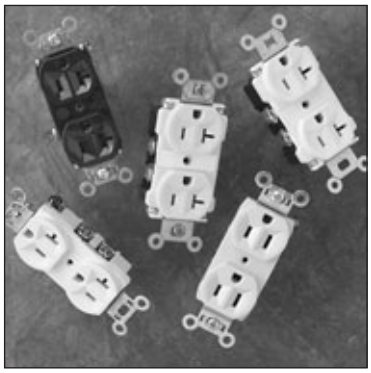

### STRAIGHT BLADE RECEPTACLES

- Extra Heavy-Duty
- Heavy-Duty
- Construction Grade
- Commercial Grade

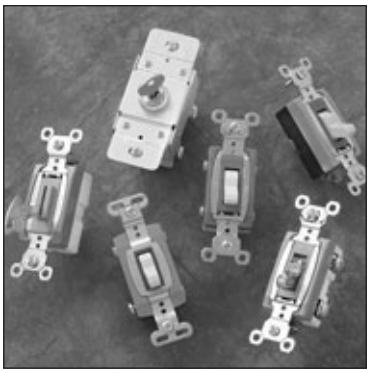

### SWITCHES

- Heavy-Duty Toggle
- Heavy-Duty Lighted Toggle
- Heavy-Duty Security
- Heavy-Duty Locking
- Construction Grade Toggle
- Commercial Grade Toggle



### GFCIs

- Construction Grade with Auto-Ground
- Construction Grade
- Construction Grade Dead Front



### WALL PLATES

- TradeMaster® Thermoplastic Nylon
- Stainless Steel
- Brass
- Aluminum
- Dustproof Stainless Steel Covers

## Also available...

- Light Almond Devices
- Hospital Grade Devices
- PlugTail™ Devices
- TVSS & Isolated Ground Devices
- Ground Continuity Monitoring (GCM)
- Straight Blade Plugs & Connectors
- Turnlok® Locking Devices
- Weatherproof Boxes & Covers
- IEC 309 Industrial Products
- Flexcor® Wire Mesh Grips
- Configurable Solutions

legrand®

**Legrand/Pass & Seymour**
P.O. Box 4822
Syracuse, NY 13221-4822
800-223-4185

**North America Headquarters**
60 Woodlawn Street
West Hartford, CT 06110
Phone: 1.877.BY.LEGRAND (295.3472)
Fax: 1.860.232.2062
www.legrand.us

**Legrand Canada**
570 Applewood Crescent
Vaughan, ON, L4K 4B4
Phone: 905.738.9195
Fax: 905.738.9721
www.legrand.ca

**SF903R1 — Updated January 2004 — For latest specs visit www.legrand.us/passandseymour**

© 2010, Legrand/Pass & Seymour GG/INT

legrand®


Pass & Seymour

# Decorator Devices
# Construction Grade Receptacles
# 15 & 20A, 125V

**26252, 26352**

## *Tough decorator-style receptacles offered in a leaded version.*

Tough nylon faces provide superior impact resistance. And the heavy-gauge steel straps are locked into receptacle bodies to beat pull-outs. These dependable performers feature extra-durable, single-piece, triple-wipe brass power contacts, too. Screw-pressure-plate back wiring and auto-ground speeds installation.

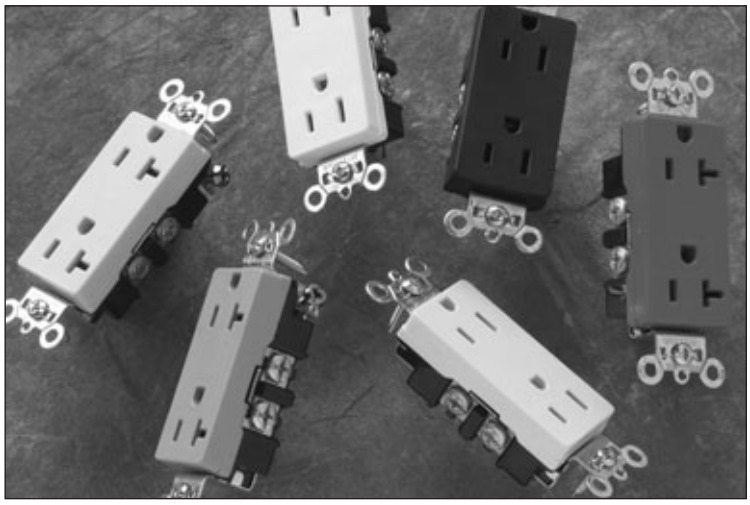

## Features & Benefits

**.032 inch thick, brass, triple-wipe power contacts** for lasting retention.

**Auto-ground** eliminates the necessity to terminate grounding conductor to device.

**Easily accessed break-off, line-contact connecting tab** for fast, easy split-circuit wiring.

**Two drive screws anchor strap** to back body and face where abrupt removal torque is strongest.



**26252-W**

**Tri-drive steel terminal screws. Internal screw-pressure-plate back and side wire capability.** Two back wire holes for more wiring flexibility.

**Corrosion-resistant, plated steel strap** locked in to face and back body to resist pulling away from face/body assembly.

## Field Uses/Vertical Markets

- Education
- Institutional
- Hospitality/Lodging
- Retail
- Multiple Dwelling
- Office

legrand®
Pass & Seymour

# Decorator Devices
# Construction Grade Receptacles
## 15 & 20A, 125V

## Ordering Information

| Catalog Number | Rating A. | V. | Color | NEMA Config. No. |
|---|---|---|---|---|
| **Duplex Receptacles** Back & Side Wire | | | | |
| **26252-I** | 15 | 125 | Ivory | 5-15R |
| **26252-W** | 15 | 125 | White | 5-15R |
| **26252** | 15 | 125 | Brown | 5-15R |
| **26252-GRY** | 15 | 125 | Gray | 5-15R |
| **26252-BK** | 15 | 125 | Black | 5-15R |
| **26252-RED** | 15 | 125 | Red | 5-15R |
| **26252-LA** | 15 | 125 | Light Almond | 5-15R |
| **26352-I** | 20 | 125 | Ivory | 5-20R |
| **26352-W** | 20 | 125 | White | 5-20R |
| **26352** | 20 | 125 | Brown | 5-20R |
| **26352-GRY** | 20 | 125 | Gray | 5-20R |
| **26352-BK** | 20 | 125 | Black | 5-20R |
| **26352-RED** | 20 | 125 | Red | 5-20R |
| **26352-LA** | 20 | 125 | Light Almond | 5-20R |



NEMA 5-15R



NEMA 5-20R

For more information on these and other P&S products refer to our Product Guide or visit our web site.


# Decorator Devices
# Construction Grade Receptacles
## 15 & 20A, 125V

legrand®
Pass & Seymour

## Technical Specifications

### 3rd Party Compliance

UL Listed, File Number E140596, Standard UL498.
Federal Specification WC596.
CSA/CUL approved, File Number LR16063, Standard CSA-C22.2 No. 42.

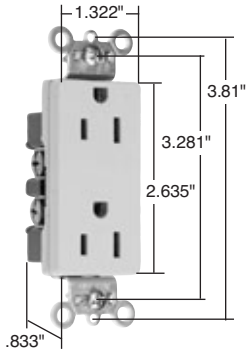


**Dimensions for 15 & 20 Amp**

### Performance

| | |
|---|---|
| **Electrical** | |
| Dielectric Voltage | Withstands 2000V minimum |
| Maximum Working Voltage | 250V |
| Current Interrupting | Certified for current interrupting at full-rated current |
| Temperature Rise | Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current |
| **Mechanical** | |
| Terminal Identification | Terminal Identification in accordance with UL498 (Brass, White, Green) |
| Terminal Accommodation | #14 AWG – #10 AWG copper conductor only |
| Product Identification | Ratings are a permanent part of the device |
| **Environmental** | |
| Flammability | UL94 V2 |
| Operating Temperature | Maximum continuous +60°C, minimum -40°C (without impact) |

### Materials

| | | | |
|---|---|---|---|
| Face | Nylon | Terminal Screws | #8 Tri-Drive Steel (Neutral = Nickel-Plated Steel) |
| Back Body | PVC | | |
| Line Contacts | .032 688 Brass | | |
| Mounting Strap | .042 Zinc-Plated Steel | Ground Screw | #8 Hex Tri-Drive Steel |
| Ground Contacts | .040 260 Brass | Assembly Drive Screw | Zinc-Plated Steel |
| Pressure Plate | .080 Steel | Auto-Ground Clip | Stainless Steel |
| | | Mounting Screws | Tri-Drive Steel |

### Warranty


1 Year

## Complimentary Devices & Accessories




### DECORATOR DEVICES

- Construction Grade Switches
- Construction Grade Illuminated & Pilot Lighted Switches
- Commercial Grade Receptacles
- Construction Grade Hallway Lights

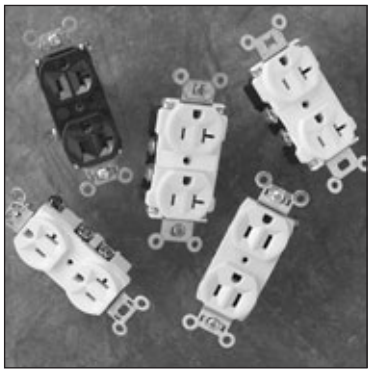

### STRAIGHT BLADE RECEPTACLES

- Extra Heavy-Duty
- Heavy-Duty
- Construction Grade
- Commercial Grade

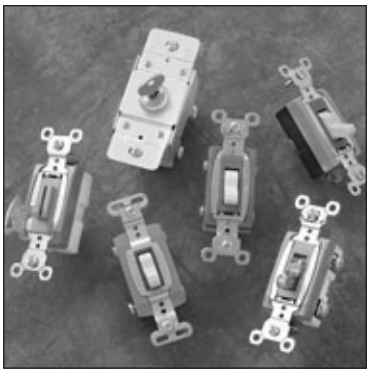

### SWITCHES

- Heavy-Duty Toggle
- Heavy-Duty Lighted Toggle
- Heavy-Duty Security
- Heavy-Duty Locking
- Construction Grade Toggle
- Commercial Grade Toggle



### GFCIs

- Construction Grade with Auto-Ground
- Construction Grade
- Construction Grade Dead Front



### WALL PLATES

- TradeMaster® Thermoplastic Nylon
- Stainless Steel
- Brass
- Aluminum
- Dustproof Stainless Steel Covers

## Also available...

- Light Almond Devices
- Hospital Grade Devices
- PlugTail™ Devices
- TVSS & Isolated Ground Devices
- Ground Continuity Monitoring (GCM)
- Straight Blade Plugs & Connectors
- Turnlok® Locking Devices
- Weatherproof Boxes & Covers
- IEC 309 Industrial Products
- Flexcor® Wire Mesh Grips
- Configurable Solutions

legrand®

**Legrand/Pass & Seymour**
P.O. Box 4822
Syracuse, NY 13221-4822
800-223-4185

**North America Headquarters**
60 Woodlawn Street
West Hartford, CT 06110
Phone: 1.877.BY.LEGRAND (295.3472)
Fax: 1.860.232.2062
www.legrand.us

**Legrand Canada**
570 Applewood Crescent
Vaughan, ON, L4K 4B4
Phone: 905.738.9195
Fax: 905.738.9721
www.legrand.ca

**SF903R1 — Updated January 2004 — For latest specs visit www.legrand.us/passandseymour**

© 2010, Legrand/Pass & Seymour GG/INT