



GE
Lighting

25450 - 44

GE T3.25 (T3 1/4) - Low Voltage

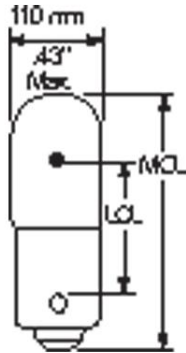


Photo
Not Available

GENERAL CHARACTERISTICS

Lamp Type	Miniature - T & TL Shape
Bulb	T3.25 (T3 1/4)
Base	Miniature Bayonet (Ba9s)
Filament	C-2R
Rated Life	3000.0 hrs
Atmosphere	Vacuum
Primary Application	Low Voltage

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	11.0
Nominal Initial Lumens per Watt	5
Mean Spherical Candlepower (MSCP)	0.9

ELECTRICAL CHARACTERISTICS

Wattage	2.0
Voltage	6.3

DIMENSIONS

Maximum Overall Length (MOL)	1.1900 in(30.2 mm)
Bulb Diameter (DIA)	0.406 in(10.3 mm)
Light Center Length (LCL)	0.780 in(19.8 mm)

PRODUCT INFORMATION

Product Code	25450
Description	44
ANSI Code	44
Standard Package	Case
Standard Package GTIN	20043168254506
Standard Package Quantity	50
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	50
UPC	043168254502



GE
Lighting

25450 - 44

GE T3.25 (T3 1/4) - Low Voltage

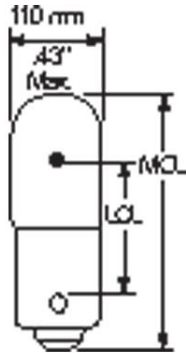


Photo
Not Available

GENERAL CHARACTERISTICS

Lamp Type	Miniature - T & TL Shape
Bulb	T3.25 (T3 1/4)
Base	Miniature Bayonet (Ba9s)
Filament	C-2R
Rated Life	3000.0 hrs
Atmosphere	Vacuum
Primary Application	Low Voltage

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	11.0
Nominal Initial Lumens per Watt	5
Mean Spherical Candlepower (MSCP)	0.9

ELECTRICAL CHARACTERISTICS

Wattage	2.0
Voltage	6.3

DIMENSIONS

Maximum Overall Length (MOL)	1.1900 in(30.2 mm)
Bulb Diameter (DIA)	0.406 in(10.3 mm)
Light Center Length (LCL)	0.780 in(19.8 mm)

PRODUCT INFORMATION

Product Code	25450
Description	44
ANSI Code	44
Standard Package	Case
Standard Package GTIN	20043168254506
Standard Package Quantity	50
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	50
UPC	043168254502