

DESCRIPTION

The Vaportite LED Series is an energy efficient industrial Vaportite fixture that features rugged and durable construction. The Vaportite LED incorporates a full metal fixture liner inside a reinforced fiberglass housing with a high impact diffuser. This Vaportite series is suitable for interior and exterior applications and can be surface or chain mounted.

The Vaportite LED Series has been designed for maximum operation in commercial institutional and industrial environments and can operate in a wide range of temperatures (-20°C to 25°C) and is ideal for cold storage environments.

SPECIFICATION FEATURES

Construction

Fiberglass housing is reinforced polyester and self-extinguishing (ASTM-D635-74) plastic of a permanent pearl gray color. A watertite hub for 1/2" conduit entry is provided at each end of housing (standard) for continuous feed. Polyurethane gasketing is formed in the housing providing a continuous seamless seal for the diffuser. Four sturdy cam latches clamp diffuser tightly for a positive seal between housing, gasketing and diffuser. Electrical components and fixtures are UL/ cUL listed for Wet Locations.

Electrical

Long-Life LED system coupled with electrical driver to deliver optimal performance. LED's available in 3500, 4000 and 5000K with a CRI $\geq$ 85. Projected life is 60,000 hours at 91% lumen output. cULus listed. Electronic drivers are available for 120-277V applications. A 0-10V dimming control is available (standard). IP65 rated and NSF certified (4' only).

Lens


DR=Internal Prismatic Lens/15% DR High Impact Additive.
DR100=Internal Prismatic Lens/100% DR High Impact Additive.

Warranty


Vaportite LED features a five year limited warranty.

Compliance


UL/cUL listed for Wet location. RoHS compliant, and LED modules comply with IESNA LM-79 and LM-80 standards. DesignLights Consortium™ Qualified and classified for DLC Standard, refer to www.designlights.org for details.

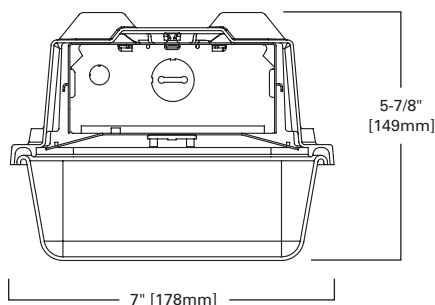

MOUNTING DATA

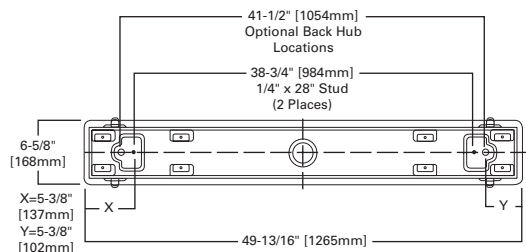

INSTALLATION DATA



MOUNTING BRACKETS
Furnished
Two per 2' and 4' Unit
Four per 8' Unit



OPTIONAL CHAN HANGING SET
(VT2-CHAIN/SET-U)
Includes 6 ft. of chain, 4 large S-Hooks and 4 small S-Hooks
Order One (1) Kit for each 2' or 4' Fixture



VAPORTITE LED

4' INDUSTRIAL LED LAMP


Vaportite Industrial Refrigerated Case



ENERGY DATA

Input Watts:
4VT2-LD4-4 (4,000 lumens)=38W
4VT2-LD4-6 (6,000 lumens)=57.3W
4VT2-LD4-8 (8,000 lumens)=81.1W

PHOTOMETRICS



4VT2-LD4-6-DR-UNV-L835-CD1-U
 Electronic Driver
 Linear LED 3500K
 Spacing criterion:
 (H) 1.2 x mounting
 height, (L) 1.2 x
 mounting height
 Lumens: 5882
 Input Watts: 56W
 Efficacy: 104.7 lm/W
 Test Report:
 4VT2-LD4-6-DR-
 UNV-L835-CD1-U.
 IES

Candlepower				
Angle	Along H	45°	Across L	
0	2000	2000	2000	
5	2007	1979	1980	
10	1981	1951	1956	
15	1930	1900	1903	
20	1857	1836	1844	
25	1764	1748	1765	
30	1645	1646	1660	
35	1511	1522	1534	
40	1375	1393	1468	
45	1221	1271	1438	
50	1062	1207	1343	
55	903	1175	1148	
60	749	1048	933	
65	600	1151	771	
70	461	591	600	
75	332	398	426	
80	206	249	255	
85	94	137	127	
90	34	75	63	

Coefficients of Utilization

rc rw RCR	Effective floor cavity reflectance 20%															
	80%				70%				50%				30%			
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	101	101
1	108	103	98	94	105	101	96	93	96	93	90	92	89	87	88	86
2	98	89	82	76	95	87	81	75	84	78	73	80	75	71	77	73
3	89	78	70	63	86	76	69	62	73	67	61	70	65	60	68	63
4	81	69	60	53	79	68	59	53	65	58	52	62	56	51	60	55
5	75	62	52	46	73	60	52	45	58	51	45	56	49	44	54	48
6	69	55	46	40	67	54	46	40	52	45	39	51	44	39	49	43
7	64	50	41	35	62	49	41	35	48	40	35	46	39	34	45	38
8	59	46	37	31	58	45	37	31	44	36	31	42	35	31	41	35
9	56	42	34	28	54	41	33	28	40	33	28	39	32	28	38	32
10	52	39	31	25	51	38	31	25	37	30	25	36	30	25	35	29

Zonal Lumen Summary

Zone	Lumens	% Fixture
0-30	1536	26.1
0-40	2490	42.3
0-60	4463	75.9
0-90	5804	98.7
0-180	5882	100.0

LUMEN MAINTENANCE

Ambient Temperature	TM-21 Lumen Maintenance (60,000 hours)	Theoretical L70 (Hours)
25°C	> 91%	> 247,000


ORDERING INFORMATION

SAMPLE NUMBER: 4VT2-LD4-4-DR-UNV-L840-CD1-WL-U

Series ⁽²⁾ 4VT2=4' Vaportite	Lamp Type LD4=LED 4.0	LED Lumens Output 4=4000 Lumens 6=6000 Lumens 8=8000 Lumens	Lens DR=Internal Prismatic Lens/15% DR High Impact Additive DR100=Internal Prismatic Lens/100% DR High Impact Additive FR50=Frosted Lens/15% DR High Impact Additive ⁽¹⁾	Distribution [Blank]=Medium (Standard) W=Wide Distribution	Voltage UNV=Universal Voltage 120-277	EL10W =10-watt, 120-277V emergency battery pack installed ⁽³⁾ VT-REM-EL =Remote Emergency Installed, 700 lumens ⁽³⁾	Lamps L835=3500K, LED L840=4000K, LED L850=5000K, LED	Driver Type CD1=1 Dimming Driver 5LTD1=5th Light DALI	WL =Wet Location Label	Options SSL=Stainless Steel Latches TH=(2) Top Watertite Hubs TEH=(2) Top and (2) End Watertite Hubs (all Watertite Hubs have 1/2" Conduit Entry)	Packaging U=Unit Pack
---	---------------------------------	---	---	---	---	--	---	--	-------------------------------	---	---------------------------------

NOTES: ⁽¹⁾ Not available in wide distribution. ⁽²⁾ DesignLights Consortium™ Qualified and classified for DLC Standard (some models are not DLC qualified), refer to www.designlights.org for details. ⁽³⁾ EL must specify 120 or 277V only.

Specifications & dimensions subject to change without notice. Consult your Eaton Representative for availability and ordering information.



4VT2-LD4-8-FR50-UNV-L835-CD1-WL-U
 Electronic Driver
 Linear LED 3500K
 Spacing criterion:
 (H) 1.2 x mounting
 height, (L) 1.3 x
 mounting height
 Lumens: 8553
 Input Watts: 81W
 Efficacy: 105.5 lm/W
 Test Report:
 4VT2-LD4-8-FR50-
 UNV-L835-CD1-WL-
 U.IES

Candlepower				
Angle	Along H	45°	Across L	
0	2854	2854	2854	
5	2857	2829	2842	
10	2811	2790	2804	
15	2733	2723	2742	
20	2626	2629	2658	
25	2484	2508	2545	
30	2316	2365	2408	
35	2120	2195	2253	
40	1904	2011	2086	
45	1678	1819	1914	
50	1451	1622	1736	
55	1222	1422	1558	
60	1009	1229	1368	
65	810	1034	1171	
70	622	843	959	
75	446	659	748	
80	287	487	555	
85	148	341	392	
90	45	228	271	


Coefficients of Utilization

rc rw RCR	Effective floor cavity reflectance 20%															
	80%				70%				50%				30%			
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30
0	118	118	118	118	115	115	115	115	109	109	109	104	104	104	99	99
1	107	102	97	93	104	99	95	91	94	91	87	90	87	84	85	83
2	97	88	81	75	94	86	79	74	82	76	72	78	73	69	74	71
3	88	77	69	62	85	75	68	61	72	65	60	69	63	58	66	61
4	81	68	59	53	78	67	58	52	64	57	51	61	55	50	59	53
5	74	61	52	45	72	60	51	45	57	50	44	55	48	43	53	47
6	69	55	46	39	66	54	45	39	52	44	38	50	43	38	48	42
7	64	50	41	35	62	49	41	35	47	40	34	45	39	34	44	38
8	59	46	37	31	57	45	37	31	43	36	30	42	35	30	40	34
9	55	42	34	28	54	41	33	28	40	32	27	38	32	27	37	31
10	52	39	31	25	50	38	30	25	37	30	25	36	29	25	34	29

Zonal Lumen Summary

Zone	Lumens	% Fixture
0-30	2200	25.7
0-40	3573	41.8
0-60	6232	96.4
0-90	8248	100.0
0-180	8553	100.0

Accessories (order separately)
VT2-Chain/Set-U=Chain Hanging Set
 Includes 6 ft. of chain, 4 large S-Hooks and 4 small S-Hooks
 Order One (1) Kit for each 2' or 4' Fixture
VT2-SS-MBK=Stainless Steel Mounting Bracket



SHIPPING DATA

Catalog No.	Wt.
4VT2-LD4	18 lbs.

DESCRIPTION

The Vaportite LED Series is an energy efficient industrial Vaportite fixture that features rugged and durable construction. The Vaportite LED incorporates a full metal fixture liner inside a reinforced fiberglass housing with a high impact diffuser. This Vaportite series is suitable for interior and exterior applications and can be surface or chain mounted.

The Vaportite LED Series has been designed for maximum operation in commercial institutional and industrial environments and can operate in a wide range of temperatures (-20°C to 25°C) and is ideal for cold storage environments.

SPECIFICATION FEATURES

Construction

Fiberglass housing is reinforced polyester and self-extinguishing (ASTM-D635-74) plastic of a permanent pearl gray color. A watertite hub for 1/2" conduit entry is provided at each end of housing (standard) for continuous feed. Polyurethane gasketing is formed in the housing providing a continuous seamless seal for the diffuser. Four sturdy cam latches clamp diffuser tightly for a positive seal between housing, gasketing and diffuser. Electrical components and fixtures are UL/ cUL listed for Wet Locations.

Electrical

Long-Life LED system coupled with electrical driver to deliver optimal performance. LED's available in 3500, 4000 and 5000K with a CRI $\geq$ 85. Projected life is 60,000 hours at 91% lumen output. cULus listed. Electronic drivers are available for 120-277V applications. A 0-10V dimming control is available (standard). IP65 rated and NSF certified (4' only).

Lens


DR=Internal Prismatic Lens/15% DR High Impact Additive.
DR100=Internal Prismatic Lens/100% DR High Impact Additive.

Warranty


Vaportite LED features a five year limited warranty.

Compliance


UL/cUL listed for Wet location. RoHS compliant, and LED modules comply with IESNA LM-79 and LM-80 standards. DesignLights Consortium™ Qualified and classified for DLC Standard, refer to www.designlights.org for details.

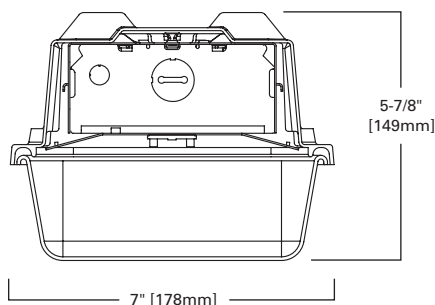


MOUNTING DATA

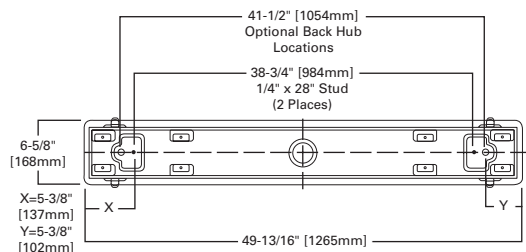

INSTALLATION DATA



MOUNTING BRACKETS
Furnished
Two per 2' and 4' Unit
Four per 8' Unit



OPTIONAL CHAN HANGING SET
(VT2-CHAIN/SET-U)
Includes 6 ft. of chain, 4 large S-Hooks and 4 small S-Hooks
Order One (1) Kit for each 2' or 4' Fixture



VAPORTITE LED

4' INDUSTRIAL LED LAMP


Vaportite Industrial Refrigerated Case



ENERGY DATA

Input Watts:
4VT2-LD4-4 (4,000 lumens)=38W
4VT2-LD4-6 (6,000 lumens)=57.3W
4VT2-LD4-8 (8,000 lumens)=81.1W

PHOTOMETRICS



4VT2-LD4-6-DR-UNV-L835-CD1-U
 Electronic Driver
 Linear LED 3500K
 Spacing criterion:
 (H) 1.2 x mounting
 height, (L) 1.2 x
 mounting height
 Lumens: 5882
 Input Watts: 56W
 Efficacy: 104.7 lm/W
 Test Report:
 4VT2-LD4-6-DR-
 UNV-L835-CD1-U.
 IES

Candlepower				
Angle	Along H	45°	Across L	
0	2000	2000	2000	
5	2007	1979	1980	
10	1981	1951	1956	
15	1930	1900	1903	
20	1857	1836	1844	
25	1764	1748	1765	
30	1645	1646	1660	
35	1511	1522	1534	
40	1375	1393	1468	
45	1221	1271	1438	
50	1062	1207	1343	
55	903	1175	1148	
60	749	1048	933	
65	600	1151	771	
70	461	591	600	
75	332	398	426	
80	206	249	255	
85	94	137	127	
90	34	75	63	

Coefficients of Utilization

rc rw RCR	Effective floor cavity reflectance 20%															
	80%				70%				50%				30%			
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	101	101
1	108	103	98	94	105	101	96	93	96	93	90	92	89	87	88	86
2	98	89	82	76	95	87	81	75	84	78	73	80	75	71	77	73
3	89	78	70	63	86	76	69	62	73	67	61	70	65	60	68	63
4	81	69	60	53	79	68	59	53	65	58	52	62	56	51	60	55
5	75	62	52	46	73	60	52	45	58	51	45	56	49	44	54	48
6	69	55	46	40	67	54	46	40	52	45	39	51	44	39	49	43
7	64	50	41	35	62	49	41	35	48	40	35	46	39	34	45	38
8	59	46	37	31	58	45	37	31	44	36	31	42	35	31	41	35
9	56	42	34	28	54	41	33	28	40	33	28	39	32	28	38	32
10	52	39	31	25	51	38	31	25	37	30	25	36	30	25	35	29

Zonal Lumen Summary

Zone	Lumens	% Fixture
0-30	1536	26.1
0-40	2490	42.3
0-60	4463	75.9
0-90	5804	98.7
0-180	5882	100.0

LUMEN MAINTENANCE

Ambient Temperature	TM-21 Lumen Maintenance (60,000 hours)	Theoretical L70 (Hours)
25°C	> 91%	> 247,000

ORDERING INFORMATION

SAMPLE NUMBER: 4VT2-LD4-4-DR-UNV-L840-CD1-WL-U

Series ⁽²⁾ 4VT2=4' Vaportite	Distribution [Blank]=Medium (Standard) W=Wide Distribution	Lamps L835=3500K, LED L840=4000K, LED L850=5000K, LED	WL=Wet Location Label	Options SSL=Stainless Steel Latches TH=(2) Top Watertite Hubs TEH=(2) Top and (2) End Watertite Hubs (all Watertite Hubs have 1/2" Conduit Entry)	Packaging U=Unit Pack
Lamp Type LD4=LED 4.0	Voltage UNV=Universal Voltage 120-277	Driver Type CD1=1 Dimming Driver 5LTD1=Fiith Light DALI			
LED Lumens Output 4=4000 Lumens 6=6000 Lumens 8=8000 Lumens	EL10W=10-watt, 120-277V emergency battery pack installed ⁽³⁾ VT-REM-EL=Remote Emergency Installed, 700 lumens ⁽³⁾				
Lens DR=Internal Prismatic Lens/15% DR High Impact Additive DR100=Internal Prismatic Lens/100% DR High Impact Additive FR50=Frosted Lens/15% DR High Impact Additive ⁽¹⁾				Accessories (order separately) VT2-Chain/Set-U=Chain Hanging Set Includes 6 ft. of chain, 4 large S-Hooks and 4 small S-Hooks Order One (1) Kit for each 2' or 4' Fixture VT2-SS-MBK=Stainless Steel Mounting Bracket	

NOTES: ⁽¹⁾ Not available in wide distribution. ⁽²⁾ DesignLights Consortium™ Qualified and classified for DLC Standard (some models are not DLC qualified), refer to www.designlights.org for details. ⁽³⁾ EL must specify 120 or 277V only.

Specifications & dimensions subject to change without notice. Consult your Eaton Representative for availability and ordering information.

SHIPPING DATA

Catalog No.	Wt.
4VT2-LD4	18 lbs.