ARROW HART

Straight Blade Plugs & Connectors for Any Application Arrow Hart's extensive offering of straight blade plugs and connectors cover the full range of Hospital, Industrial and Commercial Specification Grades for applications where quality and durability are critical

Features & Benefits



Hospital Specification Grade Plugs & Connectors

Built to meet and exceed UL Federal Specification and Hospital Grade testing, Arrow Hart's Hospital Grade Plugs and Connectors assure reliable performance in the most demanding healthcare applications.



Industrial Specification Grade Plugs, Connectors, Flanged Inlet & Flanged Outlets

With a variety of styles including SafetyGrip, AutoGrip and QuickGrip, these devices are designed to install quickly and easily and provide reliable performance in tough industrial environments.




Commercial Specification Grade Straight Blade Plugs & Connectors

Designed for light commercial applications, where ease-of-use, value and quality are critical.



Specification Grade Straight Blade Power Devices

Heavy duty design and construction make Arrow Hart power devices ideal for any high amperage industrial or commercial power connectivity application.

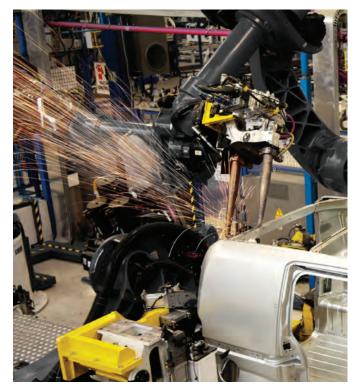










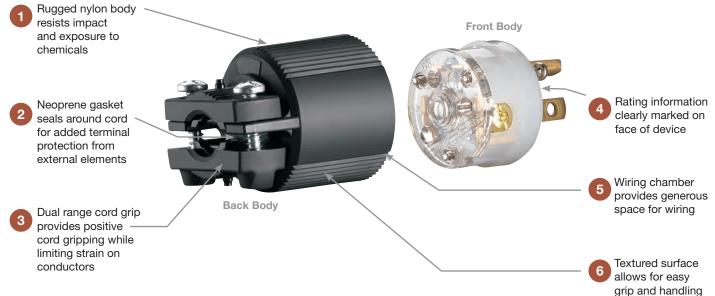



SafetyGrip Hospital Grade devices exceed Federal Spec. and Hospital Grade testing for use in demanding healthcare environments



Clear terminal cover allows for easy inspection of conductors and terminations



Retained quick drive assembly screws speed installation



Four position angled plug option is ideal for applications requiring power cord to lay close to walls and floors




Tapered, individual wire pockets guide stranded wire into contact area for ease of installation




Multiple-head drive screws provide versatility for ease of use



QuickGrip Hospital and Industrial Grade Plugs & Connectors

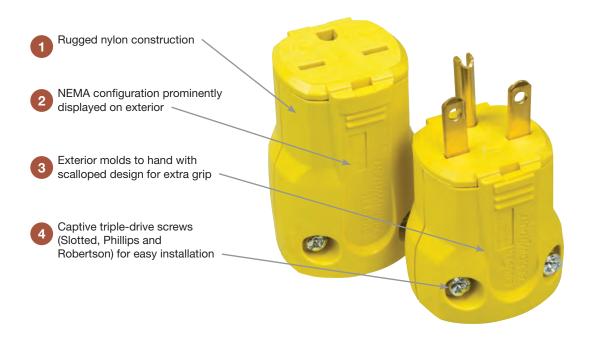

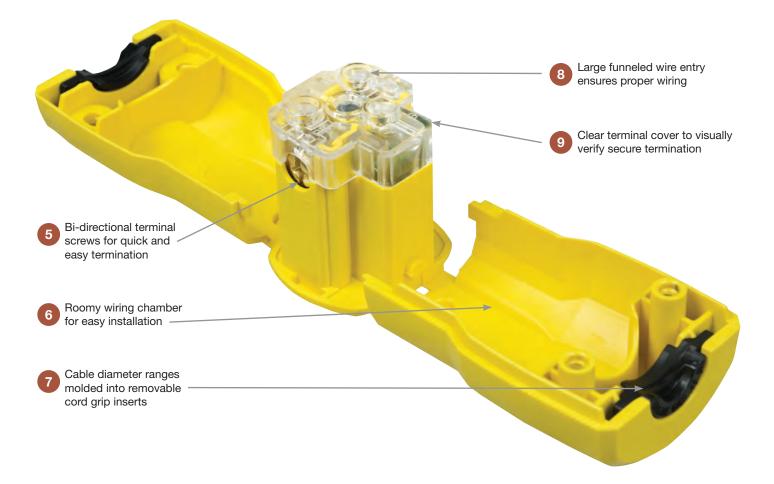







AutoGrip Hospital and Industrial Grade Plugs & Connectors





AutoGrip Hospital Grade devices exceed Federal Spec. and Hospital Grade testing for use in demanding healthcare environments



Unique clamp design secures cord during assembly, reducing installation time



Retained quick drive assembly screws speed installation



Multiple-head drive screws provide versatility for ease of use




Tapered, individual wire pockets guide stranded wire into contact area for ease of installation



Hospital Grade Straight Blade Plugs & Connectors

2-Pole, 3-Wire Grounding 15A, 125V/AC **NEMA 5-15**



Но	spita	I Grad	e Plugs & Connectors					
Ra A	iting V/AC	NEMA	Description	Cord Diameter	Color	Plug Catalog No.	Connector Catalog No.	٩
15	125	5-15	SafetyGrip Straight Body	0.33-0.66" (8.3-16.7mm)	BK & W	□ 6266HG	□ 6269HG	•
			SafetyGrip Straight Body	0.33-0.66" (8.3-16.7mm)	С	□ 6266HGC	□ 6269HGC	•
			SafetyGrip Angled Body	0.33-0.66" (8.3-16.7mm)	BK & W	□ 6265HG		•
			SafetyGrip Angled Body	0.33-0.66" (8.3-16.7mm)	С	□ 6265HGC		•
			QuickGrip Straight Body	0.22-0.66" (5.6-16.7mm)	W	□ AH8115W	□ AH8119W	
			AutoGrip Straight Body	0.33-0.66" (8.3-16.7mm)	BK & W	□ 5266NHG	□ 5269NHG	•
			AutoGrip Isolated Ground, Straight Body	0.33-0.66" (8.3-16.7mm)	RN	□ IG5266NHG	_	•

6265HGC



1.37" (34.8mm)

1.50" (38.1mm)

1.46" (37.1mm)

1 28' (32.5mm) 2.06" (52.3mm)

50'

(38.1mm)

1.44 (36.6mm

6266HG

2.06

(52.3mm)

AH8119W



5369NHG

Hospital Grade Straight Blade Plugs & Connectors

2-Pole, 3-Wire Grounding 20A, 125V/AC **NEMA 5-20**



Но	spita	I Grad	le Plugs & Connectors		I <u>M</u> 26			
Ra A	ating V/AC	NEMA	Description	Cord Diameter	Color	Plug Catalog No.	Connector Catalog No.	٩
20	125	5-20	SafetyGrip Straight Body	0.33-0.66" (8.3-16.7mm)	BK & W	□ 6766HG†	□ 6769HG†	•
			SafetyGrip Angled Body	0.33-0.66" (8.3-16.7mm)	BK & W	□ 6765HG [†]		•
			SafetyGrip Angled Body	0.33-0.66" (8.3-16.7mm)	С	□ 6765HGC [†]		•
			AutoGrip Straight Body	0.33-0.66" (8.3-16.7mm)	BK & W	□ 5366NHG*	□ 5369NHG	•

† Not Nom Spec, * Not Fed Spec

Hospital Grade Dimensional Information: B-14

Specification Information: SafetyGrip HG Plugs & Connectors: B-21 AutoGrip HG Plugs & Connectors: B-21 QuickGrip HG Plugs & Connectors: B-21

Color Information:

BK (Black), C (Clear), RN (Orange), W (White)



Specifications and availability are subject to change without notice.

Indicates NAFTA Compliant - Page R-30




Hospital Grade Straight Blade Receptacles

Premium Hospital Grade Receptacles

2-Pole, 3-Wire Grounding 15A, 250V/AC; 20A, 250V/AC NEMA 6-15R, 6-20R

F 🕕 S 🚯



 $\mathbf{\Sigma}$

• •

•

•

•


Catalog No.

□ AH8600

□ AH8400

8610

□ 8410_



1.31" (33.3mn

21.1mm)

4.19" (106.4mm) 3.28' (83.3mm)

8410

Rating V/AC NEMA Description Color Suffix Α 250 15 6-15R Duplex Receptacle, Back & Side Wire V, W Single Receptacle, Back & Side Wire V, W 20 250 6-20R Duplex Receptacle, Back & Side Wire B, GY, RD, V, W Single Receptacle, Back & Side Wire B, GY, RD, V, W

Accessories for Hospital Grade NEMA 6-15 & 6-20 Receptacles

Description	Catalog No.	٩
1-Gang standard size duplex receptacle nylon wallplate, lvory	□ 5132V	•
1-Gang standard size single receptacle wallplate, CuVerro	□ 93091CU	•
1-Gang mid-size duplex receptacle polycarbonate wallplate, Light Almond	🗆 PJ8LA	
1-Gang standard size duplex receptacle wallplate, CuVerro	□ 93101CUR	•

(U)





1CU PJ8LA





(B

For ordering devices, include Catalog No. followed by the Color Suffix: B (Brown), GY (Gray), RD (Red), V (Ivory), W (White)

в	GY	RD	v	w	
Brown)	(Gray)	(Red)	(Ivory)	(White)	

Premium HG Receptacles: A-26 ArrowLink Premium HG Receptacles: A-30 & A-31 CuVerro Wallplates L-22

Specification Information:

Specifications and availability are subject to change without notice.

ArrowLink™ option available. Add "M" suffix to Standard catalog number (example AH8300W, AH8300WM). For ordering information on ArrowLink & ArrowLink SPD connectors, see Page K-2

Build-To-Spec Customizable Devices - Page K-4

Indicates NAFTA Compliant - Page R-30


COOPER Wiring Devices

Α



Hospital Grade Straight Blade Plugs & Connectors

2-Pole, 3-Wire Grounding 15A, 250V/AC **NEMA 6-15**



Hospital Grade Plugs & Connectors с 🕕 us F 🕀 S Cord Rating Plug Connector V/AC NEMA Description Diameter Color Catalog No. Catalog No. 15 250 6-15 SafetyGrip Angled Body 0.33-0.66" BK & W 🗆 6665HG (8.3-16.7mm) 0.33-0.66" С □ 6665HGC SafetyGrip Angled Body ____ (8.3-16.7mm)

Hospital Grade Straight Blade Plugs & Connectors

2-Pole, 3-Wire Grounding 20A, 250V/AC **NEMA 6-20**

G G∪


6-20P 6-20R

ŀ





Но	Hospital Grade Plugs & Connectors			։ 🔍 ՍՏ F 🕀 Տ			
Ra A	ating V/AC	NEMA	Description	Cord Diameter	Color	Plug Catalog No.	Connector Catalog No.
20	250	6-20	SafetyGrip Angled Body	0.33-0.66" (8.3-16.7mm)	BK & W	□ 6865HG	
			SafetyGrip Angled Body	0.33-0.66" (8.3-16.7mm)	С	□ 6865HGC	



С w BΚ (Black) (White) (Clear)

Specifications and availability are subject to change without notice.



Specification Information: Safety Grip HG Plugs & Connectors: B-21

Hospital Grade Dimensional

Information: B-14

ARROW HART

Straight Blade Plugs & Connectors for Any Application Arrow Hart's extensive offering of straight blade plugs and connectors cover the full range of Hospital, Industrial and Commercial Specification Grades for applications where quality and durability are critical

Features & Benefits



Hospital Specification Grade Plugs & Connectors

Built to meet and exceed UL Federal Specification and Hospital Grade testing, Arrow Hart's Hospital Grade Plugs and Connectors assure reliable performance in the most demanding healthcare applications.



Industrial Specification Grade Plugs, Connectors, Flanged Inlet & Flanged Outlets

With a variety of styles including SafetyGrip, AutoGrip and QuickGrip, these devices are designed to install quickly and easily and provide reliable performance in tough industrial environments.




Commercial Specification Grade Straight Blade Plugs & Connectors

Designed for light commercial applications, where ease-of-use, value and quality are critical.



Specification Grade Straight Blade Power Devices

Heavy duty design and construction make Arrow Hart power devices ideal for any high amperage industrial or commercial power connectivity application.

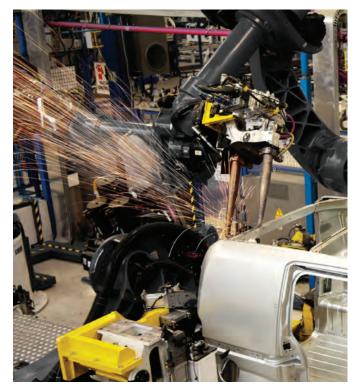










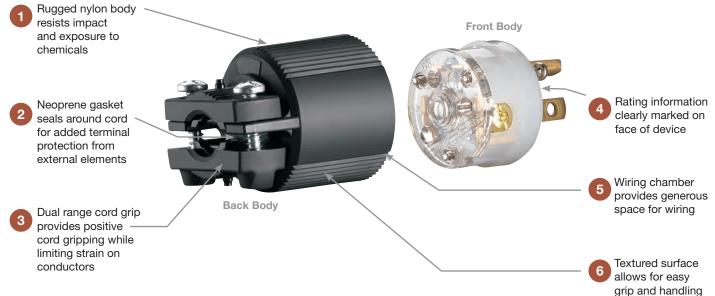



SafetyGrip Hospital Grade devices exceed Federal Spec. and Hospital Grade testing for use in demanding healthcare environments



Clear terminal cover allows for easy inspection of conductors and terminations



Retained quick drive assembly screws speed installation



Four position angled plug option is ideal for applications requiring power cord to lay close to walls and floors




Tapered, individual wire pockets guide stranded wire into contact area for ease of installation




Multiple-head drive screws provide versatility for ease of use



QuickGrip Hospital and Industrial Grade Plugs & Connectors

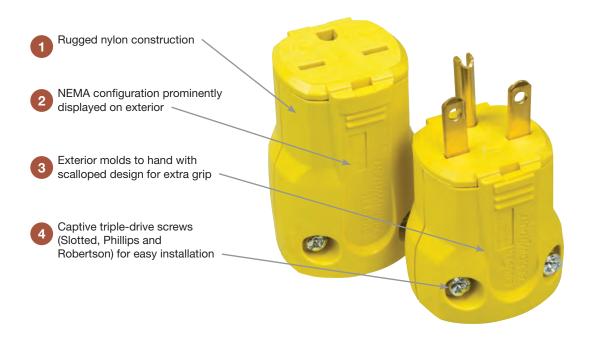

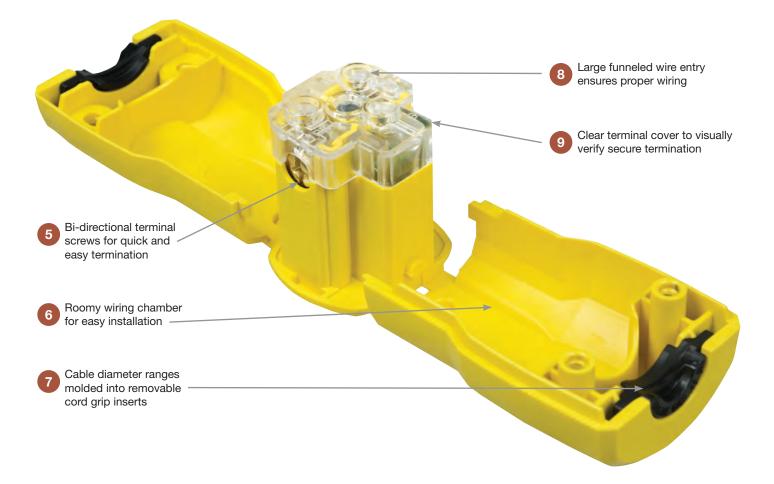







AutoGrip Hospital and Industrial Grade Plugs & Connectors





AutoGrip Hospital Grade devices exceed Federal Spec. and Hospital Grade testing for use in demanding healthcare environments



Unique clamp design secures cord during assembly, reducing installation time



Retained quick drive assembly screws speed installation



Multiple-head drive screws provide versatility for ease of use




Tapered, individual wire pockets guide stranded wire into contact area for ease of installation



Hospital Grade Straight Blade Plugs & Connectors

2-Pole, 3-Wire Grounding 15A, 125V/AC **NEMA 5-15**



Но	spita	I Grad	e Plugs & Connectors					
Ra A	iting V/AC	NEMA	Description	Cord Diameter	Color	Plug Catalog No.	Connector Catalog No.	٩
15	125	5-15	SafetyGrip Straight Body	0.33-0.66" (8.3-16.7mm)	BK & W	□ 6266HG	□ 6269HG	•
			SafetyGrip Straight Body	0.33-0.66" (8.3-16.7mm)	С	□ 6266HGC	□ 6269HGC	•
			SafetyGrip Angled Body	0.33-0.66" (8.3-16.7mm)	BK & W	□ 6265HG		•
			SafetyGrip Angled Body	0.33-0.66" (8.3-16.7mm)	С	□ 6265HGC		•
			QuickGrip Straight Body	0.22-0.66" (5.6-16.7mm)	W	□ AH8115W	□ AH8119W	
			AutoGrip Straight Body	0.33-0.66" (8.3-16.7mm)	BK & W	□ 5266NHG	□ 5269NHG	•
			AutoGrip Isolated Ground, Straight Body	0.33-0.66" (8.3-16.7mm)	RN	□ IG5266NHG	_	•

6265HGC



1.37" (34.8mm)

1.50" (38.1mm)

1.46" (37.1mm)

1 28' (32.5mm) 2.06" (52.3mm)

50'

(38.1mm)

1.44 (36.6mm

6266HG

2.06

(52.3mm)

AH8119W



5369NHG

Hospital Grade Straight Blade Plugs & Connectors

2-Pole, 3-Wire Grounding 20A, 125V/AC **NEMA 5-20**



Но	spita	I Grad	le Plugs & Connectors		I <u>M</u> 26			
Ra A	ating V/AC	NEMA	Description	Cord Diameter	Color	Plug Catalog No.	Connector Catalog No.	٩
20	125	5-20	SafetyGrip Straight Body	0.33-0.66" (8.3-16.7mm)	BK & W	□ 6766HG†	□ 6769HG†	•
			SafetyGrip Angled Body	0.33-0.66" (8.3-16.7mm)	BK & W	□ 6765HG [†]		•
			SafetyGrip Angled Body	0.33-0.66" (8.3-16.7mm)	С	□ 6765HGC [†]		•
			AutoGrip Straight Body	0.33-0.66" (8.3-16.7mm)	BK & W	□ 5366NHG*	□ 5369NHG	•

† Not Nom Spec, * Not Fed Spec

Hospital Grade Dimensional Information: B-14

Specification Information: SafetyGrip HG Plugs & Connectors: B-21 AutoGrip HG Plugs & Connectors: B-21 QuickGrip HG Plugs & Connectors: B-21

Color Information:

BK (Black), C (Clear), RN (Orange), W (White)




Specifications and availability are subject to change without notice.

Indicates NAFTA Compliant - Page R-30



Hospital Grade Straight Blade Receptacles

2-Pole, 3-Wire Grounding 15A, 250V/AC; 20A, 250V/AC NEMA 6-15R, 6-20R





1.31" (33.3mn

21.1mm)

4.19" (106.4mm) 3.28' (83.3mm)

8410

Premium Hospital Grade Receptacles (U) F 🕕 S 🚯 Rating $\mathbf{\Sigma}$ V/AC NEMA Description Color Suffix Catalog No. Α 250 □ AH8600 15 6-15R Duplex Receptacle, Back & Side Wire V, W • . Single Receptacle, Back & Side Wire V, W 8610 • • 20 250 6-20R Duplex Receptacle, Back & Side Wire B, GY, RD, V, W □ AH8400 Single Receptacle, Back & Side Wire B, GY, RD, V, W □ 8410_ •

Accessories for Hospital Grade NEMA 6-15 & 6-20 Receptacles

Description	Catalog No.	٩
1-Gang standard size duplex receptacle nylon wallplate, lvory	□ 5132V	•
1-Gang standard size single receptacle wallplate, CuVerro	□ 93091CU	•
1-Gang mid-size duplex receptacle polycarbonate wallplate, Light Almond	🗆 PJ8LA	
1-Gang standard size duplex receptacle wallplate, CuVerro	□ 93101CUR	•





1CU PJ8LA



Color Ordering Information:

(B

For ordering devices, include Catalog No. followed by the Color Suffix: B (Brown), GY (Gray), RD (Red), V (Ivory), W (White)

в	GY	RD	v	w
Brown)	(Gray)	(Red)	(Ivory)	(White)

Premium HG Receptacles: A-26 ArrowLink Premium HG Receptacles: A-30 & A-31 CuVerro Wallplates L-22

Specification Information:

Specifications and availability are subject to change without notice.

ArrowLink™ option available. Add "M" suffix to Standard catalog number (example AH8300W, AH8300WM). For ordering information on ArrowLink & ArrowLink SPD connectors, see Page K-2

Build-To-Spec Customizable Devices - Page K-4

Indicates NAFTA Compliant - Page R-30





Hospital Grade Straight Blade Plugs & Connectors

2-Pole, 3-Wire Grounding 15A, 250V/AC **NEMA 6-15**



Но	spita	I Grad	e Plugs & Connectors				
Ra A	ating V/AC	NEMA	Description	Cord Diameter	Color	Plug Catalog No.	Connector Catalog No.
15	250	6-15	SafetyGrip Angled Body	0.33-0.66" (8.3-16.7mm)	BK & W	□ 6665HG	
			SafetyGrip Angled Body	0.33-0.66" (8.3-16.7mm)	С	□ 6665HGC	

Hospital Grade Straight Blade Plugs & Connectors

2-Pole, 3-Wire Grounding 20A, 250V/AC **NEMA 6-20**



ŀ

6-20P 6-20R





Но	spita	I Grad	le Plugs & Connectors	։ (Ա) սօ F (Ա) Տ			
Ra A	ating V/AC	NEMA	Description	Cord Diameter	Color	Plug Catalog No.	Connector Catalog No.
20	250	6-20	SafetyGrip Angled Body	0.33-0.66" (8.3-16.7mm)	BK & W	□ 6865HG	
			SafetyGrip Angled Body	0.33-0.66" (8.3-16.7mm)	С	□ 6865HGC	



С w BΚ (Black) (White) (Clear)

Specifications and availability are subject to change without notice.



Specification Information:

Safety Grip HG Plugs & Connectors: B-21

Hospital Grade Dimensional

Information: B-14