|	
Brand Name:	Milbank
Type:	Panel for Mounting Electronic Controls
Application:	Enclosure Accessory
Material:	Steel
Shape:	Rectangle
Color:	White
Mounting:	Stud Mount

Utility requirements may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must always be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.
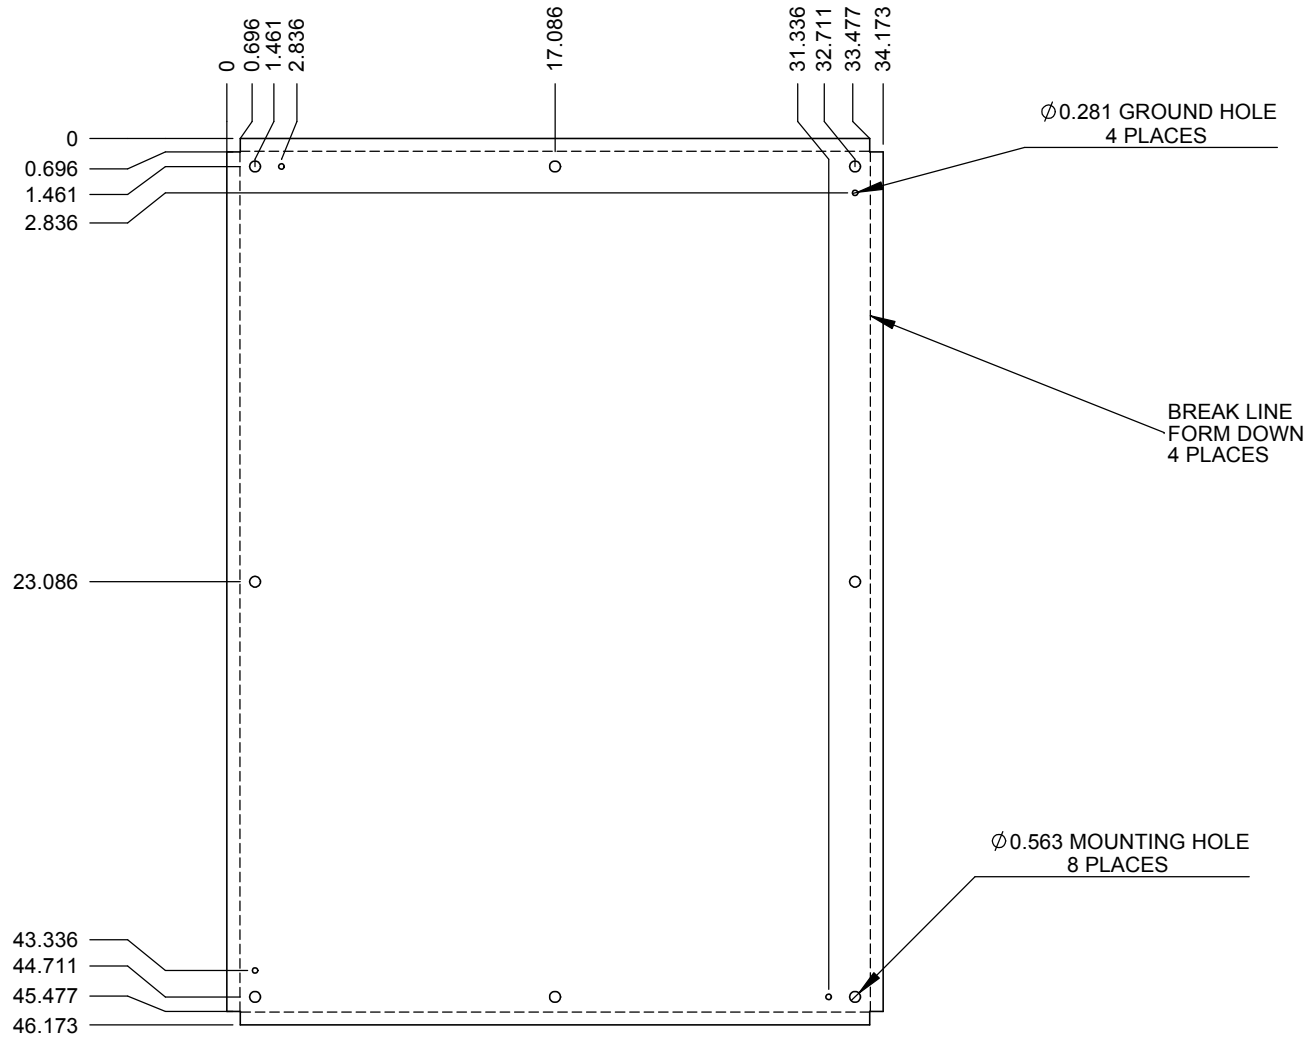
33.000 O.D.

15.625

15.625

0.875 O.D.
TYP

0.750 O.D.

0.750 O.D.

0.875 O.D.
TYP

21.625

45.000

21.625

2.250 O.D.
TYP

0.875 O.D.
TYP
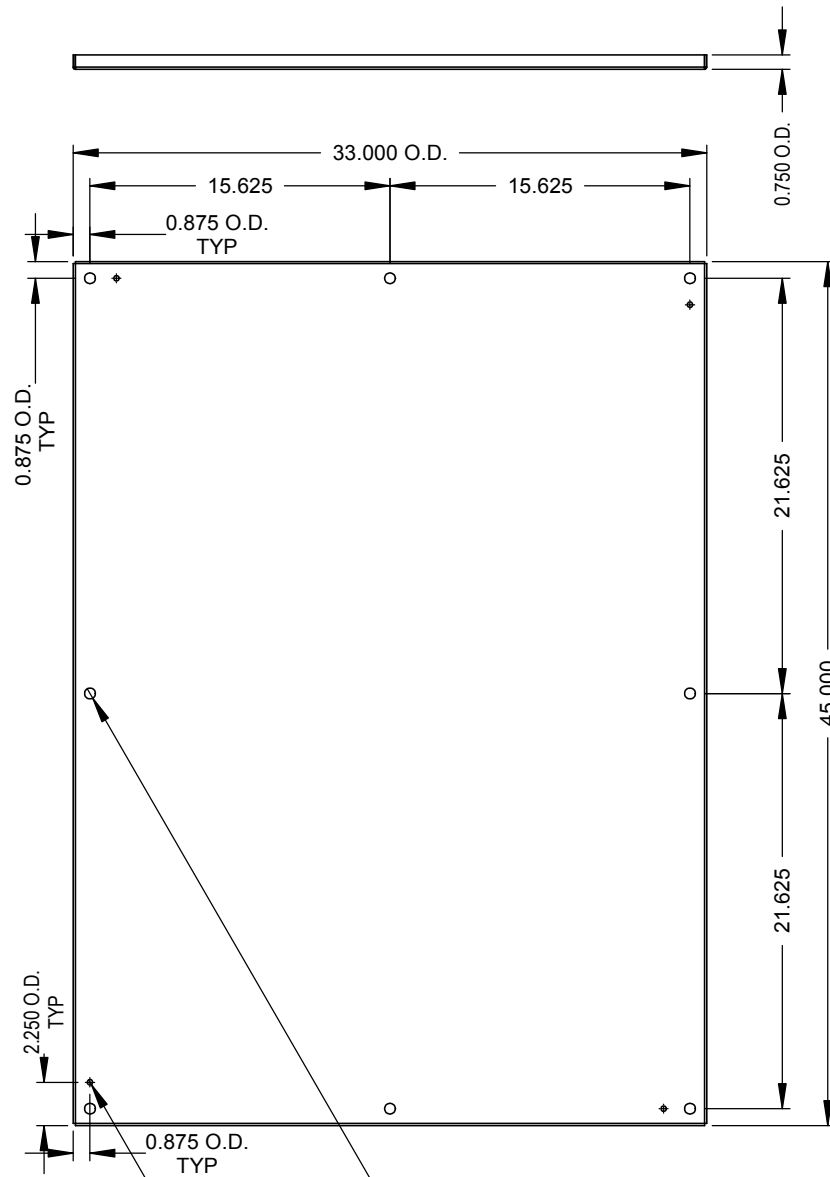
⌀0.563 MOUNTING HOLE
8 PLACES

⌀0.281 GROUND HOLE
4 PLACES

Material:		12 GA.		
Finish:		PAINTED WHITE		

MILBANK ENERGY AT WORK
General Offices:
Kansas City, MO

Title: PANEL
48 x 36 - ENCLOSURE

Catalog No.: A-48P36

Ref:

Tolerances: Unless Specified Otherwise		Third Angle
X.X	±.1	
X.XX	±.03	
X.XXX	±.015	
X°	±2°	
		Projection

Scale:	NTS	Checked By:	Drawing No.: **1012357**
Drawn By:	AJS	Approved By:	Date: 5/21/14 Sheet 1 of 2

| ** | 5/21/14 | FIRST RELEASE | AJS | |

Top dimensions (left to right): 0, 0.696, 1.461, 2.836, 17.086, 31.336, 32.711, 33.477, 34.173

Left dimensions (top to bottom): 0, 0.696, 1.461, 2.836, 23.086, 43.336, 44.711, 45.477, 46.173

$\varnothing$0.281 GROUND HOLE
4 PLACES

BREAK LINE
FORM DOWN
4 PLACES

$\varnothing$0.563 MOUNTING HOLE
8 PLACES

Material:		12 GA.		MILBANK ENERGY AT WORK	General Offices: Kansas City, MO
Finish:		PAINTED WHITE		Title:	PANEL 48 x 36 - ENCLOSURE
Tolerances: Unless Specified Otherwise X.X ±.1 X.XX ±.03 X.XXX ±.015 X° ±2°		Third Angle Projection		Catalog No.:	A-48P36
				Ref:	
**	5/21/14 FIRST RELEASE AJS	Scale: NTS	Checked By:	Drawing No.:	1012357
	Drawn By: AJS	Approved By:		Date: 5/21/14	Sheet 2 of 2