


TECHNICAL DATA SHEET

Brackets and washers, magnetic SuperMag™

Superstrut®

Magnetic brackets and square washers make strut easier to assemble.



Features:

- Magnets allow brackets to temporarily hold to strut to aid in assembly


Materials/Finishes:

- Low-carbon steel
- GoldGalv and SilverGalv finishes available

Standard dimensions:

- Thickness: 0.24"
- Width: 1.61"
- Hole size: 0.56"
- Hole spacing: 0.81" from end, 1.88" hole-to-hole


**AB202M
AB202M EG**
90° bracket (2 hole)



Design Load, recommended	
Strut part no:	Load (lbs)
A-1200	1500
A-1400	1000


Design Load, recommended	
Strut part no:	Load (lbs)
A-1200	1000
A-1400	650

**AB205M
AB205M EG**
90° bracket (4 hole)

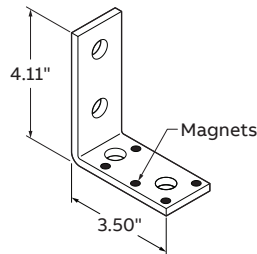

Design Load, recommended	
Strut part no:	Load (lbs)
A-1200	2000
A-1400	2000


ZAB206M
ZAB206MEG
 Flat bracket (2 hole)



Design Load, recommended	
Strut part no:	Load (lbs)
A-1200	1000
A-1400	800


Strut Load Strut Both ends Supported

Washer
 (1 hole)




Product selection	
Part no:	ØA
AB241M 1/4	5/16"
AB241M 3/8	7/16"
AB241M 1/2	9/16"


ZX207M
ZX207MEG
 Flat bracket (4 hole)

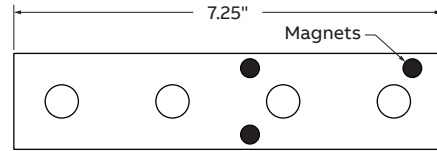

AB219M
AB219M EG
 90° "L" bracket (3 hole)



ZN219M
ZN219MEG
 90° "L" bracket (4 hole)



AB220M
AB220M EG
 Flat "T" bracket (4 hole)

