Powertite® Series Pin and Sleeve Plugs, Connectors and Receptacles

Applications

- Designed to supply power to portable or fixed electrical equipment such as motor generator units, welders, pumps, compressors, cellular relay stations, and similar apparatus.
- Ideal for use on shipping docks, ports, and other “ship to shore” applications.
- Suitable for use in locations where a weatherproof enclosure is required.
- Rough usage construction.




30 and 60 Amp



100 and 150 Amp



200 Amp



400 Amp

Features

- Available in 30, 60, 100, 150, 200, and 400 Amp units.
- Available in two grounding styles: Style 1 (shell only) and Style 2 (shell and extra pole).
- Neoprene bushing compressed by cable collar prevents entrance of water. Bushing is highly resistant to hydrocarbon deterioration and is self-extinguishing.
- Locking screw and slot prevents plug cable collar from “backing off.”
- Contacts exert constant pressure along entire contact surface and provide electrical continuity.
- Suitable for use from -40 °F/-40 °C to 225 °F/107 °C.
- Insulating blocks provide greatest dielectric and mechanical strength and lowest arc tracking.
- Positive polarization: only plugs and receptacles of same style, number of poles and ampere rating can be used together.
- Circuit breaking: in 30, 60, 100, and 200 Amp units, any arcing created as line and load terminals disengage is safely confined deep within terminal cavities. Plugs may be withdrawn in an emergency under full rated loads without separate disconnect switches (400 Amp plug is for disconnecting use only; not for current rupturing).
- 30, 60, 100, and 150 Amp Powertite® plugs also suitable for classified locations when used with Appleton EBR, EBRH, JBR, MD2SR, or DBR explosion-proof interlocking receptacles.
- Controlled length contacts ensure that ground makes first and breaks last for added safety.

Standard Materials

- Plug, receptacle, connector and mounting box housings: copperfree (4/10 of 1% max.) aluminum
- Insulating blocks: glass filled polyester

Standard Finishes

- Aluminum plug, receptacle, connector and mounting box housings: epoxy powder coat
- Insulating blocks and contacts: natural finish

Options

- See Illustrated Options

Certifications and Compliances

- UL Standard: UL 1682, UL 1686, UL 50E
- UL Listed: E145916, E145917
- CSA Standard: C22.2 No. 182.1
- CSA Certified: 065179
- NEMA 4X (30, 60, 100, 150, and 200 Amp)
- NEMA Configuration: FB11

Related Products

- For classified location plugs and receptacles, *see Plugs and Receptacles: Hazardous Location.*

Classified by UL and Certified by CSA for use in specific combinations with Crouse-Hinds Arktite. Arktite is a registered trademark of Cooper Crouse-Hinds.

© September 2010

Aluminum Mounting Boxes

For Powertite® 30, 60, 100, and 150 Amp Receptacles

30 Amp






Hub Size (Inches)	AEE	AERH	AERC	AERA
1/2	**AEE13**	**AERH13**	**AERC13**	**AERA13**
3/4	**AEE23**	**AERH23**	**AERC23**	**AERA23**
1	**AEE33**	**AERH33**	**AERC33**	**AERA33**

60 and 100 Amp






Hub Size (Inches)	AEE	AERH	AERC	AERA
1	**AEE36**	**AERH36**	**AERC36**	**AERA36**
1-1/4	**AEE46**	**AERH46**	**AERC46**	**AERA46**
1-1/2	**AEE56**	**AERH56**	**AERC56**	**AERA56**

60, 100, and 150 Amp




Hub Size (Inches)	AJA Back Box and Adapter *	Angle Adapter Only
1	**AJA310**	**AJA100**
1-1/4	**AJA410**	
1-1/2	**AJA510**	
2	**AJA610**	

Replacement Receptacle Mounting Gasket

Amp	Back Box Type	Part Number
30	AEE, AERH, AERC, AERA	**69060871000**
60, 100	AEE, AERH, AERC, AERA	**69060567000**
60, 100, 150	AJA	**69009497000**


** Feed-Thru box furnished with one close-up plug in bottom recessed hub.*

© September 2010

Powertite® 30, 60, 100, and 150 Amp Mounting Box Dimensions


600 Vac, 250 Vdc, 50-400 Hz

AJA Mounting Boxes

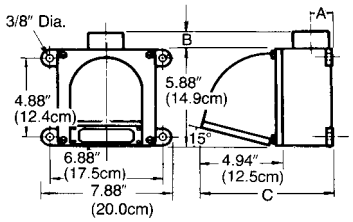

Amp	Hub Size (Inches)	Dimensions in Inches/Millimeters A	B †	C
60, 100 and 150	1	1.13/28.7	0.56/14.2	8.0/203.2
	1-1/4	1.13/28.7	0.56/14.2	8.0/203.2
	1-1/2	1.50/38.1	0.56/14.2	8.0/203.2
	2	1.50/38.1	0.56/14.2	8.0/203.2

AJA100 Angle Adapter

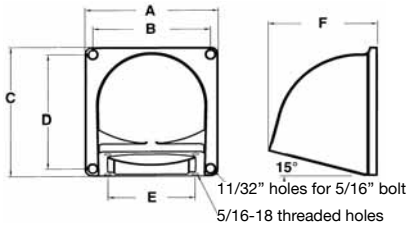

Dimensions in Inches/Millimeters A	B	C	D	E	F
5.87/149.0	5.18/131.5	5.87/149.0	5.18/131.5	3.50/88.9	4.81/122.1


† AJA has two hubs. Close-up plug furnished in bottom recessed hub.

© January 2011

Powertite® 30, 60, 100, and 150 Amp Mounting Box Dimensions


600 Vac, 250 Vdc, 50-400 Hz

AERA *, AERC ‡ and AERH Mounting Boxes

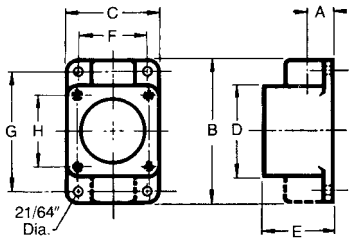

Amp	Hub Size (Inches)	Dimensions in Inches/Millimeters								
		A *	B ‡	C	D	E	F	G	H	J
30	1/2	0.69/17.5	5.31/134.8	3.38/85.8	3.38/85.8	2.50/63.5	2.63/66.8	4.56/115.8	2.72/69.0	0.94/23.8
30	3/4	0.75/19.0	5.31/134.8	3.38/85.8	3.38/85.8	2.50/63.5	2.63/66.8	4.56/115.8	2.72/69.0	0.94/23.8
30	1	0.81/20.5	5.31/134.8	3.38/85.8	3.38/8.6	2.50/63.5	2.63/66.8	4.56/115.8	2.72/69.0	0.94/23.8
60	1	0.81/20.5	6.50/165.1	4.25/107.9	4.25/107.9	3.13/79.5	3.50/88.9	5.88/149.3	3.50/8.9	1.38/35.0
60	1-1/4	0.94/23.8	6.50/165.1	4.25/107.9	4.25/107.9	3.13/79.5	3.50/88.9	5.88/149.3	3.50/88.9	1.38/35.0
60	1-1/2	1.00/25.4	6.50/165.1	4.25/107.9	4.25/107.9	3.13/79.5	3.50/88.9	5.88/149.3	3.50/88.9	1.38/35.0

AEE Mounting Box

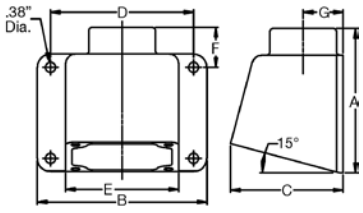

Amp	Hub Size (Inches)	Dimensions in Inches/Millimeters						
		A	B	C	D	E	F	G
30	1/2, 3/4, 1	4.12/104.6	5.00/127.0	3.33/84.5	4.25/107.9	3.38/85.8	1.18/29.9	1.10/27.9
60	1, 1-1/4, 1-1/2	5.41/137.4	6.38/162.0	4.23/107.4	5.38/136.6	4.25/107.9	1.50/38.1	1.50/38.1

** Dimension "A" for AERA only.*
‡ Dimension "B" for AERC only.

© September 2010

Powertite® 200 and 400 Amp Mounting Boxes and Replacement Interiors

600 Vac, 250 Vdc, 50-400 Hz.

200 Amp Mounting Boxes and Angle Adapter






Hub Size (Inches)	AJB	AJA	AJAC (Feed–Thru)	AJA200 (Angle Adapter Only)
1-1/2 NPT	—	**AJA520**	—	**AJA200**
2 NPT	**AJB620**	**AJA620**	—	**AJA200**
2-1/2 NPT	—	**AJA720**	**AJAC720**	**AJA200**
2-3/8 (Slip Hole)	**AJB238**	—	—	—

400 Amp Mounting Box and Angle Adapter




Hub Size (Inches)	AJAC *	AJA400 (Angle Adapter Only)
4	**AJAC400**	**AJA400**

200 Amp Interiors †






Grounding Style	Wire/Pole	Receptacle	Plug	Receptacle	Plug
Style 1 (Shell Only)	3W, 3P	**ARI20033**	**API20033**	—	—
	4W, 4P	**ARI20044**	**API20044**	—	—
Style 2 (Shell and Extra Pole)	2W, 3P	—	—	**ARI20023**	**API20023**
	3W, 4P	—	—	**ARI20034**	**API20034**

400 Amp Interiors †






Wire Recess Dia. (Inches)	Grounding Style	Wire/Pole	Receptacle	Plug	Receptacle	Plug
.84	Style 1 (Shell Only)	3W, 3P	**ARI40033**	**API40033**	—	—
		4W, 4P	**ARI40044**	**API40044**	—	—
	Style 2 (Shell and Extra Pole)	2W, 3P	—	—	**ARI40023**	**API40023**
		3W, 4P	—	—	**ARI40034**	**API40034**
1.25	Style 1 (Shell Only)	3W, 3P	**ARI40133**	**API40133**	—	—
		4W, 4P	**ARI40144**	**API40144**	—	—
	Style 2 (Shell and Extra Pole)	2W, 3P	—	—	**ARI40123**	**API40123**
		3W, 4P	—	—	**ARI40134**	**API40134**

** Has feed-thru 4" tapped openings. Supplied with one 4" to 3" reducer and one 4" close-up plug.*


† Pins and sleeves are not sold separately.

© September 2010

Powertite® 200 Amp Connector, Plug and Adapter Dimensions

600 Vac, 250 Vdc, 50-400 Hz.


Connector Body



Back View Side View

	Dimensions in Inches/Millimeters		
No. Poles	A	B	C
3	13.00/330.2	4.19/106.4	5.38/136.6
4	13.00/330.2	4.56/115.8	5.75/146.0


Plug



Back View Side View

	Dimensions in Inches/Millimeters				
No. Poles	A	B	C	D	E
3	11.94/303.2	7.81/198.3	3.81/96.7	3.75/95.2	6.44/163.5
4	11.94/303.2	7.81/198.3	4.19/106.4	4.13/104.95	6.81/172.9

AJA200 Angle Adapter



Dimensions in Inches/Millimeters				
A	B	C	D	E
8.0/203.2	7.0/177.8	8.0/203.2	7.0/177.8	6.0/152.4

© September 2010

Powertite® Series Pin and Sleeve Plugs, Connectors and Receptacles

Applications

- Designed to supply power to portable or fixed electrical equipment such as motor generator units, welders, pumps, compressors, cellular relay stations, and similar apparatus.
- Ideal for use on shipping docks, ports, and other “ship to shore” applications.
- Suitable for use in locations where a weatherproof enclosure is required.
- Rough usage construction.




30 and 60 Amp



100 and 150 Amp



200 Amp



400 Amp

Features

- Available in 30, 60, 100, 150, 200, and 400 Amp units.
- Available in two grounding styles: Style 1 (shell only) and Style 2 (shell and extra pole).
- Neoprene bushing compressed by cable collar prevents entrance of water. Bushing is highly resistant to hydrocarbon deterioration and is self-extinguishing.
- Locking screw and slot prevents plug cable collar from “backing off.”
- Contacts exert constant pressure along entire contact surface and provide electrical continuity.
- Suitable for use from -40 °F/-40 °C to 225 °F/107 °C.
- Insulating blocks provide greatest dielectric and mechanical strength and lowest arc tracking.
- Positive polarization: only plugs and receptacles of same style, number of poles and ampere rating can be used together.
- Circuit breaking: in 30, 60, 100, and 200 Amp units, any arcing created as line and load terminals disengage is safely confined deep within terminal cavities. Plugs may be withdrawn in an emergency under full rated loads without separate disconnect switches (400 Amp plug is for disconnecting use only; not for current rupturing).
- 30, 60, 100, and 150 Amp Powertite® plugs also suitable for classified locations when used with Appleton EBR, EBRH, JBR, MD2SR, or DBR explosion-proof interlocking receptacles.
- Controlled length contacts ensure that ground makes first and breaks last for added safety.

Standard Materials

- Plug, receptacle, connector and mounting box housings: copperfree (4/10 of 1% max.) aluminum
- Insulating blocks: glass filled polyester

Standard Finishes

- Aluminum plug, receptacle, connector and mounting box housings: epoxy powder coat
- Insulating blocks and contacts: natural finish

Options

- See Illustrated Options

Certifications and Compliances

- UL Standard: UL 1682, UL 1686, UL 50E
- UL Listed: E145916, E145917
- CSA Standard: C22.2 No. 182.1
- CSA Certified: 065179
- NEMA 4X (30, 60, 100, 150, and 200 Amp)
- NEMA Configuration: FB11

Related Products

- For classified location plugs and receptacles, *see Plugs and Receptacles: Hazardous Location.*

Classified by UL and Certified by CSA for use in specific combinations with Crouse-Hinds Arktite. Arktite is a registered trademark of Cooper Crouse-Hinds.

© September 2010

Aluminum Mounting Boxes

For Powertite® 30, 60, 100, and 150 Amp Receptacles

30 Amp






Hub Size (Inches)	AEE	AERH	AERC	AERA
1/2	**AEE13**	**AERH13**	**AERC13**	**AERA13**
3/4	**AEE23**	**AERH23**	**AERC23**	**AERA23**
1	**AEE33**	**AERH33**	**AERC33**	**AERA33**

60 and 100 Amp






Hub Size (Inches)	AEE	AERH	AERC	AERA
1	**AEE36**	**AERH36**	**AERC36**	**AERA36**
1-1/4	**AEE46**	**AERH46**	**AERC46**	**AERA46**
1-1/2	**AEE56**	**AERH56**	**AERC56**	**AERA56**

60, 100, and 150 Amp




Hub Size (Inches)	AJA Back Box and Adapter *	Angle Adapter Only
1	**AJA310**	**AJA100**
1-1/4	**AJA410**	
1-1/2	**AJA510**	
2	**AJA610**	

Replacement Receptacle Mounting Gasket

Amp	Back Box Type	Part Number
30	AEE, AERH, AERC, AERA	**69060871000**
60, 100	AEE, AERH, AERC, AERA	**69060567000**
60, 100, 150	AJA	**69009497000**


** Feed-Thru box furnished with one close-up plug in bottom recessed hub.*

© September 2010

Powertite® 30, 60, 100, and 150 Amp Mounting Box Dimensions


600 Vac, 250 Vdc, 50-400 Hz

AJA Mounting Boxes

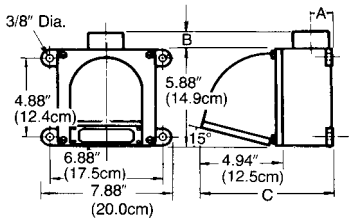

Amp	Hub Size (Inches)	Dimensions in Inches/Millimeters A	B †	C
60, 100 and 150	1	1.13/28.7	0.56/14.2	8.0/203.2
	1-1/4	1.13/28.7	0.56/14.2	8.0/203.2
	1-1/2	1.50/38.1	0.56/14.2	8.0/203.2
	2	1.50/38.1	0.56/14.2	8.0/203.2

AJA100 Angle Adapter

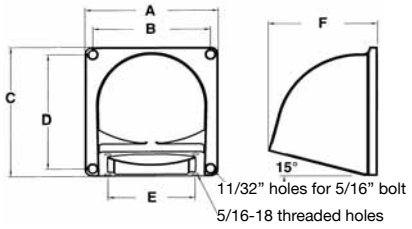

Dimensions in Inches/Millimeters A	B	C	D	E	F
5.87/149.0	5.18/131.5	5.87/149.0	5.18/131.5	3.50/88.9	4.81/122.1


† AJA has two hubs. Close-up plug furnished in bottom recessed hub.

© January 2011

Powertite® 30, 60, 100, and 150 Amp Mounting Box Dimensions


600 Vac, 250 Vdc, 50-400 Hz

AERA *, AERC ‡ and AERH Mounting Boxes

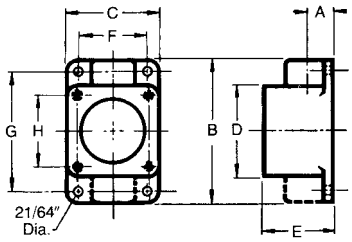

Amp	Hub Size (Inches)	Dimensions in Inches/Millimeters								
		A *	B ‡	C	D	E	F	G	H	J
30	1/2	0.69/17.5	5.31/134.8	3.38/85.8	3.38/85.8	2.50/63.5	2.63/66.8	4.56/115.8	2.72/69.0	0.94/23.8
30	3/4	0.75/19.0	5.31/134.8	3.38/85.8	3.38/85.8	2.50/63.5	2.63/66.8	4.56/115.8	2.72/69.0	0.94/23.8
30	1	0.81/20.5	5.31/134.8	3.38/85.8	3.38/8.6	2.50/63.5	2.63/66.8	4.56/115.8	2.72/69.0	0.94/23.8
60	1	0.81/20.5	6.50/165.1	4.25/107.9	4.25/107.9	3.13/79.5	3.50/88.9	5.88/149.3	3.50/8.9	1.38/35.0
60	1-1/4	0.94/23.8	6.50/165.1	4.25/107.9	4.25/107.9	3.13/79.5	3.50/88.9	5.88/149.3	3.50/88.9	1.38/35.0
60	1-1/2	1.00/25.4	6.50/165.1	4.25/107.9	4.25/107.9	3.13/79.5	3.50/88.9	5.88/149.3	3.50/88.9	1.38/35.0

AEE Mounting Box

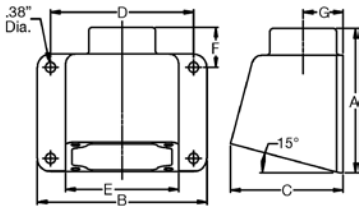

Amp	Hub Size (Inches)	Dimensions in Inches/Millimeters						
		A	B	C	D	E	F	G
30	1/2, 3/4, 1	4.12/104.6	5.00/127.0	3.33/84.5	4.25/107.9	3.38/85.8	1.18/29.9	1.10/27.9
60	1, 1-1/4, 1-1/2	5.41/137.4	6.38/162.0	4.23/107.4	5.38/136.6	4.25/107.9	1.50/38.1	1.50/38.1

** Dimension "A" for AERA only.*
‡ Dimension "B" for AERC only.

© September 2010

Powertite® 200 and 400 Amp Mounting Boxes and Replacement Interiors

600 Vac, 250 Vdc, 50-400 Hz.

200 Amp Mounting Boxes and Angle Adapter






Hub Size (Inches)	AJB	AJA	AJAC (Feed–Thru)	AJA200 (Angle Adapter Only)
1-1/2 NPT	—	**AJA520**	—	**AJA200**
2 NPT	**AJB620**	**AJA620**	—	**AJA200**
2-1/2 NPT	—	**AJA720**	**AJAC720**	**AJA200**
2-3/8 (Slip Hole)	**AJB238**	—	—	—

400 Amp Mounting Box and Angle Adapter




Hub Size (Inches)	AJAC *	AJA400 (Angle Adapter Only)
4	**AJAC400**	**AJA400**

200 Amp Interiors †






Grounding Style	Wire/Pole	Receptacle	Plug	Receptacle	Plug
Style 1 (Shell Only)	3W, 3P	**ARI20033**	**API20033**	—	—
	4W, 4P	**ARI20044**	**API20044**	—	—
Style 2 (Shell and Extra Pole)	2W, 3P	—	—	**ARI20023**	**API20023**
	3W, 4P	—	—	**ARI20034**	**API20034**

400 Amp Interiors †






Wire Recess Dia. (Inches)	Grounding Style	Wire/Pole	Receptacle	Plug	Receptacle	Plug
.84	Style 1 (Shell Only)	3W, 3P	**ARI40033**	**API40033**	—	—
		4W, 4P	**ARI40044**	**API40044**	—	—
	Style 2 (Shell and Extra Pole)	2W, 3P	—	—	**ARI40023**	**API40023**
		3W, 4P	—	—	**ARI40034**	**API40034**
1.25	Style 1 (Shell Only)	3W, 3P	**ARI40133**	**API40133**	—	—
		4W, 4P	**ARI40144**	**API40144**	—	—
	Style 2 (Shell and Extra Pole)	2W, 3P	—	—	**ARI40123**	**API40123**
		3W, 4P	—	—	**ARI40134**	**API40134**

** Has feed-thru 4" tapped openings. Supplied with one 4" to 3" reducer and one 4" close-up plug.*


† Pins and sleeves are not sold separately.

© September 2010

Powertite® 200 Amp Connector, Plug and Adapter Dimensions

600 Vac, 250 Vdc, 50-400 Hz.


Connector Body



Back View Side View

	Dimensions in Inches/Millimeters		
No. Poles	A	B	C
3	13.00/330.2	4.19/106.4	5.38/136.6
4	13.00/330.2	4.56/115.8	5.75/146.0


Plug



Back View Side View

	Dimensions in Inches/Millimeters				
No. Poles	A	B	C	D	E
3	11.94/303.2	7.81/198.3	3.81/96.7	3.75/95.2	6.44/163.5
4	11.94/303.2	7.81/198.3	4.19/106.4	4.13/104.95	6.81/172.9

AJA200 Angle Adapter



Dimensions in Inches/Millimeters				
A	B	C	D	E
8.0/203.2	7.0/177.8	8.0/203.2	7.0/177.8	6.0/152.4

© September 2010