Air King Ventilation Products®


SPECIFICATIONS

AS50

EXHAUST FAN

HVI® 2100 CERTIFIED

50 CFM/3.0 Sones @ 0.10" SP.

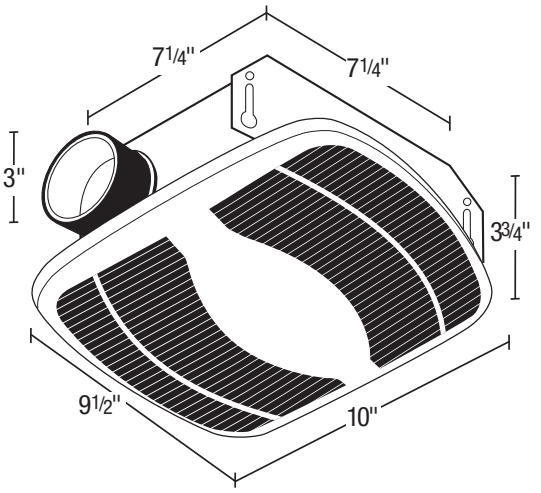

Acceptable for use over tub or shower when installed in a GFCI protected branch circuit.

- **Grill**
  White, polymeric grill secured in place with torsion springs; easily removed if necessary, dimensions - 10" x 9 1/2".
- **Blower Wheel**
  One piece polymeric wheel, 4 1/2" diameter, 1" wide, with 10 fins.
- **Motor**
  Single coil plug-in, two pole motor, life time lubrication, thermally protected. Rated 120 volts, 60 hz. Rated for continuous use.
- **Fan Housing**
  23 gauge galvanized metal housing, dimensions 7 1/4" x 7 1/4" x 3 3/4", double metal thickness mounting tabs.
- **Duct Collar**
  Plastic collar for 3" duct connection, comes complete with built in non-metallic back draft damper for quiet operation.
- **Ventilating Area**
  For bathrooms up to 50 sq. ft. for other rooms up to 60 sq. ft.
- **Unit Mounting**
  Designed to mount in ceilings or walls with at least 4" of clearance. The housing will mount through drywall thickness up to 3/4", with a rough-in opening of 7 1/2" x 7 1/2".
- **Single Pack Shipping Info**
  Box Dim: 10 3/4" x 10 1/8" x 4 3/4"
  UPC: 0-8316225311-8
  Shipping Weight: 4 1/2 lbs.

EXPANDED PERFORMANCE

	Static Pressure (inches of w.g.)							*Sones @ .1 SP*	*Fan Speed RPM*	*Maximum Fan Watts*	*Amps*
	0	0.05	0.1	0.125	0.15	0.2	0.25				
Air Flow - CFM	55	53	50	49	47	44	39	3.0	2125	48	0.9

PROJECT		**ARCHITECT**	
LOCATION		**ENGINEER**	
CONTRACTOR		**SUBMITTED BY**	**DATE**

FAN NUMBER	MODEL NUMBER	CFM	IN W.G.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS

c UL us

Air King: 820 Lincoln Avenue
West Chester, Pennsylvania 19380-4466
Tel: (610) 692-7400 • 877-304-3785
Fax: (610) 696-8048

Specifications subject to change without notice.

Updated 11-15

Air King Ventilation Products®


SPECIFICATIONS

AS50

EXHAUST FAN

HVI® 2100 CERTIFIED

50 CFM/3.0 Sones @ 0.10" SP.

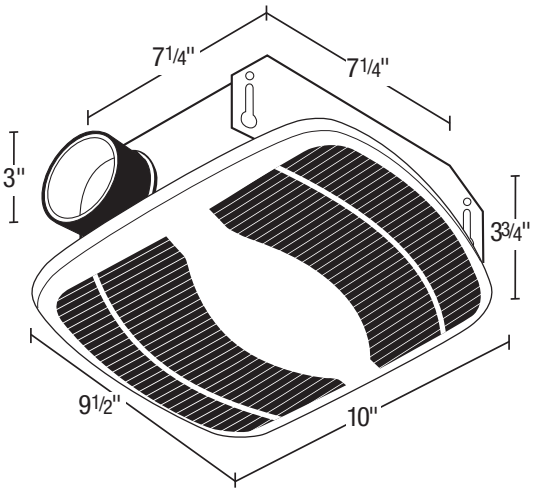

Acceptable for use over tub or shower when installed in a GFCI protected branch circuit.

- **Grill**
  White, polymeric grill secured in place with torsion springs; easily removed if necessary, dimensions - 10" x 9 1/2".
- **Blower Wheel**
  One piece polymeric wheel, 4 1/2" diameter, 1" wide, with 10 fins.
- **Motor**
  Single coil plug-in, two pole motor, life time lubrication, thermally protected. Rated 120 volts, 60 hz. Rated for continuous use.
- **Fan Housing**
  23 gauge galvanized metal housing, dimensions 7 1/4" x 7 1/4" x 3 3/4", double metal thickness mounting tabs.
- **Duct Collar**
  Plastic collar for 3" duct connection, comes complete with built in non-metallic back draft damper for quiet operation.
- **Ventilating Area**
  For bathrooms up to 50 sq. ft. for other rooms up to 60 sq. ft.
- **Unit Mounting**
  Designed to mount in ceilings or walls with at least 4" of clearance. The housing will mount through drywall thickness up to 3/4", with a rough-in opening of 7 1/2" x 7 1/2".
- **Single Pack Shipping Info**
  Box Dim: 10 3/4" x 10 1/8" x 4 3/4"
  UPC: 0-8316225311-8
  Shipping Weight: 4 1/2 lbs.

EXPANDED PERFORMANCE

	Static Pressure (inches of w.g.)							*Sones @ .1 SP*	*Fan Speed RPM*	*Maximum Fan Watts*	*Amps*
	0	0.05	0.1	0.125	0.15	0.2	0.25				
Air Flow - CFM	55	53	50	49	47	44	39	3.0	2125	48	0.9

PROJECT		**ARCHITECT**	
LOCATION		**ENGINEER**	
CONTRACTOR		**SUBMITTED BY**	**DATE**

FAN NUMBER	MODEL NUMBER	CFM	IN W.G.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS

c UL us

Air King: 820 Lincoln Avenue
West Chester, Pennsylvania 19380-4466
Tel: (610) 692-7400 • 877-304-3785
Fax: (610) 696-8048

Specifications subject to change without notice.

Updated 11-15