


# Metal Framing Channels

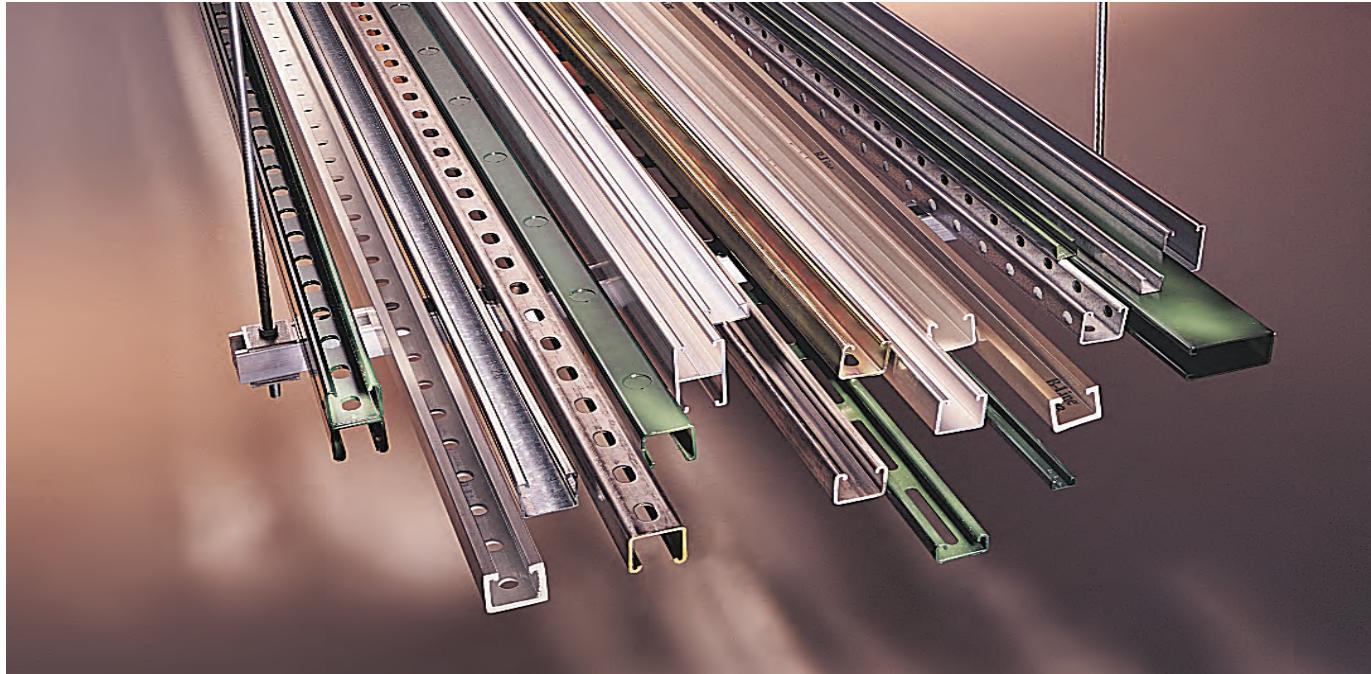

## Channel

Metal framing channel is cold formed on our modern rolling mills from 12 Ga. (2.6mm), 14 Ga. (1.9mm), and 16 Ga. (1.5mm) low carbon steel strips. A continuous slot with inturned lips provides the ability to make attachments at any point.

## Lengths & Tolerances

All channels excluding 'SH' style  $\pm 1/8"$  (3.2mm) on 10' (3.05m) and  $\pm 3/16"$  (4.76mm) on 20' (6.09m)

All 'SH' channels only  $\pm 1/4"$  (6.35mm) on 10' (3.05m) and  $\pm 1/2"$  (12.70mm) on 20' (6.09m)

Custom lengths are available upon request.

## Slots

Slotted series of channels offer full flexibility. A variety of pre-punched slot patterns eliminate the need for precise field measuring for hole locations. Slots offer wide adjustments in the alignment and bolt sizing.

## Holes

A variety of pre-punched  $9/16"$  (14.3 mm) diameter hole patterns are available in our channels. These hole patterns provide an economical alternative to costly field drilling required for many applications.

## Knockouts

When used with series B217-20 Closure Strips, knockout channels can be used to provide an economical U.L. listed surface raceway. Channels are furnished with  $7/8"$  (22.2 mm) knockouts on 6" (152 mm) centers, allowing for perfect fixture alignment on spans up to 20' (6.09 m).

## Materials & Finishes (Unless otherwise noted)

### Steel: Plain & Pre-galvanized

12 Ga. (2.6), 14 Ga. (1.9) and 16 Ga. (1.5)

Note: A minimum order may apply on special material and finishes.

### Design Load (Steel & Stainless Steel)

The design loads given for strut beam loads are based on a simple beam condition using an allowable stress of 25,000 psi. This allowable stress results in a safety factor

of 1.68. This is based upon virgin steel minimum yield strength of 33,000 psi cold worked during rolling to an average yield stress of 42,000 psi. For aluminum channel loading multiply steel loading by a factor of 0.38.

## Welding

Weld spacing is maintained between  $2\frac{1}{2}$  inches (63.5 mm) and 4 inches (101.6 mm) on center. Through high quality control testing of welded channels and continuous monitoring of welding equipment, we provide the most consistent combination channels available today.

## Metric

Metric dimensions are shown in parentheses. Unless noted, all metric dimensions are in millimeters.

Finish Code	Finish	Specification
PLN	Plain	ASTM A1011, 33,000 PSI min. yield
GRN	DURA GREEN™	
GLV	Pre-Galvanized	ASTM A653 33,000 PSI min. yield
HDG	Hot-Dipped Galvanized	ASTM A123
YZN	Yellow Zinc Chromate	ASTM B633 SC3 Type II
SS4	Stainless Steel Type 304	ASTM A240
SS6	Stainless Steel Type 316	ASTM A240
AL	Aluminum	Aluminum 6063-T6

## Selection Chart

### for Channels, Materials and Hole Patterns

Channel Type	Channel Dimensions		Material & Thickness *				Channel Hole Pattern **				
			Stainless Steel		SH	S	H17/8	TH	KO6		
	Height	Width	Steel	Alum.					9/16" diameter holes	9/16" diameter on 17/8" centers	
			1	2	3	4	9/16" x 1 1/8" slots on 2" centers	13/32" x 3" slots	9/16" diameter holes	9/16" diameter on 17/8" centers	7/8" diameter knockouts
B11	3 1/4" (82.5)	1 5/8" (41.3)	12 Ga.	.105	—	—	1	1	1	—	1
B12	2 7/16" (61.9)	1 5/8" (41.3)	12 Ga.	.105	—	—	1 2	1	1 2	—	1 2
B22	1 5/8" (41.3)	1 5/8" (41.3)	12 Ga.	.105	12 Ga.	12 Ga.	1 2 3 4	1 3	1 2 3 4	1	1 2
B24	1 5/8" (41.3)	1 5/8" (41.3)	14 Ga.	.080	14 Ga.	14 Ga.	1 2 3 4	1	1 2 3 4	—	1 2
B26	1 5/8" (41.3)	1 5/8" (41.3)	16 Ga.	—	—	—	1	1	1	—	1
B32	1 3/8" (34.9)	1 5/8" (41.3)	12 Ga.	—	12 Ga.	—	1 3	1	1 3	—	1
B42	1" (25.4)	1 5/8" (41.3)	12 Ga.	—	12 Ga.	—	1 3	1	1 3	—	1
B52	1 3/16" (20.6)	1 5/8" (41.3)	12 Ga.	—	12 Ga.	12 Ga.	1 3 4	1	1	—	1
B54	1 3/16" (20.6)	1 5/8" (41.3)	14 Ga.	.080	14 Ga.	14 Ga.	1 2 3 4	1	1 2 3 4	—	1 2
B56	1 3/16" (20.6)	1 5/8" (41.3)	16 Ga.	—	—	—	1	1	1	—	1
B62	1 3/16" (20.6)	1 3/16" (20.6)	18 Ga.	—	—	—	—	—	—	—	—
B72	1 3/32" (10.3)	1 3/16" (20.6)	18 Ga.	—	—	—	—	—	—	—	—

The selection has been prepared to provide a reference for available channel, materials and hole patterns. Material types available for various hole patterns are defined by numbers 1 thru 4.

Some stainless steel channels with hole patterns are available on special order only.

\*Metric equivalent for thicknesses shown in chart.

12 Ga. = 2.6 mm

18 Ga. = 1.2 mm

14 Ga. = 1.9 mm

.105 = 2.6 mm

16 Ga. = 1.5 mm

.080 = 2.0 mm

\*\* 1 - Steel

2 - Aluminum

3 - Type 304 Stainless Steel

4 - Type 316 Stainless Steel

Properties may vary due to commercial tolerances of the material.

Channel Part Numbering			
Example: B22 SH - 120 SS4			
Channel Type	Hole Patterns	Length	Material/Finish
B11	SH (pg. 74)	120	GRN
B12	S (pg. 74)	240	GLV
B22	H178 (pg. 74)		HDG
B24	TH (pg. 75)		PLN
B26	K06 (pg. 75)		YZN
B32	SHA (pg. 75)		SS4 (See page 222)
B42	S58 (pg. 76)		SS6 (See page 222)
B52	M (pg. 76)		AL (See pages 219-220)
B54	H25 (pg. 76)		
B56	Leave blank for no hole pattern		
B62 <sup>Δ</sup>			
B72 <sup>Δ</sup>	Δ Hole patterns are not available on these channel sizes		

Reference page 48 for general fitting and standard finish specifications.



# B22 Channel

## B22

- Thickness: 12 Gauge (2.6 mm)
- Standard lengths: 10' (3.05 m) & 20' (6.09 m)
- Standard finishes: Plain, DURA GREEN™, Pre-Galvanized, Hot-Dipped Galvanized, Stainless Steel Type 304 or 316, Aluminum
- Weight: 1.90 Lbs./Ft. (2.83 kg/m)


Note:

Aluminum loading, for B22 & B22A, can be determined by multiplying load data times a factor of 0.38

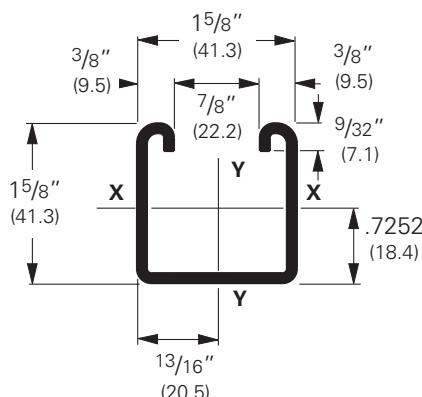


Section Properties			X - X Axis			Y - Y Axis		
Channel	Weight lbs./ft. kg/m	Areas of Section sq. in. cm <sup>2</sup>	Moment of Inertia (I) in. <sup>4</sup> cm <sup>4</sup>	Section Modulus (S) in. <sup>3</sup> cm <sup>3</sup>	Radius of Gyration (r) in. cm	Moment of Inertia (I) in. <sup>4</sup> cm <sup>4</sup>	Section Modulus (S) in. <sup>3</sup> cm <sup>3</sup>	Radius of Gyration (r) in. cm
B22	1.910 (2.84)	.562 (3.62)	.1912 (7.96)	.2125 (3.48)	.583 (1.48)	.2399 (9.99)	.2953 (4.84)	.653 (1.66)
B22A	3.820 (5.69)	1.124 (7.25)	.9732 (40.51)	.5989 (9.81)	.931 (2.36)	.4798 (19.97)	.5905 (9.68)	.653 (1.66)
B22X	6.649 (9.89)	1.956 (12.62)	4.1484(172.67)	1.7019 (27.89)	1.456 (3.70)	1.1023(45.88)	1.2027(19.71)	.751 (1.91)

Calculations of section properties are based on metal thicknesses as determined by the AISI Cold-Formed Steel Design Manual.

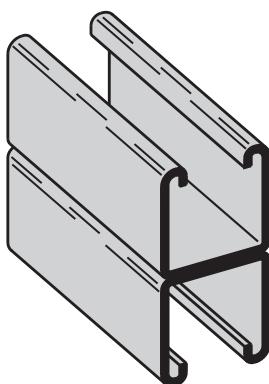

## B22A

Wt. 3.80 Lbs./Ft. (5.65 kg/m)

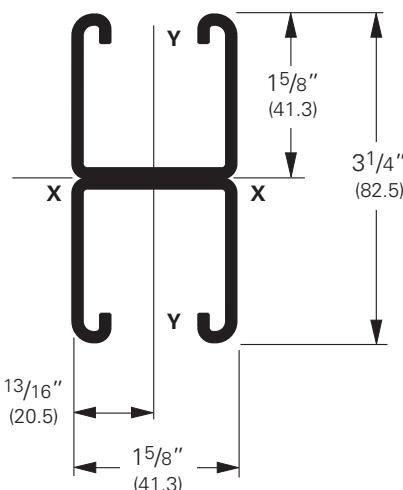

# B22 Beam Loading Data

## Beam Loading

Beam Span In. mm	Channel Style	Uniform Load and Deflection				Uniform Load @ Deflection =			
		Lbs.	kN	In.	mm	1/240 Span Lbs.	kN	1/360 Span Lbs.	kN
12 (305)	<b>B22</b>	2610	(11.61)	.014	(.35)	2610	(11.61)	2610	(11.61)
	<b>B22A</b>	2610*	(11.61)	.002	(.05)	2610*	(11.61)	2610*	(11.61)
	<b>B22X</b>	5790*	(25.75)	.001	(.02)	5790*	(25.75)	5790*	(25.75)
18 (457)	<b>B22</b>	2269	(10.09)	.031	(.79)	2269	(10.09)	2269	(10.09)
	<b>B22A</b>	2610*	(11.61)	.007	(.18)	2610*	(11.61)	2610*	(11.61)
	<b>B22X</b>	5790*	(25.75)	.003	(.07)	5790*	(25.75)	5790*	(25.75)
24 (609)	<b>B22</b>	1702	(7.57)	.056	(1.42)	1702	(7.57)	1702	(7.57)
	<b>B22A</b>	2610*	(11.61)	.017	(.43)	2610*	(11.61)	2610*	(11.61)
	<b>B22X</b>	5790*	(25.75)	.008	(.20)	5790*	(25.75)	5790*	(25.75)
30 (762)	<b>B22</b>	1361	(6.05)	.087	(2.21)	1361	(6.05)	1294	(5.75)
	<b>B22A</b>	2610*	(11.61)	.033	(.84)	2610*	(11.61)	2610*	(11.61)
	<b>B22X</b>	5790*	(25.75)	.017	(.73)	5790*	(25.75)	5790*	(25.75)
36 (914)	<b>B22</b>	1135	(5.05)	.126	(3.20)	1135	(5.05)	899	(4.00)
	<b>B22A</b>	2610*	(11.61)	.057	(1.45)	2610*	(11.61)	2610*	(11.61)
	<b>B22X</b>	5790*	(25.75)	.029	(.73)	5790*	(25.75)	5790*	(25.75)
42 (1067)	<b>B22</b>	972	(4.32)	.172	(4.37)	972	(4.32)	660	(2.93)
	<b>B22A</b>	2610*	(11.61)	.091	(2.31)	2610*	(11.61)	2610*	(11.61)
	<b>B22X</b>	5790*	(25.75)	.046	(1.17)	5790*	(25.75)	5790*	(25.75)
48 (1219)	<b>B22</b>	851	(3.78)	.224	(5.69)	758	(3.37)	505	(2.24)
	<b>B22A</b>	2405	(10.70)	.125	(3.17)	2405	(10.70)	2405	(10.70)
	<b>B22X</b>	5790*	(25.75)	.068	(1.73)	5790*	(25.75)	5790*	(25.75)
54 (1371)	<b>B22</b>	756	(3.36)	.284	(7.21)	599	(2.66)	399	(1.77)
	<b>B22A</b>	2138	(9.51)	.158	(4.01)	2138	(9.51)	2024	(9.00)
	<b>B22X</b>	5790*	(25.75)	.097	(2.46)	5790*	(25.75)	5790*	(25.75)
60 (1524)	<b>B22</b>	681	(3.03)	.351	(8.91)	485	(2.16)	323	(1.44)
	<b>B22A</b>	1924	(8.56)	.195	(4.95)	1924	(8.56)	1640	(7.29)
	<b>B22X</b>	5645	(25.11)	.130	(3.30)	5645	(25.11)	5645	(25.11)
66 (1676)	<b>B22</b>	619	(2.75)	.424	(10.77)	401	(1.78)	267	(1.19)
	<b>B22A</b>	1749	(7.78)	.236	(5.99)	1749	(7.78)	1355	(6.03)
	<b>B22X</b>	5132	(22.83)	.158	(4.01)	5132	(22.83)	5132	(22.83)
72 (1829)	<b>B22</b>	567	(2.52)	.505	(12.83)	337	(1.50)	225	(1.00)
	<b>B22A</b>	1603	(7.13)	.281	(7.14)	1603	(7.13)	1139	(5.06)
	<b>B22X</b>	4704	(20.92)	.188	(4.77)	4704	(20.92)	4704	(20.92)
78 (1981)	<b>B22</b>	524	(2.33)	.593	(15.06)	287	(1.27)	191	(0.85)
	<b>B22A</b>	1480	(6.58)	.330	(8.38)	1455	(6.47)	970	(4.31)
	<b>B22X</b>	4342	(19.31)	.220	(5.59)	4342	(19.31)	4270	(18.99)
84 (2133)	<b>B22</b>	486	(2.16)	.687	(17.45)	248	(1.10)	165	(0.73)
	<b>B22A</b>	1374	(6.11)	.383	(9.73)	1255	(5.58)	837	(3.72)
	<b>B22X</b>	4032	(17.93)	.255	(6.48)	4032	(17.93)	3682	(16.38)
90 (2286)	<b>B22</b>	454	(2.02)	.789	(20.04)	216	(0.96)	144	(0.64)
	<b>B22A</b>	1283	(5.71)	.440	(11.17)	1093	(4.86)	729	(3.24)
	<b>B22X</b>	3763	(16.74)	.293	(7.44)	3763	(16.74)	3207	(14.26)
96 (2438)	<b>B22</b>	425	(1.89)	.898	(22.81)	190	(0.84)	126	(0.56)
	<b>B22A</b>	1202	(5.35)	.500	(12.70)	961	(4.27)	640	(2.85)
	<b>B22X</b>	3528	(15.69)	.334	(8.48)	3528	(15.69)	2819	(12.54)
102 (2591)	<b>B22</b>	400	(1.78)	1.013	(25.73)	168	(0.75)	112	(0.50)
	<b>B22A</b>	1132	(5.03)	.565	(14.35)	851	(3.78)	567	(2.52)
	<b>B22X</b>	3320	(14.77)	.377	(9.57)	3320	(14.77)	2497	(11.11)
108 (2743)	<b>B22</b>	378	(1.68)	1.136	(28.85)	150	(0.67)	100	(0.44)
	<b>B22A</b>	1069	(4.75)	.633	(16.08)	759	(3.37)	506	(2.25)
	<b>B22X</b>	3136	(13.95)	.422	(10.72)	3136	(13.95)	2227	(9.90)
114 (2895)	<b>B22</b>	358	(1.59)	1.266	(32.15)	134	(0.59)	90	(0.40)
	<b>B22A</b>	1013	(4.50)	.706	(17.93)	681	(3.03)	454	(2.02)
	<b>B22X</b>	2971	(13.21)	.471	(11.96)	2971	(13.21)	1999	(8.89)
120 (3048)	<b>B22</b>	340	(1.51)	1.403	(35.63)	121	(0.54)	81	(0.36)
	<b>B22A</b>	962	(4.28)	.782	(19.86)	615	(2.73)	410	(1.82)
	<b>B22X</b>	2822	(12.55)	.521	(13.23)	2706	(12.04)	1804	(8.02)

Based on simple beam condition using an allowable design stress of 25,000 psi (172 MPa) in accordance with MFMA, with adequate lateral bracing (see page 12 for further explanation). Actual yield point of cold rolled steel is 42,000 psi. To determine concentrated load capacity at mid span, multiply uniform load by 0.5 and corresponding deflection by 0.8. \*Failure determined by weld shear.


# B22 Column Loading Data

## Column Loading

Unbraced Height In. mm	Channel Style	Max. Column Loading K = .80 Loaded@ C.G.		Max. Column Loading (Loaded @ C.G.)		K = .65		K = 1.0		K = 1.2		
		Lbs.	kN	Lbs.	kN	Lbs.	kN	Lbs.	kN	Lbs.	kN	
		<b>B22</b>	10454 (46.50)	4276 (19.12)	10598 (47.14)	10222 (45.47)	9950 (44.26)	<b>B22A</b>	21625 (96.19)	7002 (31.14)	21677 (96.42)	21433 (95.34)
12 (305)	<b>B22X</b>	46948 (208.83)	18975 (84.40)	47061 (209.34)	46761 (208.00)	46531 (206.98)						
	<b>B22</b>	9950 (44.26)	4153 (18.47)	10253 (45.62)	9481 (42.17)	8955 (39.83)	<b>B22A</b> <th>21433 (95.34)</th> <td>6959 (30.95)</td> <td>21551 (95.86)</td> <td>21239 (94.47)</td> <td>21001 (93.42)</td>	21433 (95.34)	6959 (30.95)	21551 (95.86)	21239 (94.47)	21001 (93.42)
	<b>B22X</b>	46531 (206.98)	18859 (83.90)	46787 (208.12)	46110 (205.11)	45593 (202.81)						
18 (457)	<b>B22</b>	9311 (41.42)	3993 (17.76)	9801 (43.60)	8582 (38.17)	7801 (34.70)	<b>B22A</b> <th>21164 (94.14)</th> <td>6898 (30.68)</td> <td>21373 (95.07)</td> <td>20819 (92.61)</td> <td>20397 (90.73)</td>	21164 (94.14)	6898 (30.68)	21373 (95.07)	20819 (92.61)	20397 (90.73)
	<b>B22X</b>	45947 (204.38)	18693 (84.44)	46401 (206.40)	45198 (201.05)	44282 (196.97)						
	<b>B22</b>	8582 (38.17)	3802 (16.91)	9268 (41.22)	7601 (33.81)	6595 (29.33)	<b>B22A</b> <th>20819 (92.61)</th> <td>6821 (30.34)</td> <td>21145 (94.06)</td> <td>20279 (90.20)</td> <td>19619 (87.27)</td>	20819 (92.61)	6821 (30.34)	21145 (94.06)	20279 (90.20)	19619 (87.27)
24 (609)	<b>B22X</b>	45198 (201.05)	18485 (82.22)	45906 (204.20)	44026 (195.84)	42593 (189.46)						
	<b>B22</b>	7801 (34.70)	3589 (15.96)	8676 (38.59)	6595 (28.33)	5392 (23.98)	<b>B22A</b> <td>20397 (90.73)</td> <td>6728 (29.93)</td> <td>20866 (92.81)</td> <td>19619 (87.27)</td> <td>18669 (83.04)</td>	20397 (90.73)	6728 (29.93)	20866 (92.81)	19619 (87.27)	18669 (83.04)
	<b>B22X</b>	44282 (196.97)	18233 (81.10)	45300 (201.50)	42593 (189.46)	40530 (180.28)						
30 (762)	<b>B22</b>	6998 (31.13)	3360 (14.94)	8048 (35.80)	5595 (24.89)	4444 (19.77)	<b>B22A</b> <td>19898 (88.51)</td> <td>6620 (29.45)</td> <td>20537 (91.33)</td> <td>18840 (83.80)</td> <td>17546 (78.05)</td>	19898 (88.51)	6620 (29.45)	20537 (91.33)	18840 (83.80)	17546 (78.05)
	<b>B22X</b>	43198 (192.15)	17940 (79.80)	44586 (198.33)	40901 (181.94)	38092 (169.44)						
	<b>B22</b>	6193 (27.55)	3118 (13.87)	7401 (32.92)	4718 (20.99)	3791 (16.86)	<b>B22A</b> <td>19322 (85.95)</td> <td>6496 (28.89)</td> <td>20157 (89.66)</td> <td>17940 (79.80)</td> <td>16251 (72.29)</td>	19322 (85.95)	6496 (28.89)	20157 (89.66)	17940 (79.80)	16251 (72.29)
42 (1067)	<b>B22X</b>	41948 (186.59)	17604 (78.30)	43761 (194.57)	38948 (173.25)	35281 (156.94)						
	<b>B22</b>	5392 (23.98)	2864 (12.74)	6746 (30.01)	4090 (18.19)	3310 (14.72)	<b>B22A</b> <td>18669 (83.04)</td> <td>6263 (27.86)</td> <td>19276 (87.74)</td> <td>16920 (75.26)</td> <td>14782 (65.75)</td>	18669 (83.04)	6263 (27.86)	19276 (87.74)	16920 (75.26)	14782 (65.75)
	<b>B22X</b>	40530 (180.28)	16973 (75.50)	42825 (190.49)	36733 (163.39)	32092 (142.75)						
48 (1219)	<b>B22</b>	4718 (20.99)	2631 (11.70)	6093 (27.10)	3616 (16.08)	2936 (13.06)	<b>B22A</b> <td>17940 (79.80)</td> <td>5340 (23.75)</td> <td>19244 (85.60)</td> <td>15781 (70.20)</td> <td>13141 (58.45)</td>	17940 (79.80)	5340 (23.75)	19244 (85.60)	15781 (70.20)	13141 (58.45)
	<b>B22X</b>	38948 (173.25)	14471 (64.37)	41779 (185.84)	34260 (152.39)	28529 (126.90)						
	<b>B22</b>	4202 (18.69)	2434 (10.83)	5441 (24.20)	3242 (14.42)	2634 (11.71)	<b>B22A</b> <td>17134 (76.21)</td> <td>4587 (20.40)</td> <td>18712 (83.23)</td> <td>14521 (64.59)</td> <td>11328 (50.39)</td>	17134 (76.21)	4587 (20.40)	18712 (83.23)	14521 (64.59)	11328 (50.39)
54 (1371)	<b>B22X</b>	37198 (165.46)	12431 (55.29)	40624 (180.70)	31525 (140.23)	24593 (109.39)						
	<b>B22</b>	3791 (16.86)	2264 (10.07)	4869 (21.66)	2936 (13.06)	2381 (10.59)	<b>B22A</b> <td>16251 (72.29)</td> <td>3968 (17.65)</td> <td>18129 (80.64)</td> <td>13141 (58.45)</td> <td>9524 (42.36)</td>	16251 (72.29)	3968 (17.65)	18129 (80.64)	13141 (58.45)	9524 (42.36)
	<b>B22X</b>	35281 (156.94)	10753 (47.83)	39358 (175.07)	28529 (126.90)	20676 (91.97)						
60 (1524)	<b>B22</b>	3456 (15.37)	2116 (9.41)	4412 (19.62)	2680 (11.92)	2166 (9.63)	<b>B22A</b> <td>15291 (68.02)</td> <td>3456 (15.37)</td> <td>17496 (77.82)</td> <td>11642 (51.78)</td> <td>8115 (36.10)</td>	15291 (68.02)	3456 (15.37)	17496 (77.82)	11642 (51.78)	8115 (36.10)
	<b>B22X</b>	33197 (147.67)	9366 (41.66)	37984 (168.96)	25275 (112.43)	17617 (78.36)						
	<b>B22</b>	3176 (14.13)	1984 (8.82)	4037 (17.96)	2461 (10.95)	1980 (8.81)	<b>B22A</b> <td>14255 (63.41)</td> <td>3028 (13.47)</td> <td>16812 (74.78)</td> <td>10076 (44.82)</td> <td>6998 (31.13)</td>	14255 (63.41)	3028 (13.47)	16812 (74.78)	10076 (44.82)	6998 (31.13)
66 (1676)	<b>B22X</b>	30947 (137.66)	8206 (36.50)	36499 (162.35)	21875 (97.30)	15192 (67.58)						
	<b>B22</b>	2936 (13.06)	1867 (8.30)	3724 (16.56)	2270 (10.10)	1816 (8.08)	<b>B22A</b> <td>13141 (58.45)</td> <td>2667 (11.86)</td> <td>16077 (71.51)</td> <td>8778 (39.04)</td> <td>6096 (27.11)</td>	13141 (58.45)	2667 (11.86)	16077 (71.51)	8778 (39.04)	6096 (27.11)
	<b>B22X</b>	28529 (126.90)	7227 (32.15)	34903 (155.25)	19057 (84.77)	13234 (58.87)						
78 (1981)	<b>B22</b>	2728 (16.58)	1761 (7.83)	3456 (15.37)	2101 (9.34)	1671 (7.43)	<b>B22A</b> <td>11951 (53.16)</td> <td>2359 (10.49)</td> <td>15291 (68.02)</td> <td>7715 (34.32)</td> <td>5357 (23.83)</td>	11951 (53.16)	2359 (10.49)	15291 (68.02)	7715 (34.32)	5357 (23.83)
	<b>B22X</b>	25945 (115.41)	6393 (28.44)	33197 (147.67)	16749 (74.50)	11630 (51.73)						
	<b>B22</b>	2545 (11.32)	1664 (7.40)	3225 (14.34)	1951 (8.68)	1542** (6.34)	<b>B22A</b> <td>10678 (47.50)</td> <td>2093 (9.31)</td> <td>14455 (64.30)</td> <td>6834 (30.40)</td> <td>4746 (21.11)</td>	10678 (47.50)	2093 (9.31)	14455 (64.30)	6834 (30.40)	4746 (21.11)
84 (2133)	<b>B22X</b>	23182 (103.12)	5672 (25.23)	31382 (139.59)	14836 (65.99)	10303 (45.83)						
	<b>B22</b>	2381 (10.59)	1575 (7.00)	3022 (13.44)	1816 (8.08)	1426** (68.60)	<b>B22A</b> <td>9524 (42.36)</td> <td>1867 (8.30)</td> <td>13568 (60.35)</td> <td>6096 (27.11)</td> <td>4233 (18.83)</td>	9524 (42.36)	1867 (8.30)	13568 (60.35)	6096 (27.11)	4233 (18.83)
	<b>B22X</b>	20676 (91.97)	5059 (22.50)	29456 (131.03)	13234 (58.87)	9190 (40.88)						
90 (2286)	<b>B22</b>	2234 (9.94)	1494 (6.64)	2842 (12.64)	1694 (7.53)	1322** (5.88)	<b>B22A</b> <td>8548 (38.02)</td> <td>1675 (7.45)</td> <td>12630 (56.18)</td> <td>5471 (24.33)</td> <td>3799** (16.90)</td>	8548 (38.02)	1675 (7.45)	12630 (56.18)	5471 (24.33)	3799** (16.90)
	<b>B22X</b>	18558 (82.55)	4539 (20.19)	27420 (121.97)	11877 (52.83)	8247 (36.68)						
	<b>B22</b>	2101 (9.34)	1418 (6.31)	2680 (11.92)	1583** (7.04)	1228** (5.46)	<b>B22A</b> <td>7715 (34.32)</td> <td>1512 (6.72)</td> <td>11642 (51.78)</td> <td>4937 (21.96)</td> <td>3429** (15.25)</td>	7715 (34.32)	1512 (6.72)	11642 (51.78)	4937 (21.96)	3429** (15.25)
102 (2591)	<b>B22X</b>	16749 (74.50)	4097 (18.22)	25275 (112.43)	10718 (47.67)	7444 (33.11)						
	<b>B22</b>											
	<b>B22A</b>											
108 (2743)	<b>B22X</b>											
	<b>B22</b>											
	<b>B22A</b>											
114 (2895)	<b>B22X</b>											
	<b>B22</b>											
	<b>B22A</b>											
120 (3048)	<b>B22X</b>											
	<b>B22</b>											
	<b>B22A</b>											

\*\*Where the slenderness ratio  $\frac{KL}{r}$  exceeds 200, and K = end fixity factor, L = actual length and r = radius of gyration.

# Metal Framing Channels

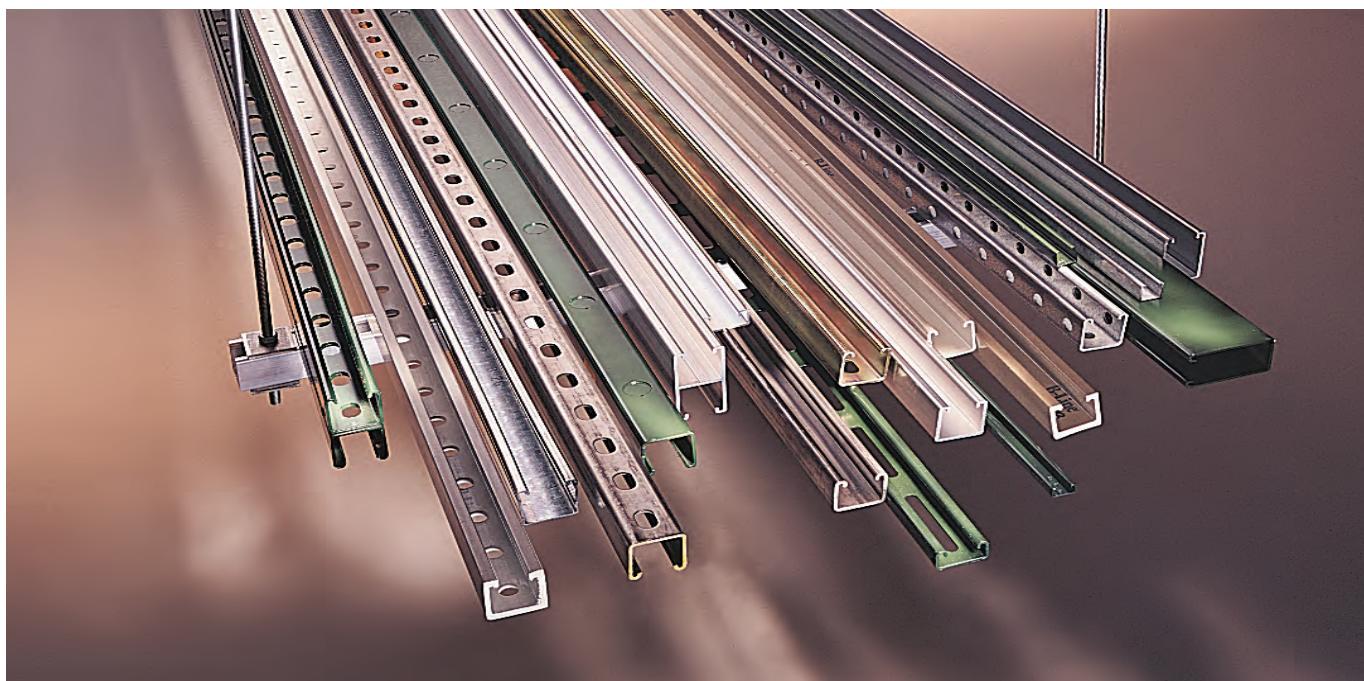

## Channel

Metal framing channel is cold formed on our modern rolling mills from 12 Ga. (2.6mm), 14 Ga. (1.9mm), and 16 Ga. (1.5mm) low carbon steel strips. A continuous slot with inturned lips provides the ability to make attachments at any point.

## Lengths & Tolerances

All channels excluding 'SH' style  $\pm 1/8"$  (3.2mm) on 10' (3.05m) and  $\pm 3/16"$  (4.76mm) on 20' (6.09m)

All 'SH' channels only  $\pm 1/4"$  (6.35mm) on 10' (3.05m) and  $\pm 1/2"$  (12.70mm) on 20' (6.09m)

Custom lengths are available upon request.

## Slots

Slotted series of channels offer full flexibility. A variety of pre-punched slot patterns eliminate the need for precise field measuring for hole locations. Slots offer wide adjustments in the alignment and bolt sizing.

## Holes

A variety of pre-punched  $9/16"$  (14.3 mm) diameter hole patterns are available in our channels. These hole patterns provide an economical alternative to costly field drilling required for many applications.

## Knockouts

When used with series B217-20 Closure Strips, knockout channels can be used to provide an economical U.L. listed surface raceway. Channels are furnished with  $7/8"$  (22.2 mm) knockouts on 6" (152 mm) centers, allowing for perfect fixture alignment on spans up to 20' (6.09 m).

## Materials & Finishes (Unless otherwise noted)

### Steel: Plain & Pre-galvanized

12 Ga. (2.6), 14 Ga. (1.9) and 16 Ga. (1.5)

Note: A minimum order may apply on special material and finishes.

### Design Load (Steel & Stainless Steel)

The design loads given for strut beam loads are based on a simple beam condition using an allowable stress of 25,000 psi. This allowable stress results in a safety factor

of 1.68. This is based upon virgin steel minimum yield strength of 33,000 psi cold worked during rolling to an average yield stress of 42,000 psi. For aluminum channel loading multiply steel loading by a factor of 0.38.

## Welding

Weld spacing is maintained between  $2\frac{1}{2}$  inches (63.5 mm) and 4 inches (101.6 mm) on center. Through high quality control testing of welded channels and continuous monitoring of welding equipment, we provide the most consistent combination channels available today.

## Metric

Metric dimensions are shown in parentheses. Unless noted, all metric dimensions are in millimeters.

Finish Code	Finish	Specification
PLN	Plain	ASTM A1011, 33,000 PSI min. yield
GRN	DURA GREEN™	
GLV	Pre-Galvanized	ASTM A653 33,000 PSI min. yield
HDG	Hot-Dipped Galvanized	ASTM A123
YZN	Yellow Zinc Chromate	ASTM B633 SC3 Type II
SS4	Stainless Steel Type 304	ASTM A240
SS6	Stainless Steel Type 316	ASTM A240
AL	Aluminum	Aluminum 6063-T6

## Selection Chart

### for Channels, Materials and Hole Patterns

Channel Type	Channel Dimensions		Material & Thickness *				Channel Hole Pattern **				
			Stainless Steel		SH	S	H17/8	TH	KO6		
	Height	Width	Steel	Alum.					9/16" diameter holes	9/16" diameter on 17/8" centers	
			1	2	3	4	9/16" x 1 1/8" slots on 2" centers	13/32" x 3" slots	9/16" diameter holes	9/16" diameter on 17/8" centers	7/8" diameter knockouts
B11	3 1/4" (82.5)	1 5/8" (41.3)	12 Ga.	.105	—	—	1	1	1	—	1
B12	2 7/16" (61.9)	1 5/8" (41.3)	12 Ga.	.105	—	—	1 2	1	1 2	—	1 2
B22	1 5/8" (41.3)	1 5/8" (41.3)	12 Ga.	.105	12 Ga.	12 Ga.	1 2 3 4	1 3	1 2 3 4	1	1 2
B24	1 5/8" (41.3)	1 5/8" (41.3)	14 Ga.	.080	14 Ga.	14 Ga.	1 2 3 4	1	1 2 3 4	—	1 2
B26	1 5/8" (41.3)	1 5/8" (41.3)	16 Ga.	—	—	—	1	1	1	—	1
B32	1 3/8" (34.9)	1 5/8" (41.3)	12 Ga.	—	12 Ga.	—	1 3	1	1 3	—	1
B42	1" (25.4)	1 5/8" (41.3)	12 Ga.	—	12 Ga.	—	1 3	1	1 3	—	1
B52	1 3/16" (20.6)	1 5/8" (41.3)	12 Ga.	—	12 Ga.	12 Ga.	1 3 4	1	1	—	1
B54	1 3/16" (20.6)	1 5/8" (41.3)	14 Ga.	.080	14 Ga.	14 Ga.	1 2 3 4	1	1 2 3 4	—	1 2
B56	1 3/16" (20.6)	1 5/8" (41.3)	16 Ga.	—	—	—	1	1	1	—	1
B62	1 3/16" (20.6)	1 3/16" (20.6)	18 Ga.	—	—	—	—	—	—	—	—
B72	1 3/32" (10.3)	1 3/16" (20.6)	18 Ga.	—	—	—	—	—	—	—	—

The selection has been prepared to provide a reference for available channel, materials and hole patterns. Material types available for various hole patterns are defined by numbers 1 thru 4.

Some stainless steel channels with hole patterns are available on special order only.

\*Metric equivalent for thicknesses shown in chart.

12 Ga. = 2.6 mm

18 Ga. = 1.2 mm

14 Ga. = 1.9 mm

.105 = 2.6 mm

16 Ga. = 1.5 mm

.080 = 2.0 mm

\*\* 1 - Steel

2 - Aluminum

3 - Type 304 Stainless Steel

4 - Type 316 Stainless Steel

Properties may vary due to commercial tolerances of the material.

Channel Part Numbering			
Example: B22 SH - 120 SS4			
Channel Type	Hole Patterns	Length	Material/Finish
B11	SH (pg. 74)	120	GRN
B12	S (pg. 74)	240	GLV
B22	H178 (pg. 74)		HDG
B24	TH (pg. 75)		PLN
B26	K06 (pg. 75)		YZN
B32	SHA (pg. 75)		SS4 (See page 222)
B42	S58 (pg. 76)		SS6 (See page 222)
B52	M (pg. 76)		AL (See pages 219-220)
B54	H25 (pg. 76)		
B56	Leave blank for no hole pattern		
B62 <sup>Δ</sup>			
B72 <sup>Δ</sup>	Δ Hole patterns are not available on these channel sizes		

Reference page 48 for general fitting and standard finish specifications.



# B22 Channel

## B22

- Thickness: 12 Gauge (2.6 mm)
- Standard lengths: 10' (3.05 m) & 20' (6.09 m)
- Standard finishes: Plain, DURA GREEN™, Pre-Galvanized, Hot-Dipped Galvanized, Stainless Steel Type 304 or 316, Aluminum
- Weight: 1.90 Lbs./Ft. (2.83 kg/m)


Note:

Aluminum loading, for B22 & B22A, can be determined by multiplying load data times a factor of 0.38

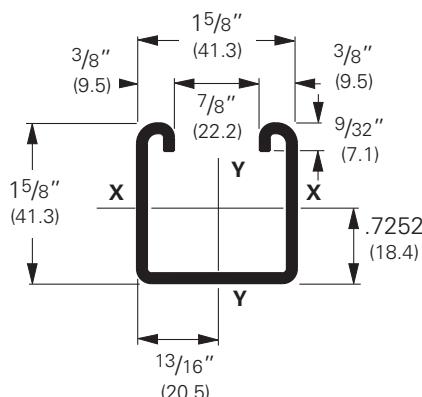


Section Properties			X - X Axis			Y - Y Axis		
Channel	Weight lbs./ft. kg/m	Areas of Section sq. in. cm <sup>2</sup>	Moment of Inertia (I) in. <sup>4</sup> cm <sup>4</sup>	Section Modulus (S) in. <sup>3</sup> cm <sup>3</sup>	Radius of Gyration (r) in. cm	Moment of Inertia (I) in. <sup>4</sup> cm <sup>4</sup>	Section Modulus (S) in. <sup>3</sup> cm <sup>3</sup>	Radius of Gyration (r) in. cm
B22	1.910 (2.84)	.562 (3.62)	.1912 (7.96)	.2125 (3.48)	.583 (1.48)	.2399 (9.99)	.2953 (4.84)	.653 (1.66)
B22A	3.820 (5.69)	1.124 (7.25)	.9732 (40.51)	.5989 (9.81)	.931 (2.36)	.4798 (19.97)	.5905 (9.68)	.653 (1.66)
B22X	6.649 (9.89)	1.956 (12.62)	4.1484(172.67)	1.7019 (27.89)	1.456 (3.70)	1.1023(45.88)	1.2027(19.71)	.751 (1.91)

Calculations of section properties are based on metal thicknesses as determined by the AISI Cold-Formed Steel Design Manual.

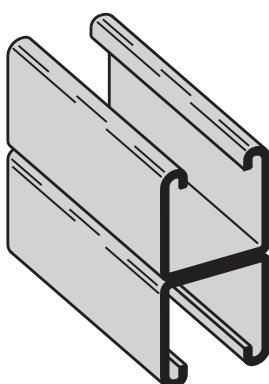

## B22A

Wt. 3.80 Lbs./Ft. (5.65 kg/m)

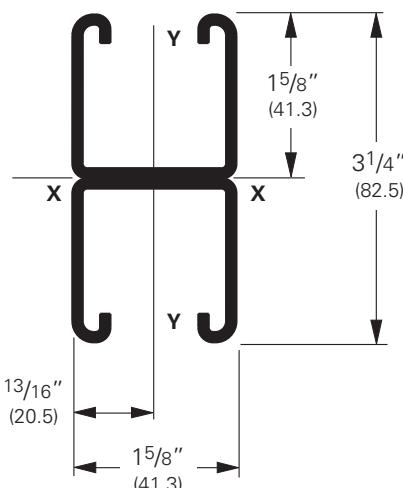

# B22 Beam Loading Data

## Beam Loading

Beam Span In. mm	Channel Style	Uniform Load and Deflection				Uniform Load @ Deflection =			
		Lbs.	kN	In.	mm	1/240 Span Lbs.	kN	1/360 Span Lbs.	kN
12 (305)	<b>B22</b>	2610	(11.61)	.014	(.35)	2610	(11.61)	2610	(11.61)
	<b>B22A</b>	2610*	(11.61)	.002	(.05)	2610*	(11.61)	2610*	(11.61)
	<b>B22X</b>	5790*	(25.75)	.001	(.02)	5790*	(25.75)	5790*	(25.75)
18 (457)	<b>B22</b>	2269	(10.09)	.031	(.79)	2269	(10.09)	2269	(10.09)
	<b>B22A</b>	2610*	(11.61)	.007	(.18)	2610*	(11.61)	2610*	(11.61)
	<b>B22X</b>	5790*	(25.75)	.003	(.07)	5790*	(25.75)	5790*	(25.75)
24 (609)	<b>B22</b>	1702	(7.57)	.056	(1.42)	1702	(7.57)	1702	(7.57)
	<b>B22A</b>	2610*	(11.61)	.017	(.43)	2610*	(11.61)	2610*	(11.61)
	<b>B22X</b>	5790*	(25.75)	.008	(.20)	5790*	(25.75)	5790*	(25.75)
30 (762)	<b>B22</b>	1361	(6.05)	.087	(2.21)	1361	(6.05)	1294	(5.75)
	<b>B22A</b>	2610*	(11.61)	.033	(.84)	2610*	(11.61)	2610*	(11.61)
	<b>B22X</b>	5790*	(25.75)	.017	(.73)	5790*	(25.75)	5790*	(25.75)
36 (914)	<b>B22</b>	1135	(5.05)	.126	(3.20)	1135	(5.05)	899	(4.00)
	<b>B22A</b>	2610*	(11.61)	.057	(1.45)	2610*	(11.61)	2610*	(11.61)
	<b>B22X</b>	5790*	(25.75)	.029	(.73)	5790*	(25.75)	5790*	(25.75)
42 (1067)	<b>B22</b>	972	(4.32)	.172	(4.37)	972	(4.32)	660	(2.93)
	<b>B22A</b>	2610*	(11.61)	.091	(2.31)	2610*	(11.61)	2610*	(11.61)
	<b>B22X</b>	5790*	(25.75)	.046	(1.17)	5790*	(25.75)	5790*	(25.75)
48 (1219)	<b>B22</b>	851	(3.78)	.224	(5.69)	758	(3.37)	505	(2.24)
	<b>B22A</b>	2405	(10.70)	.125	(3.17)	2405	(10.70)	2405	(10.70)
	<b>B22X</b>	5790*	(25.75)	.068	(1.73)	5790*	(25.75)	5790*	(25.75)
54 (1371)	<b>B22</b>	756	(3.36)	.284	(7.21)	599	(2.66)	399	(1.77)
	<b>B22A</b>	2138	(9.51)	.158	(4.01)	2138	(9.51)	2024	(9.00)
	<b>B22X</b>	5790*	(25.75)	.097	(2.46)	5790*	(25.75)	5790*	(25.75)
60 (1524)	<b>B22</b>	681	(3.03)	.351	(8.91)	485	(2.16)	323	(1.44)
	<b>B22A</b>	1924	(8.56)	.195	(4.95)	1924	(8.56)	1640	(7.29)
	<b>B22X</b>	5645	(25.11)	.130	(3.30)	5645	(25.11)	5645	(25.11)
66 (1676)	<b>B22</b>	619	(2.75)	.424	(10.77)	401	(1.78)	267	(1.19)
	<b>B22A</b>	1749	(7.78)	.236	(5.99)	1749	(7.78)	1355	(6.03)
	<b>B22X</b>	5132	(22.83)	.158	(4.01)	5132	(22.83)	5132	(22.83)
72 (1829)	<b>B22</b>	567	(2.52)	.505	(12.83)	337	(1.50)	225	(1.00)
	<b>B22A</b>	1603	(7.13)	.281	(7.14)	1603	(7.13)	1139	(5.06)
	<b>B22X</b>	4704	(20.92)	.188	(4.77)	4704	(20.92)	4704	(20.92)
78 (1981)	<b>B22</b>	524	(2.33)	.593	(15.06)	287	(1.27)	191	(0.85)
	<b>B22A</b>	1480	(6.58)	.330	(8.38)	1455	(6.47)	970	(4.31)
	<b>B22X</b>	4342	(19.31)	.220	(5.59)	4342	(19.31)	4270	(18.99)
84 (2133)	<b>B22</b>	486	(2.16)	.687	(17.45)	248	(1.10)	165	(0.73)
	<b>B22A</b>	1374	(6.11)	.383	(9.73)	1255	(5.58)	837	(3.72)
	<b>B22X</b>	4032	(17.93)	.255	(6.48)	4032	(17.93)	3682	(16.38)
90 (2286)	<b>B22</b>	454	(2.02)	.789	(20.04)	216	(0.96)	144	(0.64)
	<b>B22A</b>	1283	(5.71)	.440	(11.17)	1093	(4.86)	729	(3.24)
	<b>B22X</b>	3763	(16.74)	.293	(7.44)	3763	(16.74)	3207	(14.26)
96 (2438)	<b>B22</b>	425	(1.89)	.898	(22.81)	190	(0.84)	126	(0.56)
	<b>B22A</b>	1202	(5.35)	.500	(12.70)	961	(4.27)	640	(2.85)
	<b>B22X</b>	3528	(15.69)	.334	(8.48)	3528	(15.69)	2819	(12.54)
102 (2591)	<b>B22</b>	400	(1.78)	1.013	(25.73)	168	(0.75)	112	(0.50)
	<b>B22A</b>	1132	(5.03)	.565	(14.35)	851	(3.78)	567	(2.52)
	<b>B22X</b>	3320	(14.77)	.377	(9.57)	3320	(14.77)	2497	(11.11)
108 (2743)	<b>B22</b>	378	(1.68)	1.136	(28.85)	150	(0.67)	100	(0.44)
	<b>B22A</b>	1069	(4.75)	.633	(16.08)	759	(3.37)	506	(2.25)
	<b>B22X</b>	3136	(13.95)	.422	(10.72)	3136	(13.95)	2227	(9.90)
114 (2895)	<b>B22</b>	358	(1.59)	1.266	(32.15)	134	(0.59)	90	(0.40)
	<b>B22A</b>	1013	(4.50)	.706	(17.93)	681	(3.03)	454	(2.02)
	<b>B22X</b>	2971	(13.21)	.471	(11.96)	2971	(13.21)	1999	(8.89)
120 (3048)	<b>B22</b>	340	(1.51)	1.403	(35.63)	121	(0.54)	81	(0.36)
	<b>B22A</b>	962	(4.28)	.782	(19.86)	615	(2.73)	410	(1.82)
	<b>B22X</b>	2822	(12.55)	.521	(13.23)	2706	(12.04)	1804	(8.02)

Based on simple beam condition using an allowable design stress of 25,000 psi (172 MPa) in accordance with MFMA, with adequate lateral bracing (see page 12 for further explanation). Actual yield point of cold rolled steel is 42,000 psi. To determine concentrated load capacity at mid span, multiply uniform load by 0.5 and corresponding deflection by 0.8. \*Failure determined by weld shear.

# B22 Column Loading Data

## Column Loading

Unbraced Height In. mm	Channel Style	Max. Column Loading K = .80 Loaded@ C.G.		Max. Column Loading (Loaded @ C.G.)		K = .65		K = 1.0		K = 1.2		
		Lbs.	kN	Lbs.	kN	Lbs.	kN	Lbs.	kN	Lbs.	kN	
		<b>B22</b>	10454 (46.50)	4276 (19.12)	10598 (47.14)	10222 (45.47)	9950 (44.26)	<b>B22A</b>	21625 (96.19)	7002 (31.14)	21677 (96.42)	21539 (95.81)
12 (305)	<b>B22X</b>	46948 (208.83)	18975 (84.40)	47061 (209.34)	46761 (208.00)	46531 (206.98)						
	<b>B22</b>	9950 (44.26)	4153 (18.47)	10253 (45.62)	9481 (42.17)	8955 (39.83)	<b>B22A</b> <th>21433 (95.34)</th> <td>6959 (30.95)</td> <td>21551 (95.86)</td> <td>21239 (94.47)</td> <td>21001 (93.42)</td>	21433 (95.34)	6959 (30.95)	21551 (95.86)	21239 (94.47)	21001 (93.42)
	<b>B22X</b>	46531 (206.98)	18859 (83.90)	46787 (208.12)	46110 (205.11)	45593 (202.81)						
18 (457)	<b>B22</b>	9311 (41.42)	3993 (17.76)	9801 (43.60)	8582 (38.17)	7801 (34.70)	<b>B22A</b> <th>21164 (94.14)</th> <td>6898 (30.68)</td> <td>21373 (95.07)</td> <td>20819 (92.61)</td> <td>20397 (90.73)</td>	21164 (94.14)	6898 (30.68)	21373 (95.07)	20819 (92.61)	20397 (90.73)
	<b>B22X</b>	45947 (204.38)	18693 (84.44)	46401 (206.40)	45198 (201.05)	44282 (196.97)						
	<b>B22</b>	8582 (38.17)	3802 (16.91)	9268 (41.22)	7601 (33.81)	6595 (29.33)	<b>B22A</b> <th>20819 (92.61)</th> <td>6821 (30.34)</td> <td>21145 (94.06)</td> <td>20279 (90.20)</td> <td>19619 (87.27)</td>	20819 (92.61)	6821 (30.34)	21145 (94.06)	20279 (90.20)	19619 (87.27)
24 (609)	<b>B22X</b>	45198 (201.05)	18485 (82.22)	45906 (204.20)	44026 (195.84)	42593 (189.46)						
	<b>B22</b>	7801 (34.70)	3589 (15.96)	8676 (38.59)	6595 (28.33)	5392 (23.98)	<b>B22A</b> <td>20397 (90.73)</td> <td>6728 (29.93)</td> <td>20866 (92.81)</td> <td>19619 (87.27)</td> <td>18669 (83.04)</td>	20397 (90.73)	6728 (29.93)	20866 (92.81)	19619 (87.27)	18669 (83.04)
	<b>B22X</b>	44282 (196.97)	18233 (81.10)	45300 (201.50)	42593 (189.46)	40530 (180.28)						
30 (762)	<b>B22</b>	6998 (31.13)	3360 (14.94)	8048 (35.80)	5595 (24.89)	4444 (19.77)	<b>B22A</b> <td>19898 (88.51)</td> <td>6620 (29.45)</td> <td>20537 (91.33)</td> <td>18840 (83.80)</td> <td>17546 (78.05)</td>	19898 (88.51)	6620 (29.45)	20537 (91.33)	18840 (83.80)	17546 (78.05)
	<b>B22X</b>	43198 (192.15)	17940 (79.80)	44586 (198.33)	40901 (181.94)	38092 (169.44)						
	<b>B22</b>	6193 (27.55)	3118 (13.87)	7401 (32.92)	4718 (20.99)	3791 (16.86)	<b>B22A</b> <td>19322 (85.95)</td> <td>6496 (28.89)</td> <td>20157 (89.66)</td> <td>17940 (79.80)</td> <td>16251 (72.29)</td>	19322 (85.95)	6496 (28.89)	20157 (89.66)	17940 (79.80)	16251 (72.29)
42 (1067)	<b>B22X</b>	41948 (186.59)	17604 (78.30)	43761 (194.57)	38948 (173.25)	35281 (156.94)						
	<b>B22</b>	5392 (23.98)	2864 (12.74)	6746 (30.01)	4090 (18.19)	3310 (14.72)	<b>B22A</b> <td>18669 (83.04)</td> <td>6263 (27.86)</td> <td>19276 (87.74)</td> <td>16920 (75.26)</td> <td>14782 (65.75)</td>	18669 (83.04)	6263 (27.86)	19276 (87.74)	16920 (75.26)	14782 (65.75)
	<b>B22X</b>	40530 (180.28)	16973 (75.50)	42825 (190.49)	36733 (163.39)	32092 (142.75)						
48 (1219)	<b>B22</b>	4718 (20.99)	2631 (11.70)	6093 (27.10)	3616 (16.08)	2936 (13.06)	<b>B22A</b> <td>17940 (79.80)</td> <td>5340 (23.75)</td> <td>19244 (85.60)</td> <td>15781 (70.20)</td> <td>13141 (58.45)</td>	17940 (79.80)	5340 (23.75)	19244 (85.60)	15781 (70.20)	13141 (58.45)
	<b>B22X</b>	38948 (173.25)	14471 (64.37)	41779 (185.84)	34260 (152.39)	28529 (126.90)						
	<b>B22</b>	4202 (18.69)	2434 (10.83)	5441 (24.20)	3242 (14.42)	2634 (11.71)	<b>B22A</b> <td>17134 (76.21)</td> <td>4587 (20.40)</td> <td>18712 (83.23)</td> <td>14521 (64.59)</td> <td>11328 (50.39)</td>	17134 (76.21)	4587 (20.40)	18712 (83.23)	14521 (64.59)	11328 (50.39)
54 (1371)	<b>B22X</b>	37198 (165.46)	12431 (55.29)	40624 (180.70)	31525 (140.23)	24593 (109.39)						
	<b>B22</b>	3791 (16.86)	2264 (10.07)	4869 (21.66)	2936 (13.06)	2381 (10.59)	<b>B22A</b> <td>16251 (72.29)</td> <td>3968 (17.65)</td> <td>18129 (80.64)</td> <td>13141 (58.45)</td> <td>9524 (42.36)</td>	16251 (72.29)	3968 (17.65)	18129 (80.64)	13141 (58.45)	9524 (42.36)
	<b>B22X</b>	35281 (156.94)	10753 (47.83)	39358 (175.07)	28529 (126.90)	20676 (91.97)						
60 (1524)	<b>B22</b>	3456 (15.37)	2116 (9.41)	4412 (19.62)	2680 (11.92)	2166 (9.63)	<b>B22A</b> <td>15291 (68.02)</td> <td>3456 (15.37)</td> <td>17496 (77.82)</td> <td>11642 (51.78)</td> <td>8115 (36.10)</td>	15291 (68.02)	3456 (15.37)	17496 (77.82)	11642 (51.78)	8115 (36.10)
	<b>B22X</b>	33197 (147.67)	9366 (41.66)	37984 (168.96)	25275 (112.43)	17617 (78.36)						
	<b>B22</b>	3176 (14.13)	1984 (8.82)	4037 (17.96)	2461 (10.95)	1980 (8.81)	<b>B22A</b> <td>14255 (63.41)</td> <td>3028 (13.47)</td> <td>16812 (74.78)</td> <td>10076 (44.82)</td> <td>6998 (31.13)</td>	14255 (63.41)	3028 (13.47)	16812 (74.78)	10076 (44.82)	6998 (31.13)
66 (1676)	<b>B22X</b>	30947 (137.66)	8206 (36.50)	36499 (162.35)	21875 (97.30)	15192 (67.58)						
	<b>B22</b>	2936 (13.06)	1867 (8.30)	3724 (16.56)	2270 (10.10)	1816 (8.08)	<b>B22A</b> <td>13141 (58.45)</td> <td>2667 (11.86)</td> <td>16077 (71.51)</td> <td>8778 (39.04)</td> <td>6096 (27.11)</td>	13141 (58.45)	2667 (11.86)	16077 (71.51)	8778 (39.04)	6096 (27.11)
	<b>B22X</b>	28529 (126.90)	7227 (32.15)	34903 (155.25)	19057 (84.77)	13234 (58.87)						
78 (1981)	<b>B22</b>	2728 (16.58)	1761 (7.83)	3456 (15.37)	2101 (9.34)	1671 (7.43)	<b>B22A</b> <td>11951 (53.16)</td> <td>2359 (10.49)</td> <td>15291 (68.02)</td> <td>7715 (34.32)</td> <td>5357 (23.83)</td>	11951 (53.16)	2359 (10.49)	15291 (68.02)	7715 (34.32)	5357 (23.83)
	<b>B22X</b>	25945 (115.41)	6393 (28.44)	33197 (147.67)	16749 (74.50)	11630 (51.73)						
	<b>B22</b>	2545 (11.32)	1664 (7.40)	3225 (14.34)	1951 (8.68)	1542** (6.34)	<b>B22A</b> <td>10678 (47.50)</td> <td>2093 (9.31)</td> <td>14455 (64.30)</td> <td>6834 (30.40)</td> <td>4746 (21.11)</td>	10678 (47.50)	2093 (9.31)	14455 (64.30)	6834 (30.40)	4746 (21.11)
84 (2133)	<b>B22X</b>	23182 (103.12)	5672 (25.23)	31382 (139.59)	14836 (65.99)	10303 (45.83)						
	<b>B22</b>	2381 (10.59)	1575 (7.00)	3022 (13.44)	1816 (8.08)	1426** (68.60)	<b>B22A</b> <td>9524 (42.36)</td> <td>1867 (8.30)</td> <td>13568 (60.35)</td> <td>6096 (27.11)</td> <td>4233 (18.83)</td>	9524 (42.36)	1867 (8.30)	13568 (60.35)	6096 (27.11)	4233 (18.83)
	<b>B22X</b>	20676 (91.97)	5059 (22.50)	29456 (131.03)	13234 (58.87)	9190 (40.88)						
90 (2286)	<b>B22</b>	2234 (9.94)	1494 (6.64)	2842 (12.64)	1694 (7.53)	1322** (5.88)	<b>B22A</b> <td>8548 (38.02)</td> <td>1675 (7.45)</td> <td>12630 (56.18)</td> <td>5471 (24.33)</td> <td>3799** (16.90)</td>	8548 (38.02)	1675 (7.45)	12630 (56.18)	5471 (24.33)	3799** (16.90)
	<b>B22X</b>	18558 (82.55)	4539 (20.19)	27420 (121.97)	11877 (52.83)	8247 (36.68)						
	<b>B22</b>	2101 (9.34)	1418 (6.31)	2680 (11.92)	1583** (7.04)	1228** (5.46)	<b>B22A</b> <td>7715 (34.32)</td> <td>1512 (6.72)</td> <td>11642 (51.78)</td> <td>4937 (21.96)</td> <td>3429** (15.25)</td>	7715 (34.32)	1512 (6.72)	11642 (51.78)	4937 (21.96)	3429** (15.25)
102 (2591)	<b>B22X</b>	16749 (74.50)	4097 (18.22)	25275 (112.43)	10718 (47.67)	7444 (33.11)						
	<b>B22</b>											
	<b>B22A</b>											
108 (2743)	<b>B22X</b>											
	<b>B22</b>											
	<b>B22A</b>											
114 (2895)	<b>B22X</b>											
	<b>B22</b>											
	<b>B22A</b>											
120 (3048)	<b>B22X</b>											
	<b>B22</b>											
	<b>B22A</b>											

\*\*Where the slenderness ratio  $\frac{KL}{r}$  exceeds 200, and K = end fixity factor, L = actual length and r = radius of gyration.