

# CONNECTORS

## Compression Connectors

### Copper Splice Long Barrel

#### C Series




#### FEATURES

- Produced from high conductivity copper tubing.
- Serrations indicate proper crimp locations.
- Tin-plated to provide corrosion resistance.
- Marked with die index and color coded.
- Suitable for use at voltages up to 35KV provided connector is properly installed to cable manufacturer voltage stress relief instructions.
- 5KV is the maximum voltage in all bare splices.

#### SPECIFICATIONS

- UL486A Listed Wire Connector.
- UL467 Grounding & Bonding (Sizes 8 AWG - 3/0 AWG).
- Max ampacity is based on NEC 310.15, insulation type, and conductor material. Please consult your current NEC manual..
- \* CLASS B OR C BUILDING WIRE CU CABLE ONLY.
- Temperature Rating: 90 °C.
- Voltage: 600V max.
- 9CU.

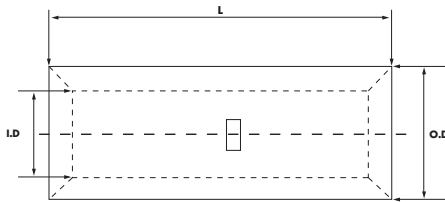

**\*EXPANDED WIRE RANGE** when installed with NSI N12ID dieless compression tool.  
UL Listed with other tools:

**FOR TOOL/DIE CRIMPING INFORMATION, PLEASE SEE TABLE ON PAGE 87**

CAT. NO.	WIRE RANGE	EXPANDED WIRE RANGE*	COLOR CODE INDEX	I.D. (IN.)	O.D. (IN.)	LENGTH (L) (IN.)	STD. CTN. QTY.
C-8	8 AWG	8 AWG	Red	0.173	0.272	1.752	100
C-6	6 AWG	6 - 8 AWG	Blue	0.205	0.295	1.752	100
C-4	4 AWG	4 - 6 AWG	Gray	0.252	0.343	1.752	100
C-3	3 AWG	3 - 6 AWG	White	0.282	0.378	2.381	50
C-2	2 AWG	2 - 6 AWG	Brown	0.315	0.421	1.902	50
C-1	1 AWG	1 - 6 AWG	Green	0.358	0.469	2.201	50
C-1/0	1/0 AWG	1/0 - 6 AWG	Pink	0.390	0.520	2.201	50
C-2/0	2/0 AWG	2/0 - 4 AWG	Black	0.441	0.563	2.252	25
C-3/0	3/0 AWG	3/0 - 2 AWG	Orange	0.492	0.622	2.252	25
C-4/0	4/0 AWG	4/0 - 1 AWG	Purple	0.547	0.689	2.752	25
C-250	250 MCM	250 MCM - 1/0 AWG	Yellow	0.594	0.752	3.252	25
C-300	300 MCM	300 MCM - 2/0 AWG	White	0.657	0.815	3.504	12
C-350	350 MCM	350 MCM - 3/0 AWG	Red	0.701	0.874	3.752	12
C-400	400 MCM	400 MCM - 4/0 AWG	Blue	0.764	0.949	3.752	6
C-500	500 MCM	500 - 250 MCM	Brown	0.835	1.063	4.252	6
C-600	600 MCM	600 - 250 MCM	Green	0.925	1.189	4.500	6
C-750	750 MCM	750-500 MCM	Black	1.031	1.311	4.752	3
C-1000	1000 MCM	1000-750 MCM	White	1.189	1.527	6.122	3

# CONNECTORS

## Compression Connectors

### Copper Splice Long Barrel

#### C Series




#### FEATURES

- Produced from high conductivity copper tubing.
- Serrations indicate proper crimp locations.
- Tin-plated to provide corrosion resistance.
- Marked with die index and color coded.
- Suitable for use at voltages up to 35KV provided connector is properly installed to cable manufacturer voltage stress relief instructions.
- 5KV is the maximum voltage in all bare splices.

#### SPECIFICATIONS

- UL486A Listed Wire Connector.
- UL467 Grounding & Bonding (Sizes 8 AWG - 3/0 AWG).
- Max ampacity is based on NEC 310.15, insulation type, and conductor material. Please consult your current NEC manual..
- \* CLASS B OR C BUILDING WIRE CU CABLE ONLY.
- Temperature Rating: 90 °C.
- Voltage: 600V max.
- 9CU.

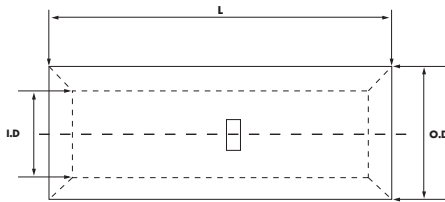

**\*EXPANDED WIRE RANGE** when installed with NSI N12ID dieless compression tool.  
UL Listed with other tools:

**FOR TOOL/DIE CRIMPING INFORMATION, PLEASE SEE TABLE ON PAGE 87**

CAT. NO.	WIRE RANGE	EXPANDED WIRE RANGE*	COLOR CODE INDEX	I.D. (IN.)	O.D. (IN.)	LENGTH (L) (IN.)	STD. CTN. QTY.
C-8	8 AWG	8 AWG	Red	0.173	0.272	1.752	100
C-6	6 AWG	6 - 8 AWG	Blue	0.205	0.295	1.752	100
C-4	4 AWG	4 - 6 AWG	Gray	0.252	0.343	1.752	100
C-3	3 AWG	3 - 6 AWG	White	0.282	0.378	2.381	50
C-2	2 AWG	2 - 6 AWG	Brown	0.315	0.421	1.902	50
C-1	1 AWG	1 - 6 AWG	Green	0.358	0.469	2.201	50
C-1/0	1/0 AWG	1/0 - 6 AWG	Pink	0.390	0.520	2.201	50
C-2/0	2/0 AWG	2/0 - 4 AWG	Black	0.441	0.563	2.252	25
C-3/0	3/0 AWG	3/0 - 2 AWG	Orange	0.492	0.622	2.252	25
C-4/0	4/0 AWG	4/0 - 1 AWG	Purple	0.547	0.689	2.752	25
C-250	250 MCM	250 MCM - 1/0 AWG	Yellow	0.594	0.752	3.252	25
C-300	300 MCM	300 MCM - 2/0 AWG	White	0.657	0.815	3.504	12
C-350	350 MCM	350 MCM - 3/0 AWG	Red	0.701	0.874	3.752	12
C-400	400 MCM	400 MCM - 4/0 AWG	Blue	0.764	0.949	3.752	6
C-500	500 MCM	500 - 250 MCM	Brown	0.835	1.063	4.252	6
C-600	600 MCM	600 - 250 MCM	Green	0.925	1.189	4.500	6
C-750	750 MCM	750-500 MCM	Black	1.031	1.311	4.752	3
C-1000	1000 MCM	1000-750 MCM	White	1.189	1.527	6.122	3