ELLIOTT ELECTRIC SUPPLY
We Deliver...Lower Cost, Quality Products, & Personal Service
2310 N. Stallings Dr.
Nacogdoches, TX 75964-0
Phone: 9365697941
Fax: 9365604685



CPL4 4" PVC COUPLING

CANTEX,INC

Catalog Number	CPL4
Manufacturer	CANTEX,INC
Description	CANTEX 6141632 is a 4 in. Schedule 40 Standard Center Stop Coupling used to join lengths of conduit pipe together with two solvent weld socket ends
Weight per unit	0.8670 (lbs/each)
Product Category	PVC Conduit Fittings & Accy

Features

Inside Diameter	4.500
Schedule	40
Outside Diameter	5.000

Material, Color, and Finish

Color	Gray

Dimensions and Weight

Length	4.188
Size	4 in. Schedule 40 Standard Center Stop Coupling

Descriptions

Description	4" PVC COUPLING
Features	CANTEX 6141632 is a 4 in. Schedule 40 Standard Center Stop Coupling used to join lengths of conduit pipe together with two solvent weld socket ends
Long Description	CANTEX 6141632 is a 4 in. Schedule 40 Standard Center Stop Coupling used to join lengths of conduit pipe together with two solvent weld socket ends
Product Type	4 Ul CPLG CC
Special Features	Center stop to help determine proper depth of connection
Extra Long Description	CTX 6141632 4 UL CPLG CC

Manufacturer Information

Brand	PVC & Accessories
	CANTEX INC.
GTIN	00088700547360
Manufacturers Part Number	6141632
UPC	881780

Taxonomies, Classifications, and Categories

Category Description	COUPLINGS, ADAPTERS, REDUCERS, BUSHINGS, & CAPS
Type	Schedule 40 Standard Center Stop Coupling

ELLIOTT ELECTRIC SUPPLY
We Deliver...Lower Cost, Quality Products, & Personal Service
2310 N. Stallings Dr.
Nacogdoches, TX 75964-0
Phone: 9365697941
Fax: 9365604685

Trade Size

Trade Size	4

Packaging

Carton	20
Weight Per Each	0.8670 (lbs/each)

Uses, Certifications, and Standards

Application	Schedule 40 Standard Center Stop Coupling
Standard	UL Listed

Schedule 40 Center Stop Coupling

CANTEX

Standard UL Schedule 40 Center Stop Coupling



Schedule 40 Standard Center Stop Couplings are used to join lengths of conduit pipe together with two solvent weld socket ends.

- For use with Schedule 40 and Schedule 80 conduit
- Center stop to help determine proper depth of connection
- For use aboveground and underground and non-conductive and sunlight resistant
- Meets NEMA TC-3 Standards
- UL and CSA listed
- Made in USA

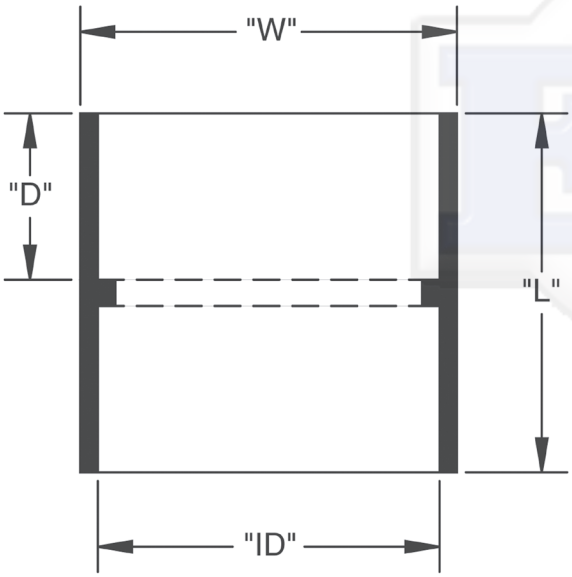

Part Number	Trade Size	Carton Qty.	"W"	"L"	"ID"	"D"
6141623	1/2	200	1.063	1.500	.875	.625
6141624	3/4	125	1.313	1.563	1.063	.625
6141625	1	70	1.625	2.000	1.313	1.000
6141626	1-1/4	40	2.000	2.125	1.688	1.000
6141627	1-1/2	30	2.250	2.375	1.938	1.063
6141628	2	40	2.688	2.600	2.375	1.192
6141629	2-1/2	20	3.250	3.500	2.875	1.750
6141630	3	40	4.000	3.875	3.500	1.188
6141631	3-1/2	30	4.1250	4.000	4.000	1.938
6141632	4	20	5.000	4.188	4.500	2.000
6141633	5	10	6.125	5.375	5.625	2.500
6141634	6	8	7.250	6.375	6.625	3.000
* 6141635D	8	1	9. 313	13.000	8.625	5.000

* Not UL Listed

Dimensions are nominal



SINGLE SOURCE FOR PVC ELECTRICAL

CANTEX offers an all-inclusive line of Schedule 40 & Schedule 80 PVC electrical fittings and accessories. With several decades of experience manufacturing PVC fittings and accessories, you can trust CANTEX to provide quality products.

All of our PVC fittings are easy-to-install and offer non-conductivity, high impact, tensile strength, industry certifications, and resistance to a wide range of chemicals, acids, and salt. Our schedule 40 & 80 fittings and accessories connect seamlessly with other standard schedule 40 & 80 products making it easy to convert entire electrical infrastructures to PVC. See our full line of PVC electrical products at www.cantexinc.com.