

# Enclosure Accessories - Drains and Breathers

## ECD Series

Cl. I, Div. 1 & 2, Groups B, C, D  
Cl. II, Div. 1, Groups E, F, G  
Cl. II, Div. 2, Groups F, G  
Cl. III

II 2 G Ex d IIB (ECD15)  
II 2 G Ex d IIB + Hydrogen (ECD  
Type 4X Series)  
Explosionproof  
Dust-Ignitionproof

6E

### Applications:

- ECD drains and breathers are installed in enclosures or conduit systems to:
  - Provide ventilation to minimize condensation
  - Drain accumulated condensate
- At least one breather should be used with each drain
- A breather is installed in top of enclosure or upper section of conduit system
- A "standard" drain is installed in bottom of enclosure or in lower section of conduit system
- "Universal" breather or drain functions as a breather when mounted at the top of an enclosure, or as a drain when mounted in the bottom of an enclosure
- "Combination" breather and drain is used in those applications where the use of a top mounted breather is not practical due to limited space; or in offshore and marine installations where moisture may enter the enclosure through the breather located on top of enclosure
- Drains and breathers are installed in hubs or drilled and tapped openings

### Features:

ECD284, ECD384, ECD385 and ECD15 "Universal" drains and breathers have:

- Patented labyrinth design, suitable for use in Class I, Division 1 & 2, Groups C,D and Class II, Division 1 & 2, Groups F,G areas
- Capability to pass 50 cc of water per minute and 0.2 cubic feet of air per minute at atmospheric pressure
- ECD15 and ECD385 each have a well inside the inner, threaded end to provide for accumulation of sediment without clogging when used as a drain

"Standard" ECD drains and breathers have:

- Thread-in-thread design, suitable for use in Class I, Division 1 & 2, Groups C,D; Class II, Division 1, Groups E,F,G; Class II, Division 2, Groups F,G and Class III areas
- ECD 11, 13 have capability to pass 25 cc of water per minute and .05 cubic feet of air per minute at atmospheric pressure
- ECD387 and ECD16 are a unique thread-in-shaft design for use in Class I, Division 1 & 2, Groups B,C,D; Class II, Division 1, Groups E,F,G; Class II, Division 2, Groups F,G; Class III areas. The ECD387 and ECD16 can pass 15cc of water per minute. The ECD16 can pass .01 cubic feet of air per minute

"Combination" ECD breather and drain:

- Provides ventilation to minimize condensation and drains accumulated condensate – two functions performed by a single device installed in the bottom of an enclosure or conduit system
- Have the capability to pass 25 cc of water per minute and .10 cubic feet of air per minute at atmospheric pressure
- Thread-in-thread and labyrinth design, suitable for use in Class I, Division 1 & 2, Groups C and D; Class II, Division 1 & 2, Groups F and G; and Class III areas

### Certifications and Compliances:

- NEC/CEC:
  - ECD 16, ECD387, ECD-N4D, ECD-N4B –**
    - Class I, Division 1 & 2, Groups B, C, D
    - Class II, Division 1, Groups E, F, G
    - Class II, Division 2, Groups F, G
    - Class III
  - IP46 (ECD-N4D and ECD-N4B only)**
  - IIB + Hydrogen (ECD-N4D and ECD-N4B only)**
  - ECD11, ECD13, ECD281 –**
    - Class I, Division 1 & 2, Groups C, D
    - Class II, Division 1, Groups E, F, G
    - Class II, Division 2, Groups F, G
    - Class III
  - ECD18, ECD384, ECD15, ECD385 –**
    - Class I, Division 1 & 2, Groups C, D
    - Class II, Division 1, Groups F, G
    - Class II, Division 2, Groups F, G
    - Class III
  - IP42 IIB (ECD 15 only)**
  - ECD284 –**
    - Class I, Division 1 & 2, Group C, D
    - Class II, Division 1, Groups F, G
    - Class II, Division 2, Groups F, G

- UL Standard: 1203
- CSA Standard: C22.2 No. 30
- Type 4X: ECD-N4D and ECD-N4B
- ATEX Certificate # ITS07ATEX15639U

### Standard Materials:

- ECD11, ECD15, ECD281, ECD284, ECD384, ECD385 – stainless steel
- ECD13 – stainless steel with aluminum cap
- ECD16, ECD-N4D, ECD-N4B – stainless steel
- ECD387 – stainless steel
- ECD18 – stainless steel with neoprene tube

### Size Ranges:

- 1/4" to 1/2"

#### Breather



Drain

Typical installation of drain and breather in a combination motor starter

- At least 5 full threads of drain or breather must be engaged in matching female thread, taper-tapped in accordance with NEMA/EEMAC Standard FB-1, Type NTC or National Bureau of Standards Handbook H28, Part II, Table 7.6.
- These breathers and drains can be factory installed on various explosion-proof equipment. See options on applicable equipment pages for suffixes to be used.



ECD11



ECD13



ECD15



ECD16



ECD18

### Ordering Information ECD "Type 4X" Drain and Breather

Size	Drain Cat. #	Breather Cat. #
3/8	ECD38 N4D	ECD38 N4B
1/2	ECD1 N4D	ECD1 N4B

### ECD "Standard" Drain and Breather

Size	Drain Cat. #	Breather Cat. #
1/4	ECD281	
3/8	ECD387	
1/2	ECD11	ECD13

### ECD "Universal" Drain or Breather

Size	Cat. #
1/4	ECD284†
3/8	ECD384†
3/8	ECD385
1/2	ECD15
1/2	ECD16

†Shorter overall length than ECD15 and ECD385. For use in confined spaces such as panelboard assemblies.

### ECD "Combination" Drain or Breather

Size	Cat. #
1/2	ECD18

## Crouse-Hinds

by **E.T.N**

www.crouse-hinds.com US: 1-866-764-5454 CAN: 1-800-265-0502 Copyright© 2013 Eaton's Crouse-Hinds Business

857

## Enclosure Accessories - Drains and Breathers

### CD Series / ACD NEMA 4X Series

#### Applications:

CD Series drains are for use in conduit systems to:

- Drain accumulated condensate.
- Provide ventilation to minimize condensation.

Drains are installed in hubs or drilled and tapped openings.

#### Certifications and Compliances:

- UL Standard 514B

#### Standard Materials:

- CD bodies and nuts – steel or aluminum
- CD screen – stainless steel

#### Standard Finishes:

- Steel – electrogalvanized with chromate treatment.

#### Options:

##### Description

Copper-free aluminum construction

##### Suffix

SA

#### Ordering Information

##### Size

1/2

3/4

##### Cat. #

CD1

CD2



## ACD Series NEMA 4X Breather/Drain

### ATEX and CENELEC Range

I M2 II 2GD, E Exe I & II  
(Stainless Steel & Brass only)  
II 2GD, E Exe II (Nylon version)  
CSA Cl. I, Div. 2, Groups  
A, B, C, D, Exe II

Enclosure Type 4X  
IP66

#### Applications:

- For use in enclosures to provide a method to effectively drain moisture while allowing the enclosure to breathe.

#### Features:

All NEMA 4X breather/drains offer:


- Castellated locknuts that allow moisture to pass between the enclosure and the locknut to the drain holes in the fitting.
- Available in brass, stainless steel (Type 316) or 30% glass filled nylon.
- Captive "O" ring on recess of the face of the breather/drain to optimize ingress protection.
- ATEX and CSA Certified for worldwide market acceptance.
- Available with metric or NPT threads.

#### Certifications and Compliances:

- SIRA 99 ATEX 3050U
- I M2 II 2GD, E Exe I & II (Stainless Steel & Brass only)
- II 2GD, E Exe II (Nylon only)
- CSA Class I, Division 2, Groups A, B, C & D, Exe II
- Enclosure Type 4X
- IP66

#### Operating Temperature:

- -50°C to +85°C

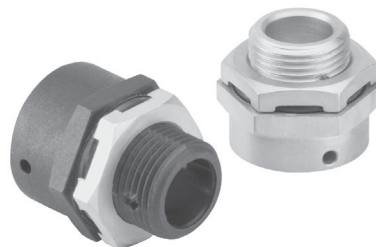

#### Ordering Information

##### Entry

##### Method

##### Material

##### Cat. #

M20

Brass

ACDPEB/M20/15

M20

Stainless Steel

ACDPES/M20/15

M20

Nylon

ACDPEN/M20/15

M25

Brass

ACDPEB/M25/15

M25

Stainless Steel

ACDPES/M25/15

M25

Nylon

ACDPEN/M25/15

1/2"

Brass

ACDPEB/050NPT/15

1/2"

Stainless Steel

ACDPES/050NPT/15

3/4"

Brass

ACDPEB/075NPT/15

3/4"

Stainless Steel

ACDPES/075NPT/15

# Enclosure Accessories - Drains and Breathers

## ECD Series

Cl. I, Div. 1 & 2, Groups B, C, D  
Cl. II, Div. 1, Groups E, F, G  
Cl. II, Div. 2, Groups F, G  
Cl. III

II 2 G Ex d IIB (ECD15)  
II 2 G Ex d IIB + Hydrogen (ECD  
Type 4X Series)  
Explosionproof  
Dust-Ignitionproof

6E

### Applications:

- ECD drains and breathers are installed in enclosures or conduit systems to:  
Provide ventilation to minimize condensation  
Drain accumulated condensate
- At least one breather should be used with each drain
- A breather is installed in top of enclosure or upper section of conduit system
- A "standard" drain is installed in bottom of enclosure or in lower section of conduit system
- "Universal" breather or drain functions as a breather when mounted at the top of an enclosure, or as a drain when mounted in the bottom of an enclosure
- "Combination" breather and drain is used in those applications where the use of a top mounted breather is not practical due to limited space; or in offshore and marine installations where moisture may enter the enclosure through the breather located on top of enclosure
- Drains and breathers are installed in hubs or drilled and tapped openings

### Features:

ECD284, ECD384, ECD385 and ECD15 "Universal" drains and breathers have:

- Patented labyrinth design, suitable for use in Class I, Division 1 & 2, Groups C,D and Class II, Division 1 & 2, Groups F,G areas
- Capability to pass 50 cc of water per minute and 0.2 cubic feet of air per minute at atmospheric pressure
- ECD15 and ECD385 each have a well inside the inner, threaded end to provide for accumulation of sediment without clogging when used as a drain

"Standard" ECD drains and breathers have:

- Thread-in-thread design, suitable for use in Class I, Division 1 & 2, Groups C,D; Class II, Division 1, Groups E,F,G; Class II, Division 2, Groups F,G and Class III areas
- ECD 11, 13 have capability to pass 25 cc of water per minute and .05 cubic feet of air per minute at atmospheric pressure
- ECD387 and ECD16 are a unique thread-in-shaft design for use in Class I, Division 1 & 2, Groups B,C,D; Class II, Division 1, Groups E,F,G; Class II, Division 2, Groups F,G; Class III areas. The ECD387 and ECD16 can pass 15cc of water per minute. The ECD16 can pass .01 cubic feet of air per minute

"Combination" ECD breather and drain:

- Provides ventilation to minimize condensation and drains accumulated condensate – two functions performed by a single device installed in the bottom of an enclosure or conduit system
- Have the capability to pass 25 cc of water per minute and .10 cubic feet of air per minute at atmospheric pressure
- Thread-in-thread and labyrinth design, suitable for use in Class I, Division 1 & 2, Groups C and D; Class II, Division 1 & 2, Groups F and G; and Class III areas

### Certifications and Compliances:

- NEC/CEC:  
**ECD 16, ECD387, ECD-N4D, ECD-N4B –**  
Class I, Division 1 & 2, Groups B, C, D  
Class II, Division 1, Groups E, F, G  
Class II, Division 2, Groups F, G  
Class III  
IP46 (ECD-N4D and ECD-N4B only)  
IIB + Hydrogen (ECD-N4D and ECD-N4B only)  
**ECD11, ECD13, ECD281 –**  
Class I, Division 1 & 2, Groups C, D  
Class II, Division 1, Groups E, F, G  
Class II, Division 2, Groups F, G  
Class III  
**ECD18, ECD384, ECD15, ECD385 –**  
Class I, Division 1 & 2, Groups C, D  
Class II, Division 1, Groups F, G  
Class II, Division 2, Groups F, G  
Class III  
IP42 IIB (ECD 15 only)  
**ECD284 –**  
Class I, Division 1 & 2, Group C, D  
Class II, Division 1, Groups F, G  
Class II, Division 2, Groups F, G

- UL Standard: 1203
- CSA Standard: C22.2 No. 30
- Type 4X: ECD-N4D and ECD-N4B
- ATEX Certificate # ITS07ATEX15639U

### Standard Materials:

- ECD11, ECD15, ECD281, ECD284, ECD384, ECD385 – stainless steel
- ECD13 – stainless steel with aluminum cap
- ECD16, ECD-N4D, ECD-N4B – stainless steel
- ECD387 – stainless steel
- ECD18 – stainless steel with neoprene tube

### Size Ranges:

- 1/4" to 1/2"

#### Breather



Drain

Typical installation of drain and breather in a combination motor starter

- At least 5 full threads of drain or breather must be engaged in matching female thread, taper-tapped in accordance with NEMA/EEMAC Standard FB-1, Type NTC or National Bureau of Standards Handbook H28, Part II, Table 7.6.
- These breathers and drains can be factory installed on various explosion-proof equipment. See options on applicable equipment pages for suffixes to be used.



ECD11



ECD13



ECD15



ECD16



ECD18

### Ordering Information ECD "Type 4X" Drain and Breather

Size	Drain Cat. #	Breather Cat. #
3/8	ECD38 N4D	ECD38 N4B
1/2	ECD1 N4D	ECD1 N4B

### ECD "Standard" Drain and Breather

Size	Drain Cat. #	Breather Cat. #
1/4	ECD281	
3/8	ECD387	
1/2	ECD11	ECD13

### ECD "Universal" Drain or Breather

Size	Cat. #
1/4	ECD284†
3/8	ECD384†
3/8	ECD385
1/2	ECD15
1/2	ECD16

†Shorter overall length than ECD15 and ECD385. For use in confined spaces such as panelboard assemblies.

### ECD "Combination" Drain or Breather

Size	Cat. #
1/2	ECD18

## Crouse-Hinds

by E.T.N

www.crouse-hinds.com US: 1-866-764-5454 CAN: 1-800-265-0502 Copyright© 2013 Eaton's Crouse-Hinds Business

857

## Enclosure Accessories - Drains and Breathers

### CD Series / ACD NEMA 4X Series

#### Applications:

CD Series drains are for use in conduit systems to:

- Drain accumulated condensate.
- Provide ventilation to minimize condensation.

Drains are installed in hubs or drilled and tapped openings.

#### Certifications and Compliances:

- UL Standard 514B

#### Standard Materials:

- CD bodies and nuts – steel or aluminum
- CD screen – stainless steel

#### Standard Finishes:

- Steel – electrogalvanized with chromate treatment.

#### Options:

##### Description

Copper-free aluminum construction

##### Suffix

SA

#### Ordering Information

##### Size


1/2

3/4

##### Cat. #

CD1

CD2

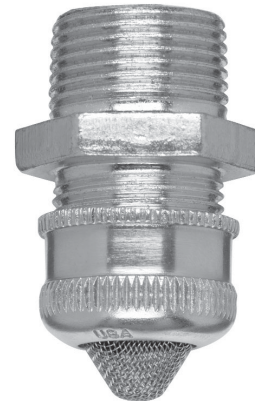

### ACD Series NEMA 4X Breather/Drain

#### ATEX and CENELEC Range

I M2 II 2GD, E Exe I & II  
(Stainless Steel & Brass only)  
II 2GD, E Exe II (Nylon version)  
CSA Cl. I, Div. 2, Groups  
A, B, C, D, Exe II

Enclosure Type 4X  
IP66

#### Applications:

- For use in enclosures to provide a method to effectively drain moisture while allowing the enclosure to breathe.

#### Features:

All NEMA 4X breather/drains offer:


- Castellated locknuts that allow moisture to pass between the enclosure and the locknut to the drain holes in the fitting.
- Available in brass, stainless steel (Type 316) or 30% glass filled nylon.
- Captive "O" ring on recess of the face of the breather/drain to optimize ingress protection.
- ATEX and CSA Certified for worldwide market acceptance.
- Available with metric or NPT threads.

#### Certifications and Compliances:

- SIRA 99 ATEX 3050U
- I M2 II 2GD, E Exe I & II (Stainless Steel & Brass only)
- II 2GD, E Exe II (Nylon only)
- CSA Class I, Division 2, Groups A, B, C & D, Exe II
- Enclosure Type 4X
- IP66

#### Operating Temperature:

- -50°C to +85°C

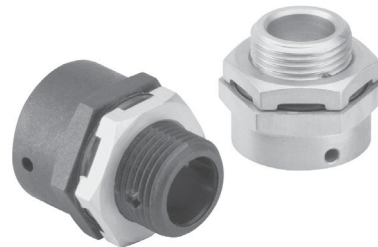

#### Ordering Information

##### Entry

##### Method

##### Material

##### Cat. #

M20

Brass

ACDPEB/M20/15

M20

Stainless Steel

ACDPES/M20/15

M20

Nylon

ACDPEN/M20/15

M25

Brass

ACDPEB/M25/15

M25

Stainless Steel

ACDPES/M25/15

M25

Nylon

ACDPEN/M25/15

1/2"

Brass

ACDPEB/050NPT/15

1/2"

Stainless Steel

ACDPES/050NPT/15

3/4"

Brass

ACDPEB/075NPT/15

3/4"

Stainless Steel

ACDPES/075NPT/15