
Catalog Number	
Notes	
Type	

Contractor Select™

EXRG

Lithonia Lighting Basics™ LED Exit

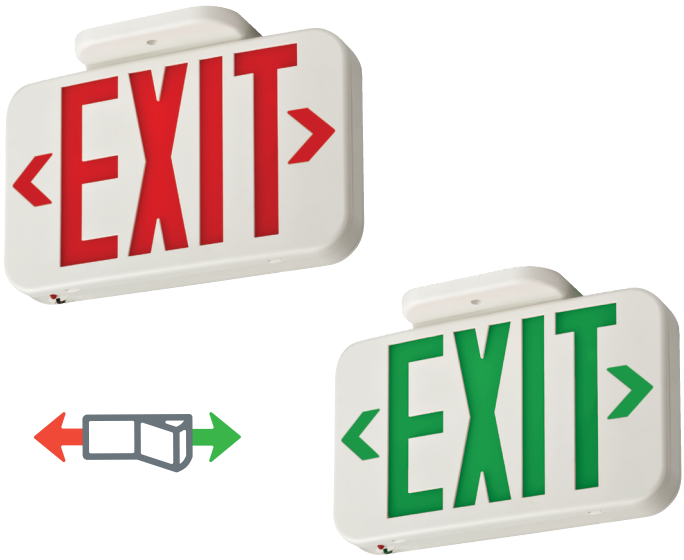

The Lithonia Lighting Basics™ EXRG Exit Sign is suitable for emergency signage applications such as stairways and hallways. This fully assembled single-face exit with extra faceplate is available in red and green letters. It's low profile makes it ideal for safely illuminated the path of egress in small spaces and can be wall or ceiling mounted. The emergency power provides 90 minutes of illumination in the event of a power loss.

FEATURES:

- Internal toggle switch for red or green letter color selection
- Test switch and status indicator for low maintenance (EL emergency models only)
- UL indoor damp location 50° to 104°F (10°C to 40°C) listed standard
- For use with Dual voltage 120/277VAC
- Internal switch for color selection

† Exit Signs Certified in the CA Title 20 Appliance Efficiency Database.

Catalog Number	UPC	Description	Supply Voltage	Input Wattage		Input Amps		Pallet Qty	Carton Qty
				120	277	120	277		
EXRG M6	00194994900658	Red/Green Exit, AC Only	120/277	1W	1W	0.09	0.09	360	6
EXRG EL M6	00194994900696	Red/Green Exit with Ni-MH backup battery	120/277	1W	1W	0.09	0.09	360	6

Accessories[1]: *Order as separate catalog number.*	
ELA WG1	Wireguard (back mount only, 13 3/4"H x 15 1/4"W x 6"D)

NOTES

1. See spec sheet ELA-WG for more information.

Specifications

INTENDED USE:
LED lighted exit signs for marking the means of egress in accordance with Life Safety Code NFPA 101. The EXRG has an internal switch that ships standard as a red exit and can be switched in the field to green. It is also packaged standard with an extra faceplate along with red and green inserts.

CONSTRUCTION:
Injection-molded, flame-retardant, high-impact, thermoplastic housing with snap-fit design components for easy installation. Universal J-box pattern.

Ships with extra faceplate to quickly convert from single to double face exit sign depending on the application. Universal chevrons are easily removed for directional indication.

Letters 6" high with 3/4" stroke, with 100 ft viewing distance rating, based on UL924 standards.

OPTICS:
The typical life of the exit LED lamp is 5 years, based on 24/7 operation.

ELECTRICAL:
Dual-voltage input 120V or 277V AC. Non-emergency (AC only without battery) or Emergency exit with battery. The emergency model includes the test switch, status indicator and rechargeable battery.

Battery: (EL models) maintenance-free Nickel metal hydride battery provides 90 minutes of emergency power.

INSTALLATION:
Top, back or end mounting capability (canopy included).

LISTINGS:
UL Listed. Meets UL 924, NFPA 101 (current Life Safety Code) , NFPA 70-NEC, FCC Title 47, Part 15, Subpart B and OSHA illumination standards. Indoor damp location 50° to 104°F (10°C to 40°C) listed standard.


WARRANTY:
2-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at:
www.acuitybrands.com/support/warranty/terms-and-conditions

All life safety equipment, including emergency lighting for path of egress must be maintained, serviced, and tested in accordance with all National Fire Protection Association (NFPA) and local codes. Failure to perform the required maintenance, service, or testing could jeopardize the safety of occupants and will void all warranties.

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

Dimensions

Length: 11.63 (29.5)
Depth: 1.63 (4.1)
Height: 7.2 (18.3)
Weight: EL: 1.6 LB
AC: 1.59 LB

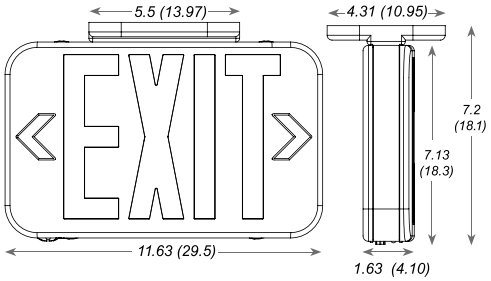

All dimensions are inches (centimeters) unless otherwise indicated.


© 2020-2024 Acuity Brands Lighting, Inc. All rights reserved. Rev. 08/21/24

Catalog Number	
Notes	
Type	

Contractor Select™

EXRG

Lithonia Lighting Basics™ LED Exit

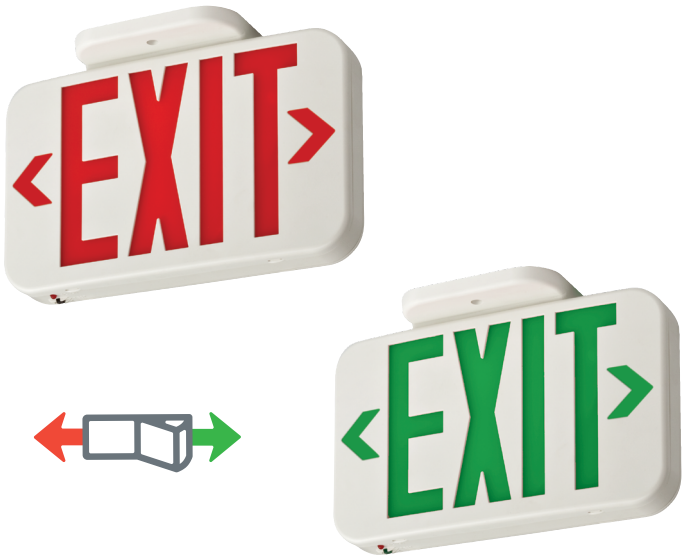

The Lithonia Lighting Basics™ EXRG Exit Sign is suitable for emergency signage applications such as stairways and hallways. This fully assembled single-face exit with extra faceplate is available in red and green letters. It's low profile makes it ideal for safely illuminated the path of egress in small spaces and can be wall or ceiling mounted. The emergency power provides 90 minutes of illumination in the event of a power loss.

FEATURES:

- Internal toggle switch for red or green letter color selection
- Test switch and status indicator for low maintenance (EL emergency models only)
- UL indoor damp location 50° to 104°F (10°C to 40°C) listed standard
- For use with Dual voltage 120/277VAC
- Internal switch for color selection

† Exit Signs Certified in the CA Title 20 Appliance Efficiency Database.

Catalog Number	UPC	Description	Supply Voltage	Input Wattage		Input Amps		Pallet Qty	Carton Qty
				120	277	120	277		
EXRG M6	00194994900658	Red/Green Exit, AC Only	120/277	1W	1W	0.09	0.09	360	6
EXRG EL M6	00194994900696	Red/Green Exit with Ni-MH backup battery	120/277	1W	1W	0.09	0.09	360	6

Accessories[1]: *Order as separate catalog number.*	
ELA WG1	Wireguard (back mount only, 13 3/4"H x 15 1/4"W x 6"D)

NOTES

1. See spec sheet ELA-WG for more information.

Specifications

INTENDED USE:
LED lighted exit signs for marking the means of egress in accordance with Life Safety Code NFPA 101. The EXRG has an internal switch that ships standard as a red exit and can be switched in the field to green. It is also packaged standard with an extra faceplate along with red and green inserts.

CONSTRUCTION:
Injection-molded, flame-retardant, high-impact, thermoplastic housing with snap-fit design components for easy installation. Universal J-box pattern.

Ships with extra faceplate to quickly convert from single to double face exit sign depending on the application. Universal chevrons are easily removed for directional indication.

Letters 6" high with 3/4" stroke, with 100 ft viewing distance rating, based on UL924 standards.

OPTICS:
The typical life of the exit LED lamp is 5 years, based on 24/7 operation.

ELECTRICAL:
Dual-voltage input 120V or 277V AC. Non-emergency (AC only without battery) or Emergency exit with battery. The emergency model includes the test switch, status indicator and rechargeable battery.

Battery: (EL models) maintenance-free Nickel metal hydride battery provides 90 minutes of emergency power.

INSTALLATION:
Top, back or end mounting capability (canopy included).

LISTINGS:
UL Listed. Meets UL 924, NFPA 101 (current Life Safety Code) , NFPA 70-NEC, FCC Title 47, Part 15, Subpart B and OSHA illumination standards. Indoor damp location 50° to 104°F (10°C to 40°C) listed standard.


WARRANTY:
2-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at:
www.acuitybrands.com/support/warranty/terms-and-conditions

All life safety equipment, including emergency lighting for path of egress must be maintained, serviced, and tested in accordance with all National Fire Protection Association (NFPA) and local codes. Failure to perform the required maintenance, service, or testing could jeopardize the safety of occupants and will void all warranties.

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

Dimensions

Length: 11.63 (29.5)
Depth: 1.63 (4.1)
Height: 7.2 (18.3)
Weight: EL: 1.6 LB
AC: 1.59 LB

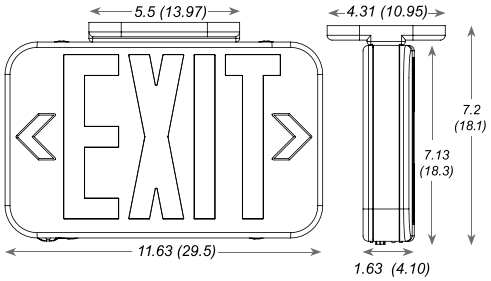

All dimensions are inches (centimeters) unless otherwise indicated.

© 2020-2024 Acuity Brands Lighting, Inc. All rights reserved. Rev. 08/21/24