




GE
Lighting

38201 - F25T12/CW/33 6PK

GE garage & basement 25 watt T12 1-pack

- Passes TCLP, which can lower disposal costs.
- 1.5 inch diameter T12 with medium bi-pin (g13) base
- 4100K cool white light appearance
- Cool white light perfect for sizable spaces
- For use in large spaces such as basements and garages
- GE garage & basement fluorescent bulbs' cool white light is perfect for illuminating sizable spaces throughout your home. Use in large open spaces in your home including finished and unfinished basements, garages and rec rooms
- Lasts 3.4 years based on 6 hours per day usage
- 33 inches long

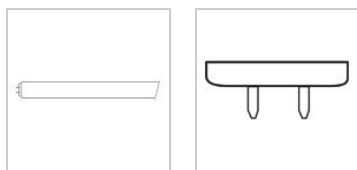

CAUTIONS & WARNINGS

Caution


- Lamp may shatter and cause injury if broken
 - Wear safety glasses and gloves when handling lamp.
 - Do not use excessive force when installing lamp.

Warning

- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.

GRAPHS & CHARTS

Graphs_Lamp Mortality

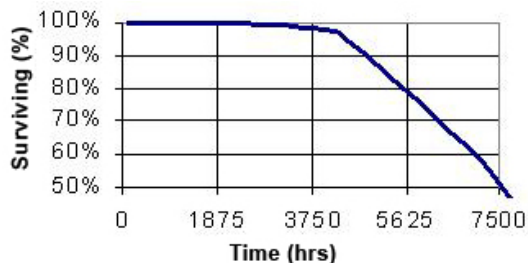

GENERAL CHARACTERISTICS

| | |
|-----------------------------------|---------------------------------------|
| Lamp Type | Linear Fluorescent - Straight |
| Bulb | Linear |
| Base | T12 |
| Rated Life | Medium Bi-Pin (G13) |
| Rated Life (instant start) @ Time | 7500.0 hrs |
| Bulb Material | 7500 h @ 3 h |
| Starting Temperature (MIN) | Soda lime |
| LEED-EB MR Credit | 10.0 °C |
| Additional Info | 4776 picograms Hg per mean lumen hour |
| Primary Application | TCLP compliant |
| | Appliance;Speciality |

PHOTOMETRIC CHARACTERISTICS

| | |
|---------------------------------|----------|
| Initial Lumens | 1860.0 |
| Mean Lumens | 1675.0 |
| Nominal Initial Lumens per Watt | 74 |
| Color Temperature | 4100.0 K |
| Color Rendering Index (CRI) | 60.0 |

ELECTRICAL CHARACTERISTICS

| | |
|---|--------|
| Wattage | 25.0 |
| Voltage | 61.0 |
| Cathode Resistance Ratio - Rh/ Rc (MAX) | 6.5 |
| Preheat Voltage (MIN) | 4.25 V |

DIMENSIONS

| | |
|------------------------------|----------------------|
| Maximum Overall Length (MOL) | 33.0000 in(838.2 mm) |
| Nominal Length | 33.000 in(838.2 mm) |
| Bulb Diameter (DIA) (MAX) | 1.590 in(40.4 mm) |
| Bulb Diameter (DIA) | 1.500 in(38.1 mm) |

PRODUCT INFORMATION

| | |
|----------------------------------|------------------|
| Product Code | 38201 |
| Description | F25T12/CW/33 6PK |
| Standard Package | BUNDLE |
| Standard Package GTIN | 00043168382014 |
| Standard Package Quantity | 24 |
| Sales Unit | Unit |
| No Of Items Per Sales Unit | 1 |
| No Of Items Per Standard Package | 24 |
| UPC | 043168980760 |




GE
Lighting

38201 - F25T12/CW/33 6PK

GE garage & basement 25 watt T12 1-pack

- Passes TCLP, which can lower disposal costs.
- 1.5 inch diameter T12 with medium bi-pin (g13) base
- 4100K cool white light appearance
- Cool white light perfect for sizable spaces
- For use in large spaces such as basements and garages
- GE garage & basement fluorescent bulbs' cool white light is perfect for illuminating sizable spaces throughout your home. Use in large open spaces in your home including finished and unfinished basements, garages and rec rooms
- Lasts 3.4 years based on 6 hours per day usage
- 33 inches long

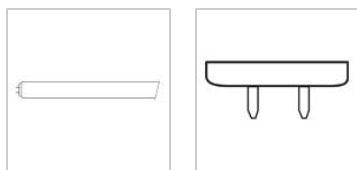

CAUTIONS & WARNINGS

Caution


- Lamp may shatter and cause injury if broken
 - Wear safety glasses and gloves when handling lamp.
 - Do not use excessive force when installing lamp.

Warning

- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.

GRAPHS & CHARTS

Graphs_Lamp Mortality

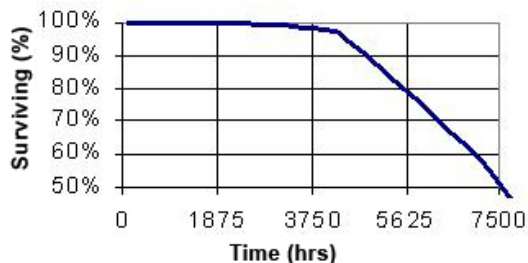

GENERAL CHARACTERISTICS

| | |
|-----------------------------------|---------------------------------------|
| Lamp Type | Linear Fluorescent - Straight |
| Bulb | Linear |
| Base | T12 |
| Rated Life | Medium Bi-Pin (G13) |
| Rated Life (instant start) @ Time | 7500.0 hrs |
| Bulb Material | 7500 h @ 3 h |
| Starting Temperature (MIN) | Soda lime |
| LEED-EB MR Credit | 10.0 °C |
| Additional Info | 4776 picograms Hg per mean lumen hour |
| Primary Application | TCLP compliant |
| | Appliance;Speciality |

PHOTOMETRIC CHARACTERISTICS

| | |
|---------------------------------|----------|
| Initial Lumens | 1860.0 |
| Mean Lumens | 1675.0 |
| Nominal Initial Lumens per Watt | 74 |
| Color Temperature | 4100.0 K |
| Color Rendering Index (CRI) | 60.0 |

ELECTRICAL CHARACTERISTICS

| | |
|---|--------|
| Wattage | 25.0 |
| Voltage | 61.0 |
| Cathode Resistance Ratio - Rh/ Rc (MAX) | 6.5 |
| Preheat Voltage (MIN) | 4.25 V |

DIMENSIONS

| | |
|------------------------------|----------------------|
| Maximum Overall Length (MOL) | 33.0000 in(838.2 mm) |
| Nominal Length | 33.000 in(838.2 mm) |
| Bulb Diameter (DIA) (MAX) | 1.590 in(40.4 mm) |
| Bulb Diameter (DIA) | 1.500 in(38.1 mm) |

PRODUCT INFORMATION

| | |
|----------------------------------|------------------|
| Product Code | 38201 |
| Description | F25T12/CW/33 6PK |
| Standard Package | BUNDLE |
| Standard Package GTIN | 00043168382014 |
| Standard Package Quantity | 24 |
| Sales Unit | Unit |
| No Of Items Per Sales Unit | 1 |
| No Of Items Per Standard Package | 24 |
| UPC | 043168980760 |