


Fusetron®

Dual-Element, Time-Delay Fuses with Indication

Class RK5 - 250 Volt

FRN-R_ID
8-60A

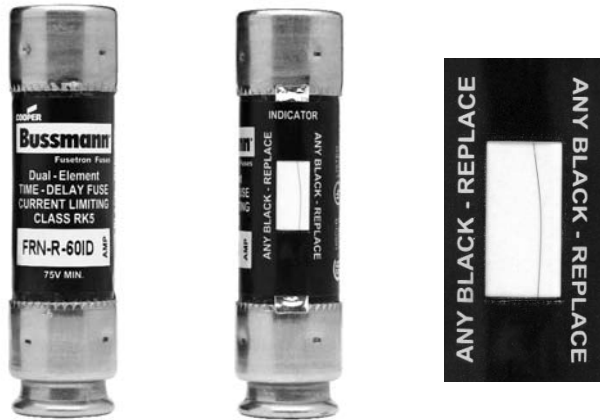

Catalog Symbol: FRN-R_ID

Current-Limiting
Dual-element, time-delay – 10 seconds (minimum) at 500% rated current (8 seconds for 0-30A sizes)

Ratings:

- Volts – 250Vac (or less)
- Amps – 8-60A
- IR – 200kA RMS Sym.
- 20kA @125Vdc

Agency Information:

CE, UL Listed, Std. 248-12, Class RK-5, Guide JDDZ, File E4273 CSA Certified, C22.2 No. 248.12, Class 1422-01, File 53787

Catalog Numbers

FRN-R-8ID	FRN-R-17 1/2ID	FRN-R-40ID
FRN-R-9ID	FRN-R-20ID	FRN-R-45ID
FRN-R-10ID	FRN-R-25ID	FRN-R-50ID
FRN-R-12ID	FRN-R-30ID	FRN-R-60ID
FRN-R-15ID	FRN-R-35ID	

Carton Quantity and Weight

Ampere Ratings	Carton Qty.	Weight*	
		Lbs.	Kg.
8-15	10	0.40	0.181
17.5-30	10	0.50	0.227
35-60	10	1.00	0.453

*Weight per carton.

General Information:

- Open fuse indication.
- Provides motor overload, ground fault and short-circuit protection.
- Helps protect motors against burnout from overloads.
- Helps protect motors against burnout from single-phasing on three-phase systems.
- Simplifies and improves blackout prevention (selective coordination).
- Dual-element fuses can be applied in circuits subject to temporary motor overloads and surge currents to provide both high performance short-circuit and overload protection.
- The overload element provides protection against low level overcurrent of overloads and will hold an overload which is five times the amp rating of the fuse for a minimum of eight seconds.

Fuse Reducers For Class R Fuses



Equipment Fuse Clips	Desired Fuse (Case) Size	Catalog Number (Pairs) 250V
60A	30A	No. 263-R
100A	30A	No. 213-R
	60A	No. 216-R
200A	60A	No. 226-R

Fuseblocks for Class R Fuses


(Clip Retaining Spring Standard, Suffix "R")
See Data Sheet 1110

Amps	Poles	Basic Catalog Number	Terminal Type (Suffix No.)				
			Screw w/		Box Lug w/	1/4" Quick-Connect	
			— Pres. Plate	— CR	— Clip CU only		
8	1	R25030-1	SR	PR	CR	COR	QR
to	2	R25030-2	SR	PR	CR	COR	—
30	3	R25030-3	SR	PR	CR	COR	—
31	1	R25060-1	—	—	CR	—	—
to	2	R25060-2	—	—	CR	—	—
60	3	R25060-3	—	—	CR	—	—


Dimensional Data - in



Time-Current Characteristic Curves—Average Melt

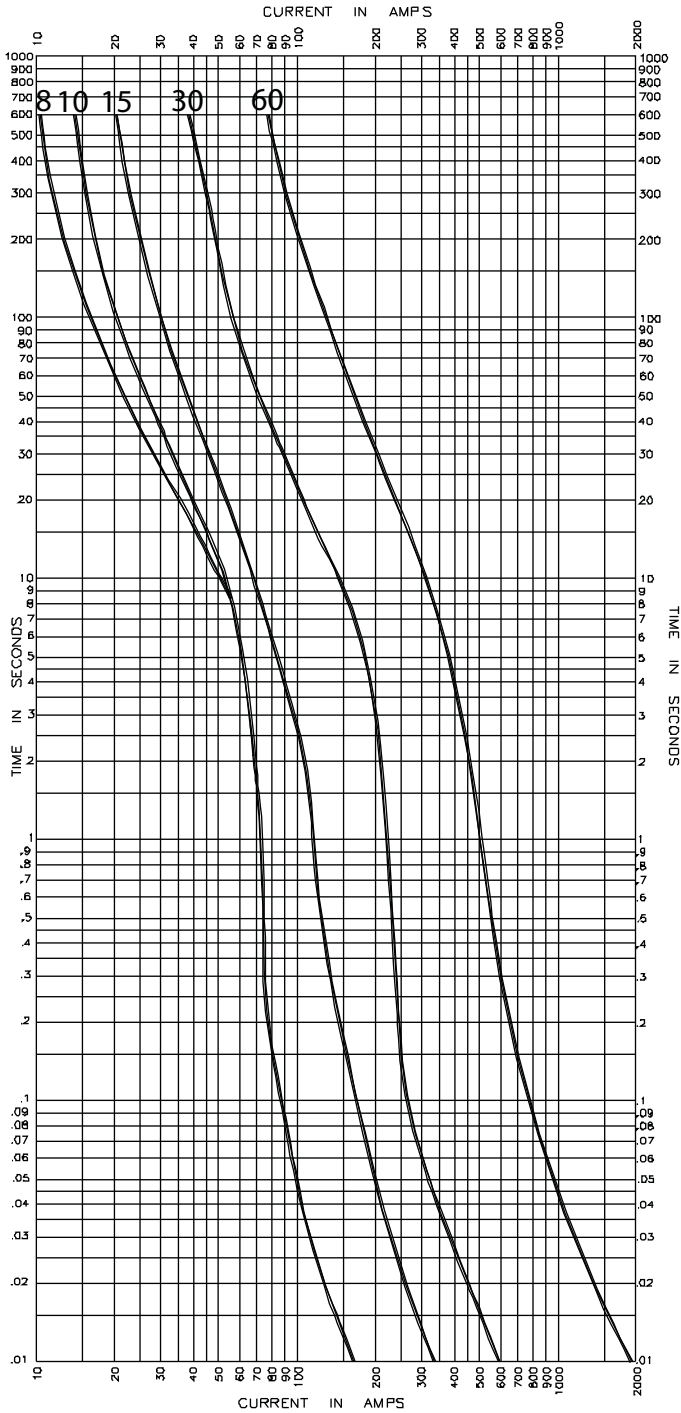

Current-Limitation Curve

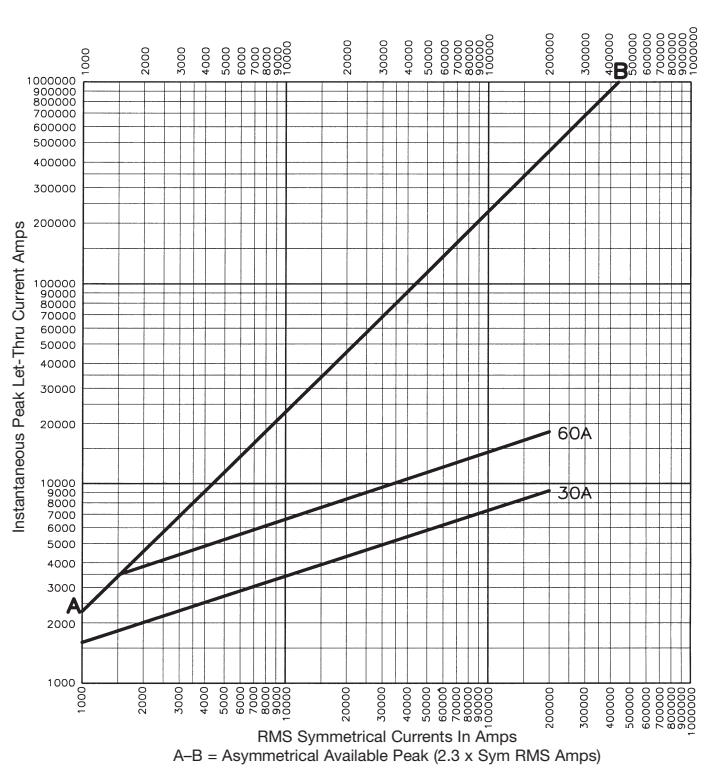

The only controlled copy of this Data Sheet is the electronic read-only version located on the Cooper Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Cooper Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

© 2009 Cooper Bussmann
 St. Louis, MO 63178
www.cooperbussmann.com