LOS2500/120

RAB



Project:	Туре:
Prepared By:	Date:

Technical Specifications

Construction

Easy Installation:

Relay and sensor all in one reduces installation cost. Compatible with program start ballasts. Not compatible with instant start ballasts. LED testing and operation indicator.

Sensor Specifications

Maximum Reliability:

Adjustable detector sensitivity for superior detection

Maximum Versatility:

Adjustable time delay. Sensor detection pattern can be customized. No minimum load requirement. Can be wired in parallel.

Time Delay:

10 seconds to 15 minutes

Adjustments:

Photo Time Sensitivity

Detection:

360° view Super Ceiling Sensor

Optical

Coverage Area:

2152sf@9'

Electrical

Incandescent Watts Switched:

2000 watts

Fluorescent Watts Switched:

2000 watts

Ratings Amps Horsepower:

16 amps 6.7 horsepower.

Power Consumption:

Negligible

Manual Switch:

None


Other

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

LOS2500/120



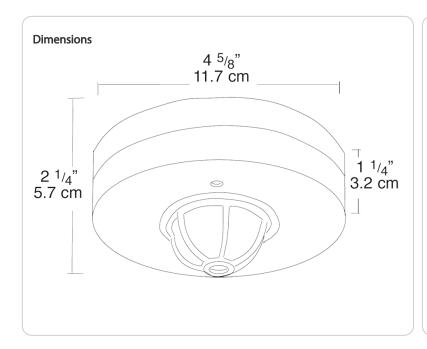

Features

Super Ceiling Sensor has 3 detectors for triple overlapping coverage to catch small movements

LED testing and operation Indicator

Maximum coverage - 360 or hallway models

Relay and sensor all in one unit reduces installation costs

Can be wired in parallel

Compatible with program start ballasts