


# LED Dimmable Recessed Retrofits

TCP's Dimmable Retrofit Kits are the perfect choice for new construction and retrofit opportunities when a sleek, integrated look is preferred.

### Limitless options for the following applications:



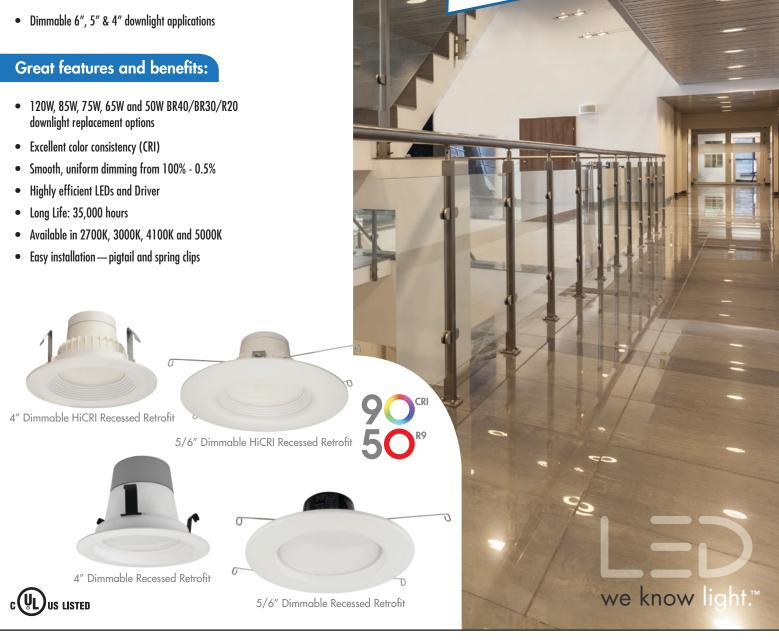







LED

35,000 hours average rated life, 120 volts

### Applications:

Ideal for dimmable 6", 5" & 4" downlight applications



Perfect for retrofit or new construction recessed downlight applications

#### **Features and Benefits**

- 5/6" unit ideal for replacing dimmable 65W, 85W and 120W incandescent alternatives in 5" and 6" recessed cans
- 4" unit ideal for replacing 50W and 75W incandescent alternatives in a 4" recessed can
- Excellent Color Consistency and CRI
- Smooth, uniform dimming

- Highly efficient LEDs and Driver
- Long Life: 35,000 hours
- UL approved for damp locations
- Easy installation and integrated trim
- Shatter Resistant



Specifications				
	14W	11W	10W	9W
Recessed Downlight Size:	5", 6"	5", 6"	4"	4"
Input Line Voltage:	120 VAC	120 VAC	120 VAC	120 VAC
Input Power	14 W	11 W	10 W	9 W
Input Line Frequency	50/60HZ	50/60HZ	50/60HZ	50/60HZ
Lamp Life (Rated)	35,000 hrs	35,000 hrs	35,000 hrs	35,000 hrs
Minimum Starting Temp	-30℃	-30℃	-30℃	-30℃

IC-rated for direct contact with insulation



 $LDRACCGU24-GU24\ Adapter$ 





LED10DR427K LED10DR430K LED10DR435K LED10DR441K LED10DR450K





L9DR4D3527K95 L9DR4D3530K95



 $5_{\frac{\text{YEAR}}{\text{WARRANTY}}^*}$ 

\*Based on 12 hours use per day





### LED Dimmable Recessed Retrofits Specifications

**Smooth Uniform Dimming** 

٠	Item#	ENERGY STAR rated	Description	Life Hours	Replacement	Voltage	Wattage	Lumens	LPW	ССТ	CRI	Case Qty
	Downlight Retrofits o	ompatible with	5/6" recessed cans									
its	LED14DR5627K LED14DR5630K		D 14W 5/6" Recessed Downlight - 2700K D 14W 5/6" Recessed Downlight - 3000K	35,000 35,000	120 120	120 120	14 14	1250 1300	89.3 92.9	2700K 3000K	80 80	6 6
Retrofits	LED14DR5641K		D 14W 5/6" Recessed Downlight - 4100K	35,000	120	120	14	1300	92.9	4100K	80	6
e t	LED14DR5650K	* LEI	D 14W 5/6" Recessed Downlight - 5000K	35,000	120	120	14	1350	96.4	5000K	80	6
	LED11DR5627K		D 11W 5/6" Recessed Downlight - 2700K	35,000	85	120	11	800	72.7	2700K	80	6
Se	LED11DR5630K		D 11W 5/6" Recessed Downlight - 3000K	35,000	85	120	11	850	77.3	3000K	80	6
es	LED11DR5641K		D 11W 5/6" Recessed Downlight - 4100K	35,000	85	120	11	900	81.8	4100K	80	6
Recessed	LED11DR5650K	* LEI	D 11W 5/6" Recessed Downlight - 5000K	35,000	85	120	11	950	86.4	5000K	80	6
5/6" F	Hi CRI Downlight Ret	rofits compatib	le with 5/6" recessed cans									
5/	L11DR56D3527K95*		D 11W 5/6" Recessed Downlight - 2700K	35,000	65	120	11	700	63.6	2700K	90	6
	L11DR56D3530K95*	*+ * LEI	D 11W 5/6" Recessed Downlight - 3000K	35,000	65	120	11	750	68.2	3000K	90	6
	Downlight Retrofits c	ompatible with	4" recessed cans									
Retrofits	LED10DR427K		D 10W 4" Recessed Downlight - 2700K	35,000	75	120	10	750	75.0	2700K	80	6
5	LED10DR430K		D 10W 4" Recessed Downlight - 3000K	35,000	75	120	10	750	75.0	3000K	80	6
Set .	LED10DR435K		D 10W 4" Recessed Downlight - 3500K	35,000	75	120	10	620	62.0	3500K	80	6
	LED10DR441K	LEI	D 10W 4" Recessed Downlight - 4100K	35,000	75 75	120	10	800	80.0	4100K	80	6
Se	LED10DR450K	^ LEI	D 10W 4" Recessed Downlight - 5000K	35,000	75	120	10	800	80.0	5000K	80	6
Recessed	Hi CRI Downlight Retrofits compatible with 4" recessed cans											
	L9DR4D3527K95*+	* LEI	D 9W 4" Recessed Downlight - 2700K	35,000	50	120	9	550	61.1	2700K	90	6
<b>,</b>	L9DR4D3530K95*+	* LEI	D 9W 4" Recessed Downlight - 3000K	35,000	50	120	9	550	61.1	3000K	90	6
	Accessory											
	LDRACCGU24	GU	24 Adapter									

<sup>\*</sup> JA8 Compliant





<sup>+</sup>All Plastic Body

## CREATING BEAUTY

Thanks to our cutting edge technology and manufacturing expertise, we have shipped billions of high quality lamps and our integrated technology and manufacturing provides expedited time-to-market. With TCP, you can count on unique lighting products designed to meet very specific needs—lighting that generates beauty with every flip of the switch.






# LED Dimmable Recessed Retrofits

TCP's Dimmable Retrofit Kits are the perfect choice for new construction and retrofit opportunities when a sleek, integrated look is preferred.

### Limitless options for the following applications:

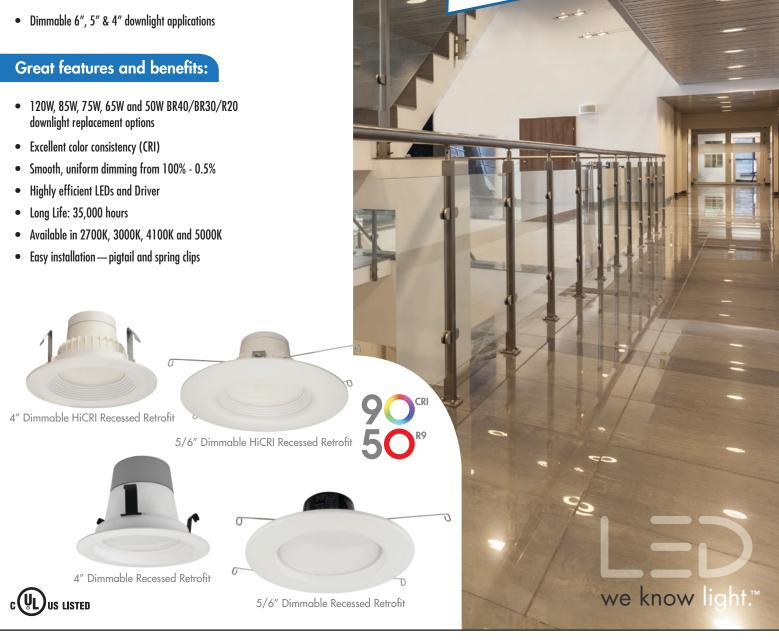









LED

35,000 hours average rated life, 120 volts

### Applications:

Ideal for dimmable 6", 5" & 4" downlight applications



Perfect for retrofit or new construction recessed downlight applications

#### **Features and Benefits**

- 5/6" unit ideal for replacing dimmable 65W, 85W and 120W incandescent alternatives in 5" and 6" recessed cans
- 4" unit ideal for replacing 50W and 75W incandescent alternatives in a 4" recessed can
- Excellent Color Consistency and CRI
- Smooth, uniform dimming

- Highly efficient LEDs and Driver
- Long Life: 35,000 hours
- UL approved for damp locations
- Easy installation and integrated trim
- Shatter Resistant



Specifications				
	14W	11W	10W	9W
Recessed Downlight Size:	5", 6"	5", 6"	4"	4"
Input Line Voltage:	120 VAC	120 VAC	120 VAC	120 VAC
Input Power	14 W	11 W	10 W	9 W
Input Line Frequency	50/60HZ	50/60HZ	50/60HZ	50/60HZ
Lamp Life (Rated)	35,000 hrs	35,000 hrs	35,000 hrs	35,000 hrs
Minimum Starting Temp	-30℃	-30℃	-30℃	-30℃

IC-rated for direct contact with insulation



 $LDRACCGU24-GU24\ Adapter$ 





LED10DR427K LED10DR430K LED10DR435K LED10DR441K LED10DR450K





L9DR4D3527K95 L9DR4D3530K95



 $5_{\frac{\text{YEAR}}{\text{WARRANTY}}^*}$ 

\*Based on 12 hours use per day





### LED Dimmable Recessed Retrofits Specifications

**Smooth Uniform Dimming** 

٠	Item#	ENERGY STAR rated	Description	Life Hours	Replacement	Voltage	Wattage	Lumens	LPW	ССТ	CRI	Case Qty
	Downlight Retrofits o	ompatible with	5/6" recessed cans									
its	LED14DR5627K LED14DR5630K		D 14W 5/6" Recessed Downlight - 2700K D 14W 5/6" Recessed Downlight - 3000K	35,000 35,000	120 120	120 120	14 14	1250 1300	89.3 92.9	2700K 3000K	80 80	6 6
Retrofits	LED14DR5641K		D 14W 5/6" Recessed Downlight - 4100K	35,000	120	120	14	1300	92.9	4100K	80	6
e t	LED14DR5650K	* LEI	D 14W 5/6" Recessed Downlight - 5000K	35,000	120	120	14	1350	96.4	5000K	80	6
	LED11DR5627K		D 11W 5/6" Recessed Downlight - 2700K	35,000	85	120	11	800	72.7	2700K	80	6
Se	LED11DR5630K		D 11W 5/6" Recessed Downlight - 3000K	35,000	85	120	11	850	77.3	3000K	80	6
es	LED11DR5641K		D 11W 5/6" Recessed Downlight - 4100K	35,000	85	120	11	900	81.8	4100K	80	6
Recessed	LED11DR5650K	* LEI	D 11W 5/6" Recessed Downlight - 5000K	35,000	85	120	11	950	86.4	5000K	80	6
5/6" F	Hi CRI Downlight Ret	rofits compatib	le with 5/6" recessed cans									
5/	L11DR56D3527K95*		D 11W 5/6" Recessed Downlight - 2700K	35,000	65	120	11	700	63.6	2700K	90	6
	L11DR56D3530K95*	*+ * LEI	D 11W 5/6" Recessed Downlight - 3000K	35,000	65	120	11	750	68.2	3000K	90	6
	Downlight Retrofits c	ompatible with	4" recessed cans									
Retrofits	LED10DR427K		D 10W 4" Recessed Downlight - 2700K	35,000	75	120	10	750	75.0	2700K	80	6
5	LED10DR430K		D 10W 4" Recessed Downlight - 3000K	35,000	75	120	10	750	75.0	3000K	80	6
Set .	LED10DR435K		D 10W 4" Recessed Downlight - 3500K	35,000	75	120	10	620	62.0	3500K	80	6
	LED10DR441K	LEI	D 10W 4" Recessed Downlight - 4100K	35,000	75 75	120	10	800	80.0	4100K	80	6
Se	LED10DR450K	^ LEI	D 10W 4" Recessed Downlight - 5000K	35,000	75	120	10	800	80.0	5000K	80	6
Recessed	Hi CRI Downlight Retrofits compatible with 4" recessed cans											
	L9DR4D3527K95*+	* LEI	D 9W 4" Recessed Downlight - 2700K	35,000	50	120	9	550	61.1	2700K	90	6
<b>,</b>	L9DR4D3530K95*+	* LEI	D 9W 4" Recessed Downlight - 3000K	35,000	50	120	9	550	61.1	3000K	90	6
	Accessory											
	LDRACCGU24	GU	24 Adapter									

<sup>\*</sup> JA8 Compliant





<sup>+</sup>All Plastic Body

## CREATING BEAUTY

Thanks to our cutting edge technology and manufacturing expertise, we have shipped billions of high quality lamps and our integrated technology and manufacturing provides expedited time-to-market. With TCP, you can count on unique lighting products designed to meet very specific needs—lighting that generates beauty with every flip of the switch.

