



# ESSENTIAL SERIES

GENERAL PURPOSE LED BULBS

## KT-LED6A19-O-8XX-ND

REPLACEMENT LAMP

### DESCRIPTION

6W A19 Lamp | 2700–5000K | > 80 CRI | Omni-Directional



**LAMP TYPE:** A19

**BASE TYPE:** E26 (Medium)

**WATTAGE:** 6W

**COLOR TEMPERATURE:** 2700–5000K

**COLOR RENDERING INDEX (CRI):** > 80

**WARRANTY:** 3 Years

**RATED LIFE:** L70 (15,000 Hours)



### TYPICAL APPLICATIONS

- Table, desk, and floor lamps
- Wall sconces
- Surface-mount ceiling fixtures
- General lighting
- Pendant lights

### PRODUCT FEATURES

- Energy efficient, 80%+ energy savings over legacy equivalents
- Lower heat generation than legacy equivalents
- Smooth, diffused lens for comfortable glare-free performance
- Durable plastic housing lowers the risk for breakage
- Long life minimizes replacement and maintenance costs
- Suitable for use in damp locations
- UL enclosed rated, suitable for use in totally enclosed luminaires
- Operating temperature range –4°F/–20°C to 95°F/35°C
- PF > 0.60
- ANSI compliant construction ensures fitment for intended applications
- Meets Energy Star requirements
- UL Listed
- Complies with Part 15 of FCC


### ELECTRICAL AND PERFORMANCE SPECIFICATIONS

| Keystone Catalog Number | Description                             | Color Temp | Input Voltage | Rated Lamp Wattage | Legacy Equivalent Wattage | Base Type | Lumens | CRI  | Beam Angle | Dimmable | Efficacy |
|-------------------------|---|------------|---------------|--------------------|---------------------------|-----------|--------|------|------------|----------|----------|
| KT-LED6A19-O-827-ND     | A19 bulb; Omni-directional; Non-dimming | 2700K      | 120V          | 6W                 | 40W halogen               | E26       | 480 lm | > 80 | 230°       | No       | 80 lm/W  |
| KT-LED6A19-O-830-ND     | A19 bulb; Omni-directional; Non-dimming | 3000K      | 120V          | 6W                 | 40W halogen               | E26       | 480 lm | > 80 | 230°       | No       | 80 lm/W  |
| KT-LED6A19-O-850-ND     | A19 bulb; Omni-directional; Non-dimming | 5000K      | 120V          | 6W                 | 40W halogen               | E26       | 480 lm | > 80 | 230°       | No       | 80 lm/W  |

## KT-LED6A19-O-8XX-ND

### REPLACEMENT LAMP

#### PHYSICAL CHARACTERISTICS

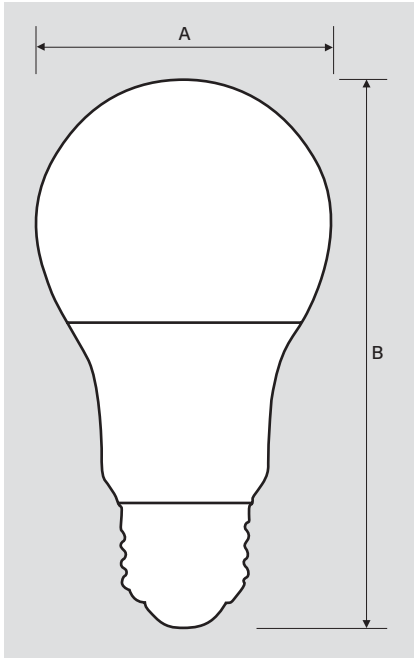

#### LAMP DIMENSIONS

|              |       |
|--------------|-------|
| A (Diameter) | 2.36" |
| B (Length)   | 4.33" |

BASE TYPE: E26 (Medium)

#### PACKAGING

|                   |                       |
|-------------------|-----------------------|
| Carton Quantity   | 60 pcs                |
| Carton Dimensions | 15.55" × 13.07" × 10" |
| Carton Weight     | 9.7 lbs               |

#### ORDERING INFORMATION

| ORDER CODE          | CARTON QUANTITY | ITEM STATUS | EASY CODE | UPC          |
|---------------------|-----------------|-------------|-----------|--------------|
| KT-LED6A19-O-827-ND | 60 pcs          | Active      | IGQ-88    | 843654126340 |
| KT-LED6A19-O-830-ND | 60 pcs          | Active      | MFV-15    | 843654126357 |
| KT-LED6A19-O-850-ND | 60 pcs          | Active      | MWP-90    | 843654126364 |

#### CATALOG NUMBER BREAKDOWN

## KT-LED6A19-O-8XX-ND

1 2 3 4 5 6 7 8

- 1 Keystone Technologies
- 2 LED Lamp
- 3 Wattage
- 4 Lamp Shape
- 5 Omni-Directional
- 6 800 Series
- 7 Color Temperature
- 8 Non-Dimming



# ESSENTIAL SERIES

GENERAL PURPOSE LED BULBS

## KT-LED6A19-O-8XX-ND

REPLACEMENT LAMP

### DESCRIPTION

6W A19 Lamp | 2700–5000K | > 80 CRI | Omni-Directional



**LAMP TYPE:** A19

**BASE TYPE:** E26 (Medium)

**WATTAGE:** 6W

**COLOR TEMPERATURE:** 2700–5000K

**COLOR RENDERING INDEX (CRI):** > 80

**WARRANTY:** 3 Years

**RATED LIFE:** L70 (15,000 Hours)



### TYPICAL APPLICATIONS

- Table, desk, and floor lamps
- Wall sconces
- Surface-mount ceiling fixtures
- General lighting
- Pendant lights

### PRODUCT FEATURES

- Energy efficient, 80%+ energy savings over legacy equivalents
- Lower heat generation than legacy equivalents
- Smooth, diffused lens for comfortable glare-free performance
- Durable plastic housing lowers the risk for breakage
- Long life minimizes replacement and maintenance costs
- Suitable for use in damp locations
- UL enclosed rated, suitable for use in totally enclosed luminaires
- Operating temperature range –4°F/–20°C to 95°F/35°C
- PF > 0.60
- ANSI compliant construction ensures fitment for intended applications
- Meets Energy Star requirements
- UL Listed
- Complies with Part 15 of FCC


### ELECTRICAL AND PERFORMANCE SPECIFICATIONS

| Keystone Catalog Number | Description                             | Color Temp | Input Voltage | Rated Lamp Wattage | Legacy Equivalent Wattage | Base Type | Lumens | CRI  | Beam Angle | Dimmable | Efficacy |
|-------------------------|---|------------|---------------|--------------------|---------------------------|-----------|--------|------|------------|----------|----------|
| KT-LED6A19-O-827-ND     | A19 bulb; Omni-directional; Non-dimming | 2700K      | 120V          | 6W                 | 40W halogen               | E26       | 480 lm | > 80 | 230°       | No       | 80 lm/W  |
| KT-LED6A19-O-830-ND     | A19 bulb; Omni-directional; Non-dimming | 3000K      | 120V          | 6W                 | 40W halogen               | E26       | 480 lm | > 80 | 230°       | No       | 80 lm/W  |
| KT-LED6A19-O-850-ND     | A19 bulb; Omni-directional; Non-dimming | 5000K      | 120V          | 6W                 | 40W halogen               | E26       | 480 lm | > 80 | 230°       | No       | 80 lm/W  |

## KT-LED6A19-O-8XX-ND

### REPLACEMENT LAMP

#### PHYSICAL CHARACTERISTICS

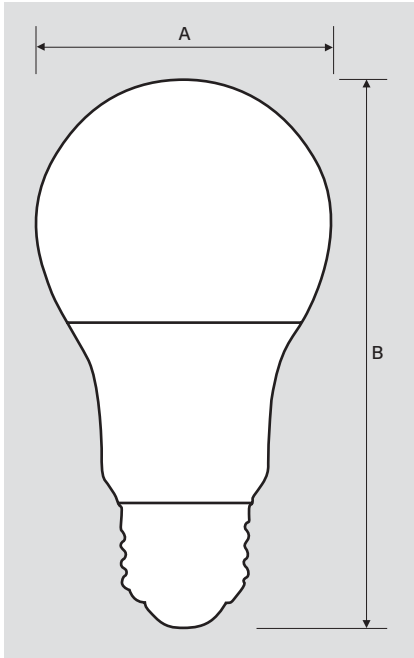

#### LAMP DIMENSIONS

|              |       |
|--------------|-------|
| A (Diameter) | 2.36" |
| B (Length)   | 4.33" |

BASE TYPE: E26 (Medium)

#### PACKAGING

|                   |                       |
|-------------------|-----------------------|
| Carton Quantity   | 60 pcs                |
| Carton Dimensions | 15.55" x 13.07" x 10" |
| Carton Weight     | 9.7 lbs               |

#### ORDERING INFORMATION

| ORDER CODE          | CARTON QUANTITY | ITEM STATUS | EASY CODE | UPC          |
|---------------------|-----------------|-------------|-----------|--------------|
| KT-LED6A19-O-827-ND | 60 pcs          | Active      | IGQ-88    | 843654126340 |
| KT-LED6A19-O-830-ND | 60 pcs          | Active      | MFV-15    | 843654126357 |
| KT-LED6A19-O-850-ND | 60 pcs          | Active      | MWP-90    | 843654126364 |

#### CATALOG NUMBER BREAKDOWN

## KT-LED6A19-O-8XX-ND

1 2 3 4 5 6 7 8

- 1 Keystone Technologies
- 2 LED Lamp
- 3 Wattage
- 4 Lamp Shape
- 5 Omni-Directional
- 6 800 Series
- 7 Color Temperature
- 8 Non-Dimming