la legrand


DIMMERS & FAN SPEED CONTROLS

Catalog Numbering System





All Dimmers and Fan Speed Controls use an easy-to-understand catalog numbering system:

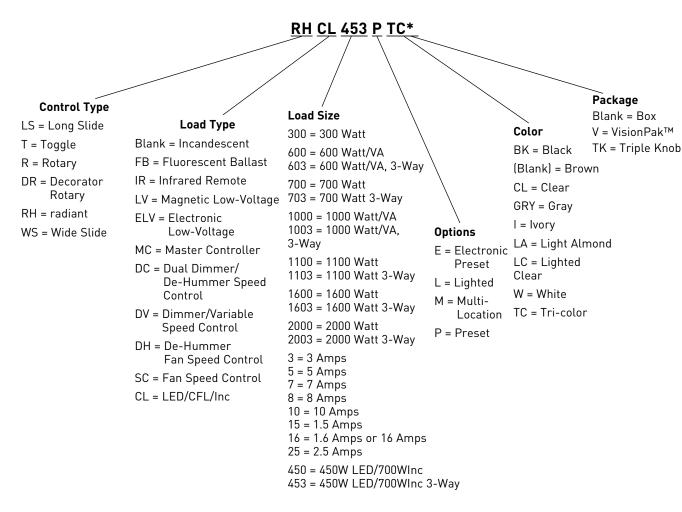


WS703PW = Wide Slide, Incandescent, 700# 3-Way, Preset in White
LS600LA = Decorator-style Long Slide Dimmer, Incandescent, 600W, Light Almond, in a Box
WSSC53PWV = Wide Slide, Fan Speed Control, 5 Amp, White, in a VisionPak

Many Dimmers & Fan Speed Controls are available boxed or VisionPak™ clam-shell packaging for high-impact merchandising. Please see the Catalog Numbering System above or specific charts for ordering information.



RESIDENTIAL & LIGHT COMMERCIAL DIMMERS & FAN SPEED CONTROLS

LS Series Dimmers



CATALOG NUMBER						
SINGLE POLE	THREE-WAY	DESCRIPTION	RATINGS	COLOR		
600W INCANDESCENT SLIDE DIMMERS*						
LS600I				lvory		
LS600W				White		
LS600		Non-Preset	120V, 600W max.	Brown		
LS600BK				Black		
LS600LA				Light Almond		
LS600PI	LS603PI			lvory		
LS600PW	LS603PW			White		
LS600P	LS603P	Preset	120V, 600W max.	Brown		
LS600PBK	LS603PBK			Black		
LS600PLA	LS603PLA			Light Almond		
1000W INCANDES	CENT SLIDE DIMM	ERS*				
LS1000I				lvory		
LS1000W				White		
LS1000		Non-Preset	120V, 1000W max.	Brown		
LS1000BK				Black		
LS1000LA				Light Almond		
LS1000PI	LS1003PI			lvory		
LS1000PW	LS1003PW			White		
LS1000P	LS1003P	Preset	120V, 1000W max.	Brown		
LS1000PBK	LS1003PBK			Black		
LS1000PLA	LS1003PLA			Light Almond		
600VA MAGNETIC	LOW-VOLTAGE SLI	IDE DIMMERS**				
LSLV600I				lvory		
LSLV600W				White		
LSLV600		Non-Preset	120V, 600VA max.	Brown		
LSLV600BK				Black		
LSLV600LA				Light Almond		
LSLV600PI	LSLV603PI			lvory		
LSLV600PW	LSLV603PW			White		
LSLV600P	LSLV603P	Preset	120V, 600VA max.	Brown		
LSLV600PBK	LSLV603PBK			Black		
LSLV600PLA	LSLV603PLA			Light Almond		

Features

- Ergonomic design and solid, quality feel combine for smooth, easy operation and precise control.
- Electromagnetic and radio-frequency interference protection built in.
- Sleek, sculpted contemporary design. No dirt-catching crevices.
- Tough, impact-resistant thermoplastic housing makes it a perfect choice for new home construction. Matching, unbreakable TradeMaster® wall plate available for all models.
- Preset ON/OFF switch automatically returns controlled lights to preset level without readjusting dimmer setting.
- Exclusive, screw-pressure-plate back wire terminals save time, space and money. Designed for 12 and 14 gauge wire, stranded or solid. No-wire-lead design eliminates wire nuts.
- Superior heat management.
- No de-rating on 600W units.
- Patented Snap-In Light Module (sold separately) transforms the dimmer into an illuminated dimmer. See Page 0-10 for information.

	FINS REMOVED			
MAX. LOAD RATING	ONE SIDE	TWO SIDE		
DE-RATING CHART				
LS600, LS603	No De-Rating Required			
LS1000P, LS1003P	900W	750W		
LS1000	850W	700W		

For wiring diagrams, see Page U-22.

^{*}Available in VisionPak $^{\text{\scriptsize M}}$ packaging, add "V" to Catalog Number. Example: LS600IV.

^{**}Available in boxed packaging only.

la legrand


DIMMERS & FAN SPEED CONTROLS

Catalog Numbering System





All Dimmers and Fan Speed Controls use an easy-to-understand catalog numbering system:

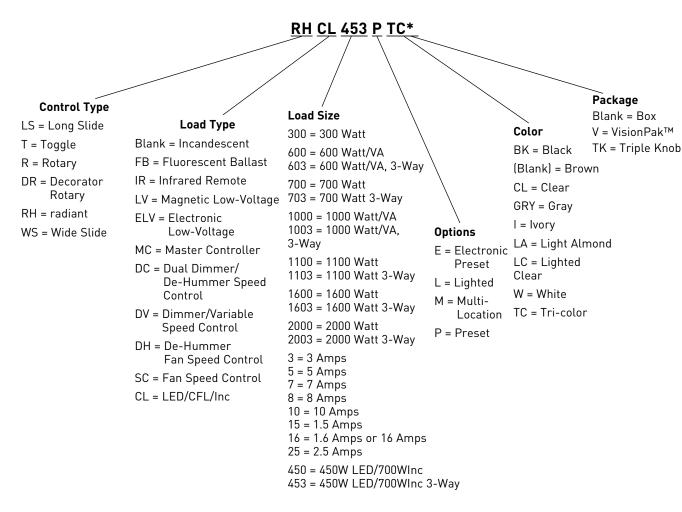


WS703PW = Wide Slide, Incandescent, 700# 3-Way, Preset in White
LS600LA = Decorator-style Long Slide Dimmer, Incandescent, 600W, Light Almond, in a Box
WSSC53PWV = Wide Slide, Fan Speed Control, 5 Amp, White, in a VisionPak

Many Dimmers & Fan Speed Controls are available boxed or VisionPak™ clam-shell packaging for high-impact merchandising. Please see the Catalog Numbering System above or specific charts for ordering information.



RESIDENTIAL & LIGHT COMMERCIAL DIMMERS & FAN SPEED CONTROLS

LS Series Dimmers



CATALOG NUMBER						
SINGLE POLE	THREE-WAY	DESCRIPTION	RATINGS	COLOR		
600W INCANDESCENT SLIDE DIMMERS*						
LS600I				lvory		
LS600W				White		
LS600		Non-Preset	120V, 600W max.	Brown		
LS600BK				Black		
LS600LA				Light Almond		
LS600PI	LS603PI			lvory		
LS600PW	LS603PW			White		
LS600P	LS603P	Preset	120V, 600W max.	Brown		
LS600PBK	LS603PBK			Black		
LS600PLA	LS603PLA			Light Almond		
1000W INCANDES	CENT SLIDE DIMM	ERS*				
LS1000I				lvory		
LS1000W				White		
LS1000		Non-Preset	120V, 1000W max.	Brown		
LS1000BK				Black		
LS1000LA				Light Almond		
LS1000PI	LS1003PI			lvory		
LS1000PW	LS1003PW			White		
LS1000P	LS1003P	Preset	120V, 1000W max.	Brown		
LS1000PBK	LS1003PBK			Black		
LS1000PLA	LS1003PLA			Light Almond		
600VA MAGNETIC	LOW-VOLTAGE SLI	IDE DIMMERS**				
LSLV600I				lvory		
LSLV600W				White		
LSLV600		Non-Preset	120V, 600VA max.	Brown		
LSLV600BK				Black		
LSLV600LA				Light Almond		
LSLV600PI	LSLV603PI			lvory		
LSLV600PW	LSLV603PW			White		
LSLV600P	LSLV603P	Preset	120V, 600VA max.	Brown		
LSLV600PBK	LSLV603PBK			Black		
LSLV600PLA	LSLV603PLA			Light Almond		

Features

- Ergonomic design and solid, quality feel combine for smooth, easy operation and precise control.
- Electromagnetic and radio-frequency interference protection built in.
- Sleek, sculpted contemporary design. No dirt-catching crevices.
- Tough, impact-resistant thermoplastic housing makes it a perfect choice for new home construction. Matching, unbreakable TradeMaster® wall plate available for all models.
- Preset ON/OFF switch automatically returns controlled lights to preset level without readjusting dimmer setting.
- Exclusive, screw-pressure-plate back wire terminals save time, space and money. Designed for 12 and 14 gauge wire, stranded or solid. No-wire-lead design eliminates wire nuts.
- Superior heat management.
- No de-rating on 600W units.
- Patented Snap-In Light Module (sold separately) transforms the dimmer into an illuminated dimmer. See Page 0-10 for information.

	FINS REMOVED			
MAX. LOAD RATING	ONE SIDE	TWO SIDE		
DE-RATING CHART				
LS600, LS603	No De-Rating Required			
LS1000P, LS1003P	900W	750W		
LS1000	850W	700W		

For wiring diagrams, see Page U-22.

^{*}Available in VisionPak $^{\text{\scriptsize M}}$ packaging, add "V" to Catalog Number. Example: LS600IV.

^{**}Available in boxed packaging only.