


DIMMERS & FAN SPEED CONTROLS

Catalog Numbering System



All Dimmers and Fan Speed Controls use an easy-to-understand catalog numbering system:

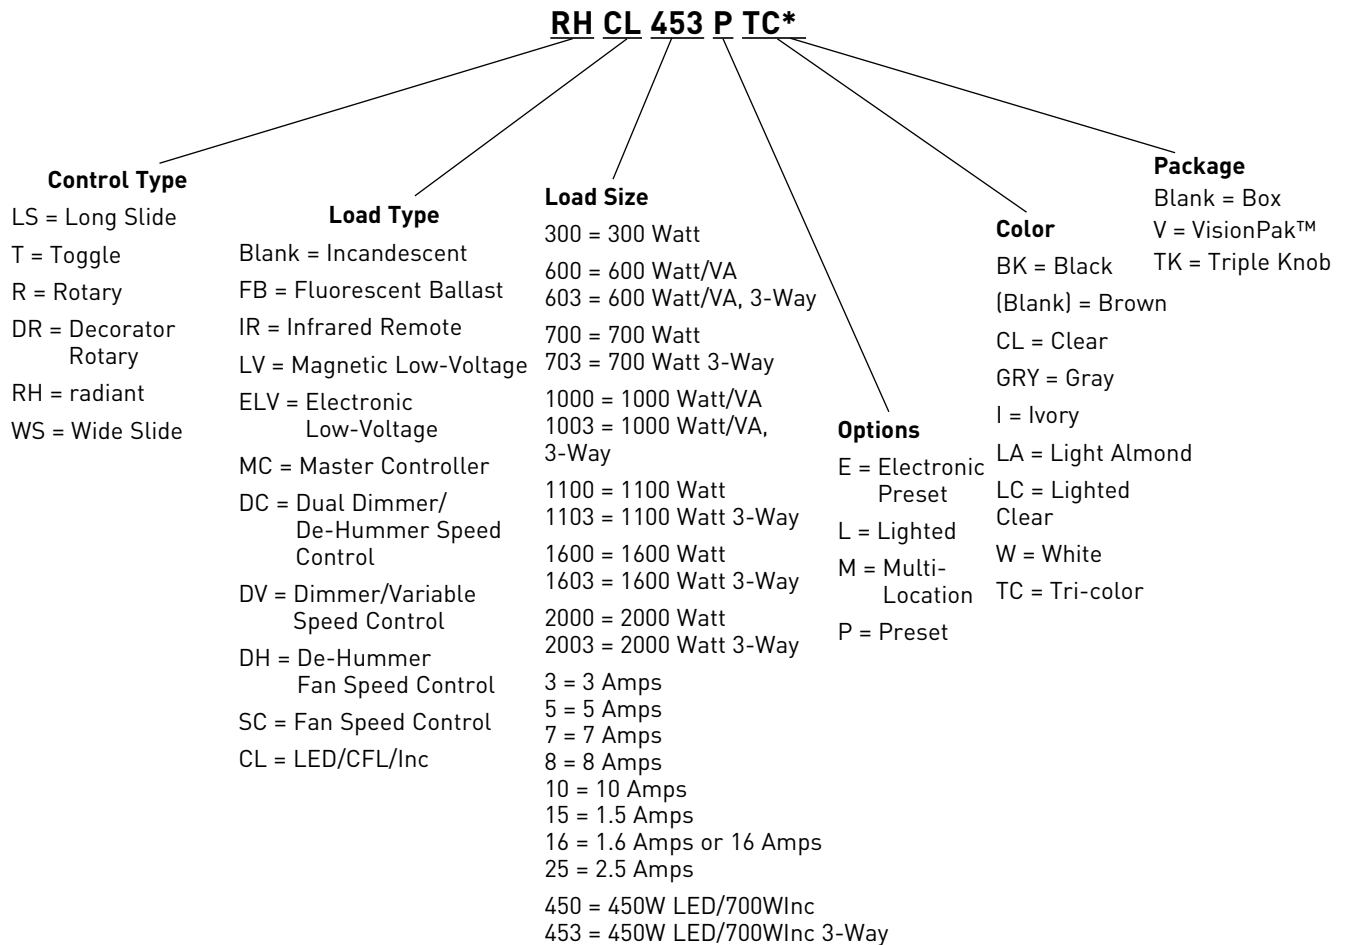

WS703PW = Wide Slide, Incandescent, 700# 3-Way, Preset in White

LS600LA = Decorator-style Long Slide Dimmer, Incandescent, 600W, Light Almond, in a Box

WS53PWV = Wide Slide, Fan Speed Control, 5 Amp, White, in a VisionPak


Many Dimmers & Fan Speed Controls are available boxed or VisionPak™ clam-shell packaging for high-impact merchandising.

Please see the Catalog Numbering System above or specific charts for ordering information.

All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.

RESIDENTIAL & LIGHT COMMERCIAL DIMMERS & FAN SPEED CONTROLS

LS Series Dimmers

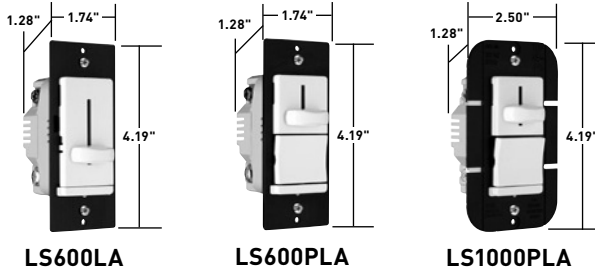

| CATALOG NUMBER | | DESCRIPTION | RATINGS | COLOR |
|---------------------------------------------------|------------|-------------|------------------|--------------|
| SINGLE POLE | THREE-WAY | | | |
| 600W INCANDESCENT SLIDE DIMMERS* | | | | |
| LS600I | | Non-Preset | 120V, 600W max. | Ivory |
| LS600W | | | | White |
| LS600 | | | | Brown |
| LS600BK | | | | Black |
| LS600LA | | | | Light Almond |
| LS600PI | LS603PI | Preset | 120V, 600W max. | Ivory |
| LS600PW | LS603PW | | | White |
| LS600P | LS603P | | | Brown |
| LS600PBK | LS603PBK | | | Black |
| LS600PLA | LS603PLA | | | Light Almond |
| | | | | |
| 1000W INCANDESCENT SLIDE DIMMERS* | | | | |
| LS1000I | | Non-Preset | 120V, 1000W max. | Ivory |
| LS1000W | | | | White |
| LS1000 | | | | Brown |
| LS1000BK | | | | Black |
| LS1000LA | | | | Light Almond |
| LS1000PI | LS1003PI | Preset | 120V, 1000W max. | Ivory |
| LS1000PW | LS1003PW | | | White |
| LS1000P | LS1003P | | | Brown |
| LS1000PBK | LS1003PBK | | | Black |
| LS1000PLA | LS1003PLA | | | Light Almond |
| | | | | |
| 600VA MAGNETIC LOW-VOLTAGE SLIDE DIMMERS** | | | | |
| LSLV600I | | Non-Preset | 120V, 600VA max. | Ivory |
| LSLV600W | | | | White |
| LSLV600 | | | | Brown |
| LSLV600BK | | | | Black |
| LSLV600LA | | | | Light Almond |
| LSLV600PI | LSLV603PI | Preset | 120V, 600VA max. | Ivory |
| LSLV600PW | LSLV603PW | | | White |
| LSLV600P | LSLV603P | | | Brown |
| LSLV600PBK | LSLV603PBK | | | Black |
| LSLV600PLA | LSLV603PLA | | | Light Almond |
| | | | | |

*Available in VisionPak™ packaging, add "V" to Catalog Number. Example: LS600IV.

**Available in boxed packaging only.

For wiring diagrams, see Page U-22.

Features

- Ergonomic design and solid, quality feel combine for smooth, easy operation and precise control.
- Electromagnetic and radio-frequency interference protection built in.
- Sleek, sculpted contemporary design. No dirt-catching crevices.
- Tough, impact-resistant thermoplastic housing makes it a perfect choice for new home construction. Matching, unbreakable TradeMaster® wall plate available for all models.
- Preset ON/OFF switch automatically returns controlled lights to preset level without readjusting dimmer setting.
- Exclusive, screw-pressure-plate back wire terminals save time, space and money. Designed for 12 and 14 gauge wire, stranded or solid. No-wire-lead design eliminates wire nuts.
- Superior heat management.
- No de-rating on 600W units.
- Patented Snap-In Light Module (sold separately) transforms the dimmer into an illuminated dimmer. See Page 0-10 for information.


| MAX. LOAD RATING | FINS REMOVED | |
|------------------------|-----------------------|----------|
| | ONE SIDE | TWO SIDE |
| DE-RATING CHART | | |
| LS600, LS603 | No De-Rating Required | |
| LS1000P, LS1003P | 900W | 750W |
| LS1000 | 850W | 700W |

DIMMERS & FAN SPEED CONTROLS

Catalog Numbering System



All Dimmers and Fan Speed Controls use an easy-to-understand catalog numbering system:

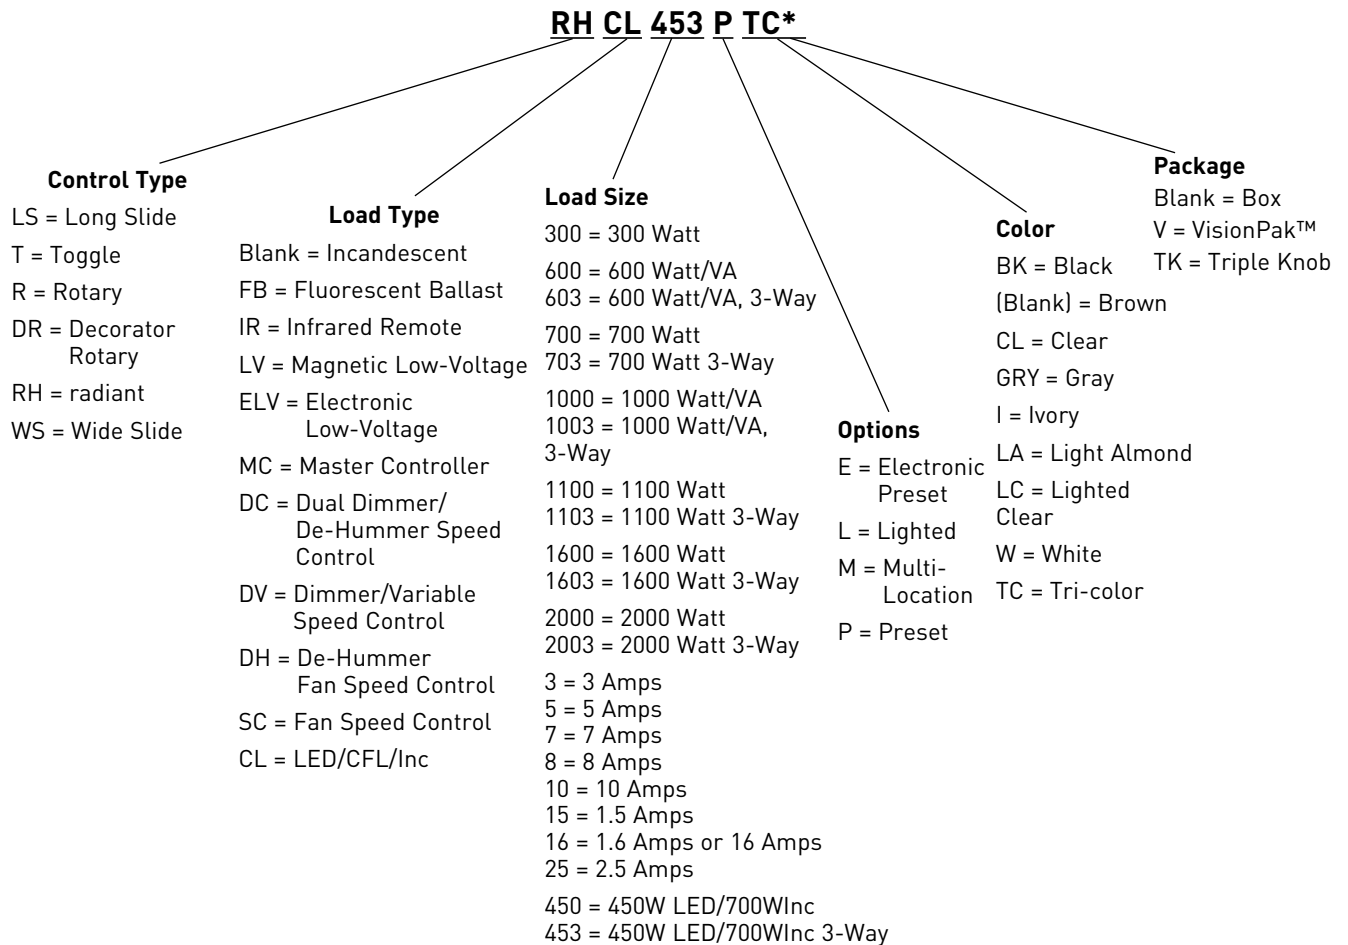

WS703PW = Wide Slide, Incandescent, 700# 3-Way, Preset in White

LS600LA = Decorator-style Long Slide Dimmer, Incandescent, 600W, Light Almond, in a Box

WS53PWV = Wide Slide, Fan Speed Control, 5 Amp, White, in a VisionPak


Many Dimmers & Fan Speed Controls are available boxed or VisionPak™ clam-shell packaging for high-impact merchandising.

Please see the Catalog Numbering System above or specific charts for ordering information.

All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.

RESIDENTIAL & LIGHT COMMERCIAL DIMMERS & FAN SPEED CONTROLS

LS Series Dimmers

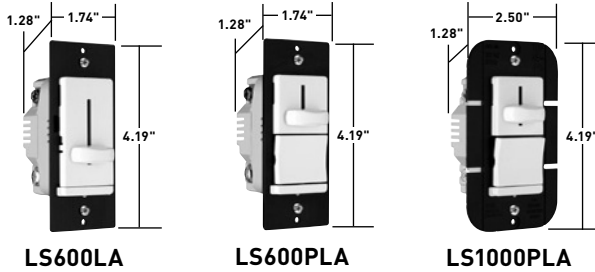

| CATALOG NUMBER | | DESCRIPTION | RATINGS | COLOR |
|---------------------------------------------------|------------|-------------|------------------|--------------|
| SINGLE POLE | THREE-WAY | | | |
| 600W INCANDESCENT SLIDE DIMMERS* | | | | |
| LS600I | | Non-Preset | 120V, 600W max. | Ivory |
| LS600W | | | | White |
| LS600 | | | | Brown |
| LS600BK | | | | Black |
| LS600LA | | | | Light Almond |
| LS600PI | LS603PI | Preset | 120V, 600W max. | Ivory |
| LS600PW | LS603PW | | | White |
| LS600P | LS603P | | | Brown |
| LS600PBK | LS603PBK | | | Black |
| LS600PLA | LS603PLA | | | Light Almond |
| | | | | |
| 1000W INCANDESCENT SLIDE DIMMERS* | | | | |
| LS1000I | | Non-Preset | 120V, 1000W max. | Ivory |
| LS1000W | | | | White |
| LS1000 | | | | Brown |
| LS1000BK | | | | Black |
| LS1000LA | | | | Light Almond |
| LS1000PI | LS1003PI | Preset | 120V, 1000W max. | Ivory |
| LS1000PW | LS1003PW | | | White |
| LS1000P | LS1003P | | | Brown |
| LS1000PBK | LS1003PBK | | | Black |
| LS1000PLA | LS1003PLA | | | Light Almond |
| | | | | |
| 600VA MAGNETIC LOW-VOLTAGE SLIDE DIMMERS** | | | | |
| LSLV600I | | Non-Preset | 120V, 600VA max. | Ivory |
| LSLV600W | | | | White |
| LSLV600 | | | | Brown |
| LSLV600BK | | | | Black |
| LSLV600LA | | | | Light Almond |
| LSLV600PI | LSLV603PI | Preset | 120V, 600VA max. | Ivory |
| LSLV600PW | LSLV603PW | | | White |
| LSLV600P | LSLV603P | | | Brown |
| LSLV600PBK | LSLV603PBK | | | Black |
| LSLV600PLA | LSLV603PLA | | | Light Almond |
| | | | | |

*Available in VisionPak™ packaging, add "V" to Catalog Number. Example: LS600IV.

**Available in boxed packaging only.

For wiring diagrams, see Page U-22.

Features

- Ergonomic design and solid, quality feel combine for smooth, easy operation and precise control.
- Electromagnetic and radio-frequency interference protection built in.
- Sleek, sculpted contemporary design. No dirt-catching crevices.
- Tough, impact-resistant thermoplastic housing makes it a perfect choice for new home construction. Matching, unbreakable TradeMaster® wall plate available for all models.
- Preset ON/OFF switch automatically returns controlled lights to preset level without readjusting dimmer setting.
- Exclusive, screw-pressure-plate back wire terminals save time, space and money. Designed for 12 and 14 gauge wire, stranded or solid. No-wire-lead design eliminates wire nuts.
- Superior heat management.
- No de-rating on 600W units.
- Patented Snap-In Light Module (sold separately) transforms the dimmer into an illuminated dimmer. See Page 0-10 for information.

| MAX. LOAD RATING | FINS REMOVED | |
|------------------------|-----------------------|----------|
| | ONE SIDE | TWO SIDE |
| DE-RATING CHART | | |
| LS600, LS603 | No De-Rating Required | |
| LS1000P, LS1003P | 900W | 750W |
| LS1000 | 850W | 700W |