



INCANDESCENT

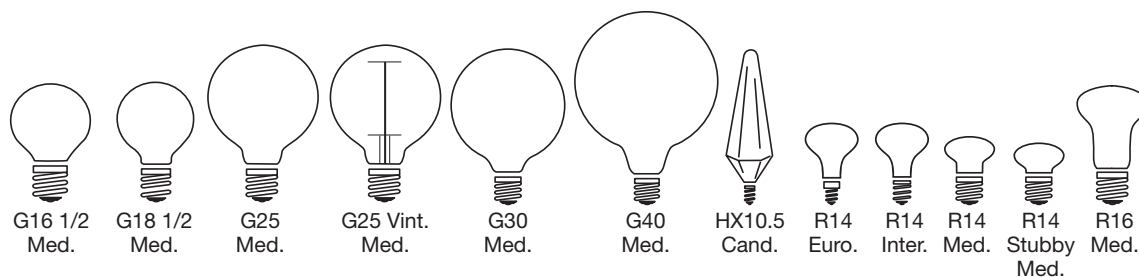

Watts	Bulb Type	Base	Satco Prod. #	Lamp Code	Volts	Finish	M.O.L. Inches	Filament	Initial Lumens	Avg. Rated Hours	Pkg. Type	Master/Inner Carton	Notes
40	G16 1/2	Med.	S3839	40G16 1/2	120	Clear	3 1/4	CC-2V	370	1500	Box	500/25	
			S4539	40G16 1/2	120	Clear	3 1/4	CC-2V	370	1500	CD/1	120/10	
			S3842	40G16 1/2/W	120	Gloss White	3 1/4	CC-2V	330	1500	Box	500/25	
			S4542	40G16 1/2/W	120	Gloss White	3 1/4	CC-2V	330	1500	CD/1	500/25	
	G18 1/2	Med.	S3888	40G18 1/2	120	Clear	3 1/2	C-9	340	1500	Box	250/25	
			S3828	40G18 1/2/W	120	Gloss White	3 1/2	C-9	300	1500	Box	250/25	
	G25	Med.	S3448	40G25	120	Clear	4 3/8	CC-9	360	3000	Box	72/6	
			S4048	40G25/3PK	120	Clear	4 3/8	CC-9	360	3000	3pk	40/3	
			A3648	40G25	130	Clear	4 3/8	CC-6	360	3000	Box	72/6	
			A3644	40G25/220V	220	Clear	4 3/8	CC-9	212	2500	Box	72/6	
			S3441	40G25/W	120	Gloss White	4 3/8	CC-6	320	3000	Box	72/6	
			S4041	40G25/W/3PK	120	Gloss White	4 3/8	CC-6	320	3000	3pk	40/3	
			A3641	40G25/W	130	Gloss White	4 3/8	CC-6	320	3000	Box	72/6	
			A3645	40G25/W/220V	220	Gloss White	4 3/8	CC-9	187	2500	Box	72/6	
			S2425	40G25/CL/155/120V/Vint.	120	Clear	4 3/4	Cage Style	160	3000	Box	48/6	
			S3861	40G25/SL	120	Silver Crown	4 3/8	C-9	280	1500	Box	72/6	
	G30	Med.	S3652	40G30	120	Clear	5 1/8	CC-9	340	2500	Box	72/6	
			S3671	40G30/W	120	Gloss White	5 1/8	CC-9	300	2500	Box	72/6	
	G40	Med.	S3011	40G40	120	Clear	6 3/4	C-9	300	4000	Box	24/6	
			S3001	40G40/W	120	Gloss White	6 3/4	C-9	280	4000	Box	24/6	
	HX10.5	Cand.	S3745	40HX10 1/2	120	Clear	4 1/2	C-7A	360	1500	CD/2	120/12	
	R14	Euro.	S3396	40R14/E14	130	Clear	2 5/8	CC-2V	280	1500	Box	500/25	
			S4706	40R14/E14	130	Frost	2 5/8	CC-2V	280	1500	CD/1	120/10	
		Inter.	S3215	40R14N	120	Clear	2 5/8	CC-2V	300	1500	Box	500/25	
			S4701	40R14N	120	Clear	2 5/8	CC-2V	280	1500	CD/1	120/10	
		Med.	S3605	40R14	120	Clear	2 5/8	CC-2V	280	1500	Box	500/25	
			S4705	40R14	120	Clear	2 5/8	CC-2V	280	1500	CD/1	120/10	
	R14 Stubby	Med.	S3602	40R14	120	Clear	2 1/4	CC-2V	280	1500	Box	500/25	
	R16	Med.	S3214	40R16	120	Frost	3 7/8	C-9	330	1500	Box	500/25	
			S4702	40R16	120	Frost	3 7/8	C-9	330	1500	CD/1	120/10	
R50	Euro.		S3619	40R50/E14	1250	Frost	3 7/8	C-9	300	1000	Box	500/25	

NOTE: When using a 130 Volt lamp on a 120 Volt line, life is extended approximately 2.5 times and lumens are reduced approximately 20%.

INCANDESCENT

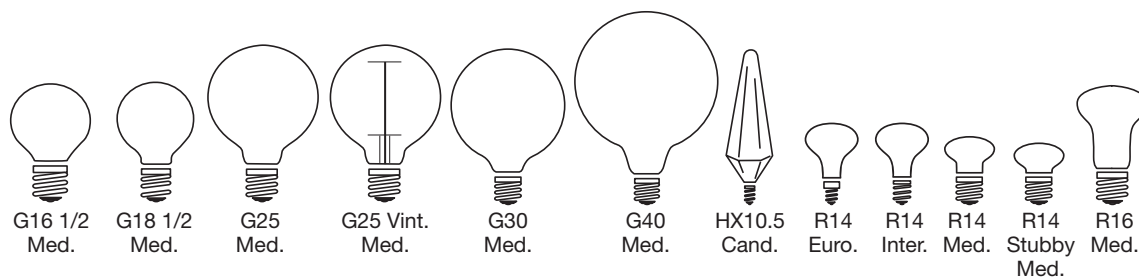

Watts	Bulb Type	Base	Satco Prod. #	Lamp Code	Volts	Finish	M.O.L. Inches	Filament	Initial Lumens	Avg. Rated Hours	Pkg. Type	Master/Inner Carton	Notes
40	G16 1/2	Med.	S3839	40G16 1/2	120	Clear	3 1/4	CC-2V	370	1500	Box	500/25	
			S4539	40G16 1/2	120	Clear	3 1/4	CC-2V	370	1500	CD/1	120/10	
			S3842	40G16 1/2/W	120	Gloss White	3 1/4	CC-2V	330	1500	Box	500/25	
			S4542	40G16 1/2/W	120	Gloss White	3 1/4	CC-2V	330	1500	CD/1	500/25	
	G18 1/2	Med.	S3888	40G18 1/2	120	Clear	3 1/2	C-9	340	1500	Box	250/25	
			S3828	40G18 1/2/W	120	Gloss White	3 1/2	C-9	300	1500	Box	250/25	
	G25	Med.	S3448	40G25	120	Clear	4 3/8	CC-9	360	3000	Box	72/6	
			S4048	40G25/3PK	120	Clear	4 3/8	CC-9	360	3000	3pk	40/3	
			A3648	40G25	130	Clear	4 3/8	CC-6	360	3000	Box	72/6	
			A3644	40G25/220V	220	Clear	4 3/8	CC-9	212	2500	Box	72/6	
			S3441	40G25/W	120	Gloss White	4 3/8	CC-6	320	3000	Box	72/6	
			S4041	40G25/W/3PK	120	Gloss White	4 3/8	CC-6	320	3000	3pk	40/3	
			A3641	40G25/W	130	Gloss White	4 3/8	CC-6	320	3000	Box	72/6	
			A3645	40G25/W/220V	220	Gloss White	4 3/8	CC-9	187	2500	Box	72/6	
			S2425	40G25/CL/155/120V/Vint.	120	Clear	4 3/4	Cage Style	160	3000	Box	48/6	
			S3861	40G25/SL	120	Silver Crown	4 3/8	C-9	280	1500	Box	72/6	
	G30	Med.	S3652	40G30	120	Clear	5 1/8	CC-9	340	2500	Box	72/6	
			S3671	40G30/W	120	Gloss White	5 1/8	CC-9	300	2500	Box	72/6	
	G40	Med.	S3011	40G40	120	Clear	6 3/4	C-9	300	4000	Box	24/6	
			S3001	40G40/W	120	Gloss White	6 3/4	C-9	280	4000	Box	24/6	
	HX10.5	Cand.	S3745	40HX10 1/2	120	Clear	4 1/2	C-7A	360	1500	CD/2	120/12	
	R14	Euro.	S3396	40R14/E14	130	Clear	2 5/8	CC-2V	280	1500	Box	500/25	
			S4706	40R14/E14	130	Frost	2 5/8	CC-2V	280	1500	CD/1	120/10	
		Inter.	S3215	40R14N	120	Clear	2 5/8	CC-2V	300	1500	Box	500/25	
			S4701	40R14N	120	Clear	2 5/8	CC-2V	280	1500	CD/1	120/10	
		Med.	S3605	40R14	120	Clear	2 5/8	CC-2V	280	1500	Box	500/25	
			S4705	40R14	120	Clear	2 5/8	CC-2V	280	1500	CD/1	120/10	
	R14 Stubby	Med.	S3602	40R14	120	Clear	2 1/4	CC-2V	280	1500	Box	500/25	
	R16	Med.	S3214	40R16	120	Frost	3 7/8	C-9	330	1500	Box	500/25	
			S4702	40R16	120	Frost	3 7/8	C-9	330	1500	CD/1	120/10	
R50	Euro.		S3619	40R50/E14	1250	Frost	3 7/8	C-9	300	1000	Box	500/25	

NOTE: When using a 130 Volt lamp on a 120 Volt line, life is extended approximately 2.5 times and lumens are reduced approximately 20%.