

Features

- Manufactured in type 316 stainless steel for superior strength and corrosion resistance
- Polished with standard “brite” finish
- Type 316 stainless steel set screw included
- No package quantity required




Certifications and Compliances

- Material: 316SS
- Hardware: 316SS
- Minimum tensile strength is 485 MPa or 70 Ksi

Applications

This heavy-duty beam clamp is designed for use to provide a means of attachment to a structural member. Used for hanging conduit or cables from a wall or ceiling. Attachment holes are located on the back and bottom.

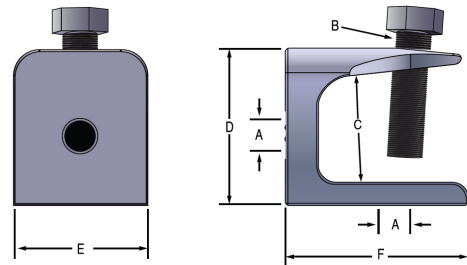

Domestic Ordering

Trade sizes marked with an * are also available domestically to meet the Made in America standards. To order the domestic version, add -DOM to the end of the part number.

Part Number	Trade Size (in)	A (in)	B (in)	C (in)	D (in)	E (in)	F (in)	Load Rating (lb)	Weight Per Each (lb)
S60200BC00	¼*	¼ - 20	⅝ - 18 x 1.5	0.78	1.44	1.00	1.31	150	0.22
S60300BC00	⅜*	⅜ - 16	½ - 13 x 1.5	0.99	1.75	1.75	1.75	750	0.63
S60500BC00	½*	½ - 13	⅝ - 11 x 1.5	0.99	2.00	2.00	2.00	1100	1.02

All dimensions are for informational purposes only
Tolerances +/- 2.5%

Features

- Manufactured in type 316 stainless steel for superior strength and corrosion resistance
- Polished with standard “brite” finish
- Type 316 stainless steel set screw included
- No package quantity required




Certifications and Compliances

- Material: 316SS
- Hardware: 316SS
- Minimum tensile strength is 485 MPa or 70 Ksi

Applications

This heavy-duty beam clamp is designed for use to provide a means of attachment to a structural member. Used for hanging conduit or cables from a wall or ceiling. Attachment holes are located on the back and bottom.

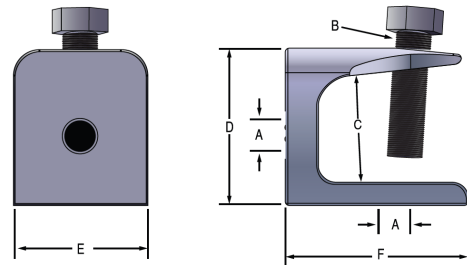

Domestic Ordering

Trade sizes marked with an * are also available domestically to meet the Made in America standards. To order the domestic version, add -DOM to the end of the part number.

Part Number	Trade Size (in)	A (in)	B (in)	C (in)	D (in)	E (in)	F (in)	Load Rating (lb)	Weight Per Each (lb)
S60200BC00	¼*	¼ - 20	⅝ ₁₆ - 18 x 1.5	0.78	1.44	1.00	1.31	150	0.22
S60300BC00	⅜*	⅜ - 16	½ - 13 x 1.5	0.99	1.75	1.75	1.75	750	0.63
S60500BC00	½*	½ - 13	⅝ - 11 x 1.5	0.99	2.00	2.00	2.00	1100	1.02

All dimensions are for informational purposes only
Tolerances +/- 2.5%