


Stainless Steel Right Angle Clamp

Features

- Manufactured in type 316 stainless steel for increased corrosion resistance
- Polished with standard “brite” finish
- Type 316 stainless steel hex nuts included
- No package quantity required

Applications

Designed to fit stainless rigid, IMC and EMT conduit. Can also be used for PVC-coated conduit. Calbrite Right Angle Clamps are used to mount conduit to the flange of a structural member without drilling holes. Cast in type 316 stainless steel, these clamps provide both excellent strength and corrosion resistance.

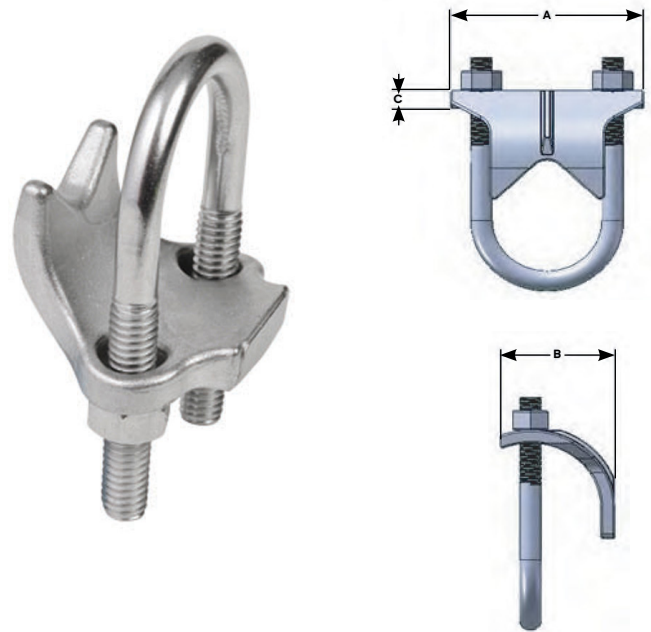

Part Number	Trade Size (in)	A (in)	B (in)	C (in)	Weight Per Each (lb)
S60500RA00	½	2.00	1.60	0.24	0.32
S60700RA00	¾	2.07	1.60	0.25	0.35
S61000RA00	1	2.59	1.60	0.25	0.45
S61200RA00	1 ¼	2.84	1.60	0.27	0.50
S61500RA00	1 ½	3.33	1.60	0.27	0.60
S62000RA00	2	3.85	1.69	0.31	0.95
S62500RA00	2 ½	4.58	1.80	0.33	1.25
S63000RA00	3	5.22	1.75	0.33	1.45
S64000RA00	4	6.18	1.75	0.33	1.70

All dimensions are for informational purposes only *Tolerances +/- 5%


Stainless Steel Right Angle Clamp

Features

- Manufactured in type 316 stainless steel for increased corrosion resistance
- Polished with standard “brite” finish
- Type 316 stainless steel hex nuts included
- No package quantity required

Applications

Designed to fit stainless rigid, IMC and EMT conduit. Can also be used for PVC-coated conduit. Calbrite Right Angle Clamps are used to mount conduit to the flange of a structural member without drilling holes. Cast in type 316 stainless steel, these clamps provide both excellent strength and corrosion resistance.

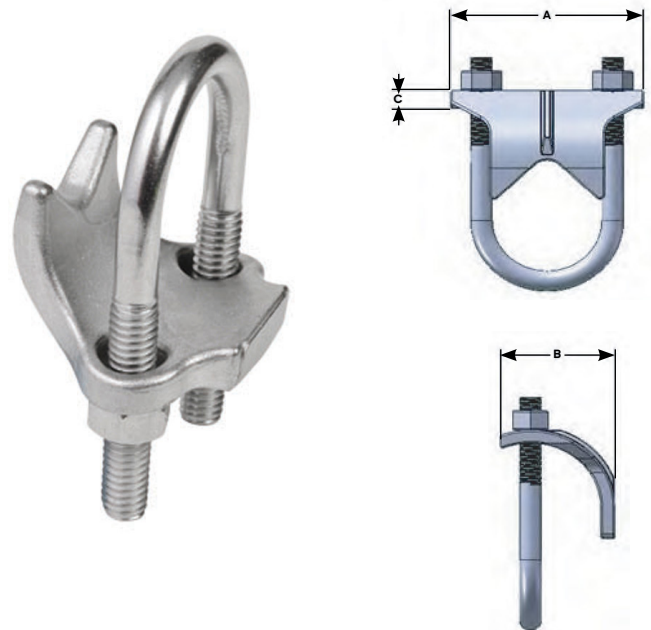

Part Number	Trade Size (in)	A (in)	B (in)	C (in)	Weight Per Each (lb)
S60500RA00	½	2.00	1.60	0.24	0.32
S60700RA00	¾	2.07	1.60	0.25	0.35
S61000RA00	1	2.59	1.60	0.25	0.45
S61200RA00	1 ¼	2.84	1.60	0.27	0.50
S61500RA00	1 ½	3.33	1.60	0.27	0.60
S62000RA00	2	3.85	1.69	0.31	0.95
S62500RA00	2 ½	4.58	1.80	0.33	1.25
S63000RA00	3	5.22	1.75	0.33	1.45
S64000RA00	4	6.18	1.75	0.33	1.70

All dimensions are for informational purposes only *Tolerances +/- 5%