





## Shovels


## **FEATURES:**

- 48" Handle Tensioned Fiberglass
- Minimum Breaking Strength of 261 Lbs Per DTH6950-1
- Safe From Electrical Shock
- Does Not Absorb Moisture
- Resists Industrial Chemicals
- Ergonomically Designed Grip
- Standard Or D Handle
- Made In The USA



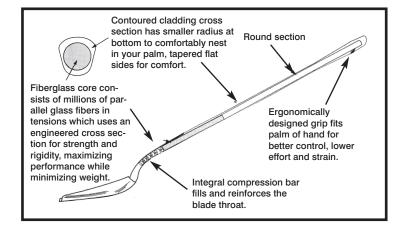

The shovel and grip ends are larger to provide leverage and control while the center tapers to help your hand slide when "slinging" the material away from the hole.



| BSE#  | DOTTIE#   | DESCRIPTION  | HANDLE LENGTH  | STD                        | MSTR            | WT/STD   | UNIT                             |
|---|---|--|--|----------------------------|-----------------|--|----------------------------------|
| XXXXXX<br>XXXXXX<br>XXXXXX<br>XXXXXX<br>XXXXXX<br>XXXXX | SHR<br>SHS<br>SHD<br>SHDSS<br>SHTR4<br>SHTR5<br>SPH | #2 Round Point #2 Square Point 14" Drain Spade 14" Sharpshooter 4" Trenching 5" Trenching Post Hole Digger | 48" Handle<br>48" Handle<br>48" Handle<br>27" 'D' Handle<br>48" Handle<br>48" Handle<br>48" Handle | 1<br>1<br>1<br>1<br>1<br>1 | 5 5 5 5 5 5 5 5 | 5.05#<br>5.44#<br>4.84#<br>3.77#<br>4.31#<br>5.20#<br>11.94# | Ea<br>Ea<br>Ea<br>Ea<br>Ea<br>Ea |

L.H. Dottie Company Commerce, CA 90040 Ihdottie.com