

FEATURES & SPECIFICATIONS

INTENDED USE

Provides general illumination in residential and light commercial applications. Ideal for use in workshops, utility rooms, and garages.

CONSTRUCTION

Constructed of a metal housing with a polycarbonate shield and decorative plastic end caps. The white polycarbonate lens provides even illumination on surfaces where tasks are performed. Both shoplights are designed for suspended installation via mounting chains. Available with 5' white cord and plug. The SHLP 48IN version also includes an on/off rocker switch.

ELECTRICAL

LEDs have a 35,000 hour L70 rated life. Provides a cool color temperature of 4000K with a CRI of 80. Starts reliably down to 0° F.

Model SHLP 36IN 40K 80CRI DNA produces 3000 lumens, Standard input=34 watts, 88 lumens per watt.

Model SHLP 48IN 40K 80CRI DNA produces 3200 lumens, Standard input= 36 watts, 88 lumens per watt.

Actual wattage may differ by +/- 5% when operating at 120V +/- 10%.

Standard with 120V driver (120V, 60Hz).

INSTALLATION

Includes 9 1/2" mounting chains and S-hooks.

LISTINGS

CSA listed to US and Canadian Safety Standards.

WARRANTY


1-year limited warranty. Complete warranty terms located at:

www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

NOTE: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

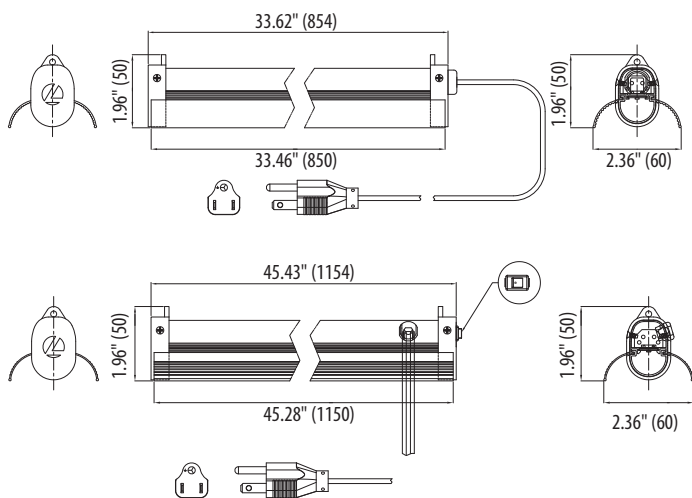

Catalog Number
Notes
Type

Indoor General Purpose

LED Shoplight

HIGH-PERFORMANCE LED



ORDERING INFORMATION

For shortest lead times, configure product using **bolded options**.

Example: SHLP 36IN 40K 80CRI DNA


Series	Length	CCT	CRI	Finish
SHLP	36IN 36 inches 48IN 48 inches	40K	80CRI	DNA Natural Aluminum

LED Shoplight


PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Consult factory. Actual performance may differ as a result of end-user environment and application.

SHLP 36IN, test no. ISF33182, tested in accordance to IESNA LM-79.

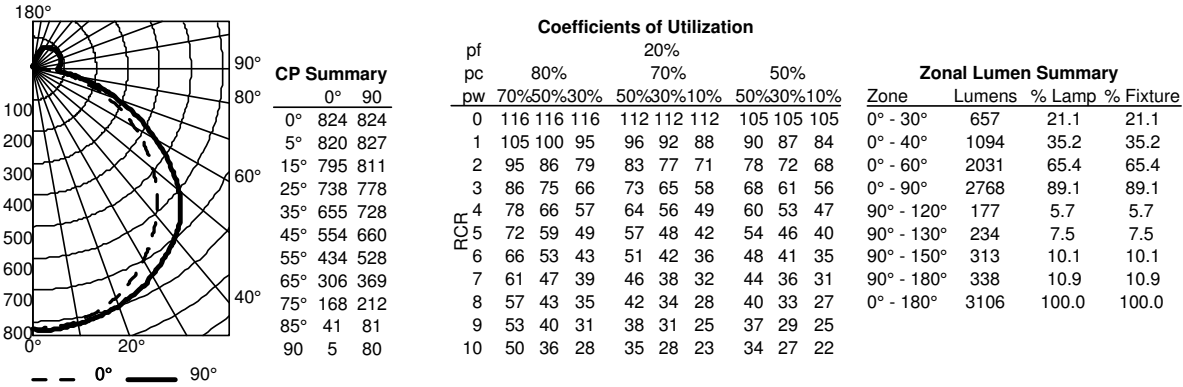

SHLP 48IN, test no. ISF33184, tested in accordance to IESNA LM-79.

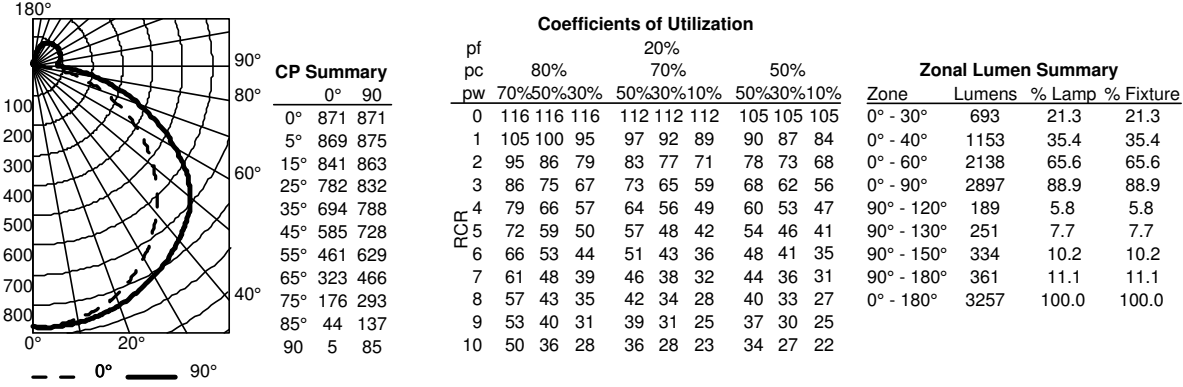

LIGHTING FACTS

Lighting facts

Light Output (Lumens) 2997
Watts 33.4
Lumens per Watt (Efficacy) 89.73

Color Accuracy 80

Light Color 4000 (Bright White)

Visit www.lightingfacts.com for the Label Reference Guide.

Lighting facts

Light Output (Lumens) 3256
Watts 35.27
Lumens per Watt (Efficacy) 92.32

Color Accuracy 80

Light Color 4000 (Bright White)

Visit www.lightingfacts.com for the Label Reference Guide.

FEATURES & SPECIFICATIONS

INTENDED USE

Provides general illumination in residential and light commercial applications. Ideal for use in workshops, utility rooms, and garages.

CONSTRUCTION

Constructed of a metal housing with a polycarbonate shield and decorative plastic end caps. The white polycarbonate lens provides even illumination on surfaces where tasks are performed. Both shoplights are designed for suspended installation via mounting chains. Available with 5' white cord and plug. The SHLP 48IN version also includes an on/off rocker switch.

ELECTRICAL

LEDs have a 35,000 hour L70 rated life. Provides a cool color temperature of 4000K with a CRI of 80. Starts reliably down to 0° F.

Model SHLP 36IN 40K 80CRI DNA produces 3000 lumens, Standard input=34 watts, 88 lumens per watt.

Model SHLP 48IN 40K 80CRI DNA produces 3200 lumens, Standard input= 36 watts, 88 lumens per watt.

Actual wattage may differ by +/- 5% when operating at 120V +/- 10%.

Standard with 120V driver (120V, 60Hz).

INSTALLATION

Includes 9 1/2" mounting chains and S-hooks.

LISTINGS

CSA listed to US and Canadian Safety Standards.

WARRANTY


1-year limited warranty. Complete warranty terms located at:

www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

NOTE: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

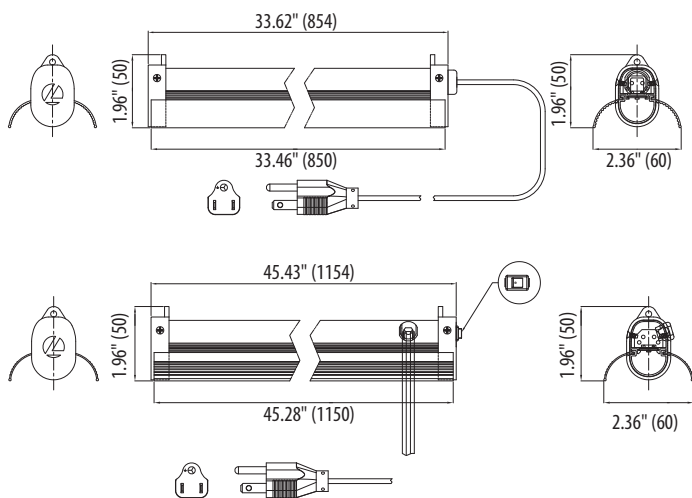

Catalog Number
Notes
Type

Indoor General Purpose

LED Shoplight

HIGH-PERFORMANCE LED



ORDERING INFORMATION

For shortest lead times, configure product using **bolded options**.

Example: SHLP 36IN 40K 80CRI DNA


Series	Length	CCT	CRI	Finish
SHLP	36IN 36 inches 48IN 48 inches	40K	80CRI	DNA Natural Aluminum

LED Shoplight


PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Consult factory. Actual performance may differ as a result of end-user environment and application.

SHLP 36IN, test no. ISF33182, tested in accordance to IESNA LM-79.

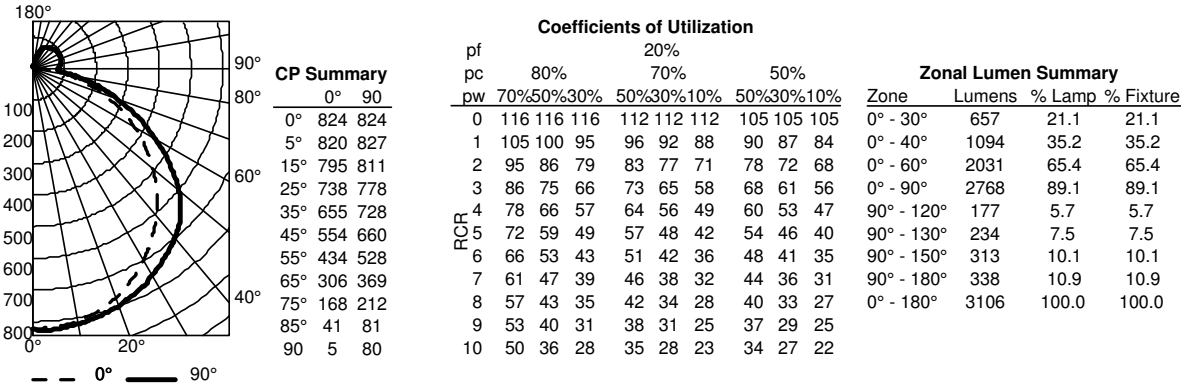

SHLP 48IN, test no. ISF33184, tested in accordance to IESNA LM-79.

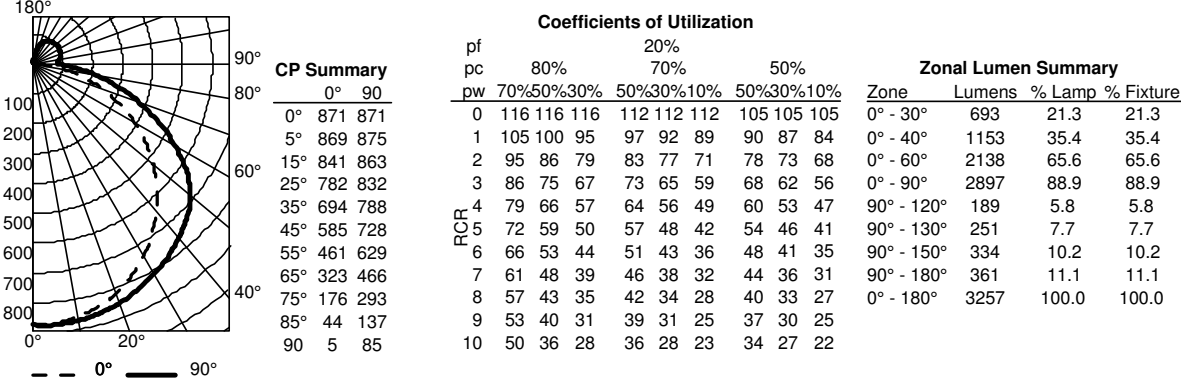

LIGHTING FACTS

