

# Liquidtight ST Series Plain Throat and STB Series Insulated Throat Connectors

For Liquidtight Flexible Metal Conduit

Suitable for use in Class I, Division 2

## Applications

- Provides a dependable connection for liquidtight flexible metal conduit.

## Features

- ST Series has plain throat.
- STB Series has insulated throat to protect against wire damage.
- Seals out oil, water, dust, dirt and fumes.
- Unique long ferrule with more pronounced threads provides over four times UL pull-out requirements.
- Ferrule provides maximum surface contact for better sealing and a continuous, permanent, positive metal-to-metal ground.
- Polypropylene sealing ring with locknut standard.
- Liquidtight/raintight/oiltight.
- Suitable for wet locations.
- Full, machined tapered threads (NPT).
- Compact design with small turning radius.
- Straight, 45° and 90° styles available in trade sizes 3/8" thru 4"

## Standard Material/Finish

- 3/8" thru 1" straight: steel body and compression nut
- 1-1/4" thru 4" straight: malleable iron body and compression nut
- 3/8" thru 4" 45° and 90°: malleable iron body
- 3/8" thru 1" 45° and 90° caps: steel
- 1-1/4" thru 4" 45° and 90° caps: malleable iron
- 3/8" thru 1" ferrule: steel
- 1-1/4" thru 4" ferrule: aluminum
- Steel: zinc electroplate
- Malleable iron: zinc electroplate, chromate and epoxy powder coat/zinc electroplate
- Sealing ring: polypropylene


## Certifications and Compliances

- UL Standard: 514B
- UL Listed: E14814
- CSA Standard C22.2 No. 18.3
- CSA Certified: 065178
- NEMA: FB-1

## STD Conduit Thread Size

| Flexible Conduit Size (Inches) | NPT Size |
|--------------------------------|----------|
| 3/8                            | 1/2      |
| 1/2                            | 1/2      |
| 3/4                            | 3/4      |
| 1                              | 1        |
| 1-1/4                          | 1-1/4    |
| 1-1/2                          | 1-1/2    |
| 2                              | 2        |
| 2-1/2                          | 2-1/2    |
| 3                              | 3        |
| 3-1/2                          | 3-1/2    |
| 4                              | 4        |
| 5                              | 5        |

## Dimensions

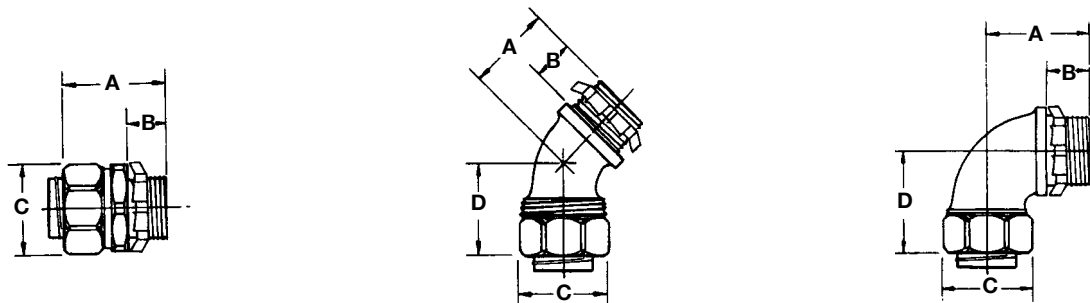

# Liquidtight ST Series Plain Throat Connectors

For Liquidtight Flexible Metal Conduit

Suitable for use in Class I, Division 2

|                                                                                     | Catalog<br>Number | Conduit Size<br>(Inches) | A           | Dimensions in Inches/Millimeters |            |             | D              | Weight Lbs./<br>Kgs. Per 100 |
|-------------------------------------------------------------------------------------|-------------------|--------------------------|-------------|----------------------------------|------------|-------------|----------------|------------------------------|
| Straight                                                                            |                   |                          |             |                                  |            |             |                |                              |
|    | ST-38             | 3/8 flex,<br>1/2 hub     | 1.44/36.6   | 0.63/16.0                        | 1.13/28.7  | —           | 16.00/7.26     |                              |
|                                                                                     | ST-50             | 1/2                      | 1.44/36.6   | 0.63/16.0                        | 1.25/31.8  | —           | 15.00/6.80     |                              |
|                                                                                     | ST-75             | 3/4                      | 1.50/38.1   | 0.63/16.0                        | 1.50/38.1  | —           | 22.00/9.98     |                              |
|                                                                                     | ST-100            | 1                        | 1.63/41.4   | 0.75/19.1                        | 1.81/45.9  | —           | 34.00/15.42    |                              |
|    | ST-125            | 1-1/4                    | 2.00/50.8   | 0.63/16.0                        | 2.31/58.7  | —           | 84.00/38.10    |                              |
|                                                                                     | ST-150            | 1-1/2                    | 2.25/57.2   | 0.63/16.0                        | 2.63/66.8  | —           | 120.00/54.43   |                              |
|                                                                                     | ST-200            | 2                        | 2.50/63.5   | 0.69/17.5                        | 3.19/81.0  | —           | 165.00/74.84   |                              |
|                                                                                     | ST-250            | 2-1/2                    | 3.38/85.9   | 1.06/26.9                        | 3.94/100.1 | —           | 350.00/158.76  |                              |
|                                                                                     | ST-300            | 3                        | 3.69/93.7   | 1.19/30.2                        | 4.38/111.3 | —           | 450.00/204.12  |                              |
|                                                                                     | ST-350            | 3-1/2                    | 3.69/93.7   | 1.19/30.2                        | 5.00/127.0 | —           | 525.00/238.13  |                              |
|                                                                                     | ST-400            | 4                        | 4.00/101.6  | 1.25/31.8                        | 5.50/139.7 | —           | 664.00/301.19  |                              |
| 45°                                                                                 |                   |                          |             |                                  |            |             |                |                              |
|  | ST-4538           | 3/8 flex,<br>1/2 hub     | 0.88/22.4   | 0.63/16.0                        | 1.13/28.7  | 1.13/28.7   | 19.00/8.62     |                              |
|                                                                                     | ST-4550           | 1/2                      | 0.88/22.4   | 0.63/16.0                        | 1.25/31.8  | 1.13/28.7   | 19.00/8.62     |                              |
|                                                                                     | ST-4575           | 3/4                      | 1.13/28.7   | 0.63/16.0                        | 1.50/38.1  | 1.25/31.8   | 32.00/14.51    |                              |
|                                                                                     | ST-45100          | 1                        | 1.38/35.1   | 0.75/19.1                        | 1.81/45.9  | 1.81/45.9   | 46.00/20.87    |                              |
|                                                                                     | ST-45125          | 1-1/4                    | 1.63/41.4   | 0.63/16.0                        | 2.31/58.7  | 1.81/45.9   | 103.00/46.72   |                              |
|                                                                                     | ST-45150          | 1-1/2                    | 1.81/45.9   | 0.63/16.0                        | 2.63/66.8  | 2.13/54.1   | 165.00/74.84   |                              |
|                                                                                     | ST-45200          | 2                        | 2.00/50.8   | 0.69/17.5                        | 3.19/81.0  | 2.38/60.5   | 245.00/111.13  |                              |
|                                                                                     | ST-45250          | 2-1/2                    | 3.56/90.4   | 1.06/26.9                        | 3.94/100.1 | 5.00/127.0  | 760.00/344.73  |                              |
|                                                                                     | ST-45300          | 3                        | 4.31/109.5  | 1.19/30.2                        | 4.38/111.3 | 5.81/147.6  | 962.00/436.36  |                              |
|                                                                                     | ST-45400          | 4                        | 4.63/117.6  | 1.25/31.8                        | 5.50/139.7 | 4.00/101.6  | 1512.00/685.83 |                              |
| 90°                                                                                 |                   |                          |             |                                  |            |             |                |                              |
|  | ST-9038           | 3/8 flex,<br>1/2 hub     | 1.25/31.8   | 0.63/16.0                        | 1.13/28.7  | 1.50/38.1   | 22.80/10.34    |                              |
|                                                                                     | ST-9050           | 1/2                      | 1.25/31.8   | 0.63/16.0                        | 1.25/31.8  | 1.50/38.1   | 23.00/10.43    |                              |
|                                                                                     | ST-9075           | 3/4                      | 1.44/36.6   | 0.63/16.0                        | 1.50/38.1  | 1.56/39.6   | 39.00/17.69    |                              |
|                                                                                     | ST-90100          | 1                        | 1.38/35.1   | 0.75/19.1                        | 1.81/45.9  | 1.88/47.8   | 62.00/28.12    |                              |
|                                                                                     | ST-90125          | 1-1/4                    | 1.81/45.9   | 0.63/16.0                        | 2.31/58.7  | 2.38/60.5   | 114.00/51.71   |                              |
|                                                                                     | ST-90150          | 1-1/2                    | 2.44/61.9   | 0.63/16.0                        | 2.63/66.8  | 3.19/81.0   | 195.00/88.45   |                              |
|                                                                                     | ST-90200          | 2                        | 2.63/66.8   | 0.69/17.5                        | 3.19/81.0  | 3.56/90.4   | 290.00/131.54  |                              |
|                                                                                     | ST-90250          | 2-1/2                    | 7.19/182.6  | 1.06/26.9                        | 3.94/100.1 | 8.44/214.4  | 843.00/382.38  |                              |
|                                                                                     | ST-90300          | 3                        | 8.63/219.2  | 1.19/30.2                        | 4.38/111.3 | 10.13/257.3 | 1100.00/498.95 |                              |
|                                                                                     | ST-90400          | 4                        | 11.25/285.8 | 1.25/31.8                        | 5.50/139.7 | 12.81/325.4 | 2100.00/952.54 |                              |

Commercial Products

COMMERCIAL PRODUCTS: LIQUIDTIGHT CONDUIT FITTINGS

# Liquidtight STB Series Insulated Throat Connectors

For Liquidtight Flexible Metal Conduit

Suitable for use in Class I, Division 2

|                                                                                     | Catalog<br>Number | Conduit Size<br>(Inches) | Dimensions in Inches/Millimeters |           |            |             | Weight Lbs./Kgs.<br>Per 100 |
|-------------------------------------------------------------------------------------|-------------------|--------------------------|----------------------------------|-----------|------------|-------------|-----------------------------|
|                                                                                     |                   |                          | A                                | B         | C          | D           |                             |
|    | STB-38            | 3/8 flex, 1/2 hub        | 1.44/36.6                        | 0.63/16.0 | 1.13/28.7  | —           | 15.00/6.80                  |
|                                                                                     | STB-50            | 1/2                      | 1.44/36.6                        | 0.63/16.0 | 1.25/31.8  | —           | 16.00/7.26                  |
|                                                                                     | STB-75            | 3/4                      | 1.50/38.1                        | 0.63/16.0 | 1.50/38.1  | —           | 23.00/10.43                 |
|                                                                                     | STB-100           | 1                        | 1.63/41.4                        | 0.75/19.1 | 1.81/45.9  | —           | 34.00/15.42                 |
|                                                                                     | STB-125           | 1-1/4                    | 2.00/50.8                        | 0.63/16.0 | 2.31/58.7  | —           | 84.00/38.10                 |
|                                                                                     | STB-150           | 1-1/2                    | 2.25/57.2                        | 0.63/16.0 | 2.63/66.8  | —           | 119.00/53.98                |
|                                                                                     | STB-200           | 2                        | 2.50/63.5                        | 0.69/17.5 | 3.19/81.0  | —           | 170.00/77.11                |
|                                                                                     | STB-250           | 2-1/2                    | 3.38/85.9                        | 1.06/26.9 | 3.94/100.1 | —           | 340.00/154.22               |
|                                                                                     | STB-300           | 3                        | 3.69/93.7                        | 1.19/30.2 | 4.38/111.3 | —           | 450.00/204.12               |
|                                                                                     | STB-350           | 3-1/2                    | 3.69/93.7                        | 1.19/30.2 | 5.00/127.0 | —           | 530.00/240.40               |
|                                                                                     | STB-400           | 4                        | 4.00/101.6                       | 1.25/31.8 | 5.50/139.7 | —           | 655.00/297.10               |
|  | STB-4538          | 3/8 flex, 1/2 hub        | 0.88/22.4                        | 0.63/16.0 | 1.13/28.7  | 1.13/28.7   | 18.00/8.16                  |
|                                                                                     | STB-4550          | 1/2                      | 0.88/22.4                        | 0.63/16.0 | 1.25/31.8  | 1.13/28.7   | 18.00/8.16                  |
|                                                                                     | STB-4575          | 3/4                      | 1.13/28.7                        | 0.63/16.0 | 1.50/38.1  | 1.25/31.8   | 30.00/13.61                 |
|                                                                                     | STB-45100         | 1                        | 1.38/35.1                        | 0.75/19.1 | 1.81/45.9  | 1.81/45.9   | 49.00/22.23                 |
|                                                                                     | STB-45125         | 1-1/4                    | 1.63/41.4                        | 0.63/16.0 | 2.31/58.7  | 1.81/45.9   | 102.00/46.27                |
|                                                                                     | STB-45150         | 1-1/2                    | 1.81/45.9                        | 0.63/16.0 | 2.63/66.8  | 2.13/54.1   | 160.00/72.57                |
|                                                                                     | STB-45200         | 2                        | 2.00/50.8                        | 0.69/17.5 | 3.19/81.0  | 2.38/60.5   | 230.00/104.33               |
|                                                                                     | STB-45250         | 2-1/2                    | 3.56/90.4                        | 1.06/26.9 | 3.94/100.1 | 5.00/127.0  | 760.00/344.73               |
|                                                                                     | STB-45300         | 3                        | 4.31/109.5                       | 1.19/30.2 | 4.38/111.3 | 5.81/147.6  | 1000.00/453.59              |
|                                                                                     | STB-45400         | 4                        | 4.63/117.6                       | 1.25/31.8 | 5.50/139.7 | 4.00/101.6  | 1800.00/816.47              |
|  | STB-9038          | 3/8 flex, 1/2 hub        | 1.25/31.8                        | 0.63/16.0 | 1.13/28.7  | 1.50/38.1   | 23.00/10.43                 |
|                                                                                     | STB-9050          | 1/2                      | 1.25/31.8                        | 0.63/16.0 | 1.25/31.8  | 1.50/38.1   | 24.00/10.89                 |
|                                                                                     | STB-9075          | 3/4                      | 1.44/36.6                        | 0.63/16.0 | 1.50/38.1  | 1.56/39.6   | 38.00/17.24                 |
|                                                                                     | STB-90100         | 1                        | 1.38/35.1                        | 0.75/19.1 | 1.81/45.9  | 1.88/47.8   | 58.00/26.31                 |
|                                                                                     | STB-90125         | 1-1/4                    | 1.81/45.9                        | 0.63/16.0 | 2.31/58.7  | 2.38/60.5   | 116.00/52.62                |
|                                                                                     | STB-90150         | 1-1/2                    | 2.44/61.9                        | 0.63/16.0 | 2.63/66.8  | 3.19/81.0   | 192.00/87.09                |
|                                                                                     | STB-90200         | 2                        | 2.63/66.8                        | 0.69/17.5 | 3.19/81.0  | 3.56/90.4   | 282.00/127.91               |
|                                                                                     | STB-90250         | 2-1/2                    | 7.19/182.6                       | 1.06/26.9 | 3.94/100.1 | 8.44/214.4  | 840.00/381.02               |
|                                                                                     | STB-90300         | 3                        | 8.63/219.2                       | 1.19/30.2 | 4.38/111.3 | 10.13/257.3 | 1100.00/498.95              |
|                                                                                     | STB-90400         | 4                        | 11.25/285.8                      | 1.25/31.8 | 5.50/139.7 | 12.81/325.4 | 2150.00/975.22              |

# Liquidtight ST Series Plain Throat and STB Series Insulated Throat Connectors

For Liquidtight Flexible Metal Conduit

Suitable for use in Class I, Division 2

## Applications

- Provides a dependable connection for liquidtight flexible metal conduit.

## Features

- ST Series has plain throat.
- STB Series has insulated throat to protect against wire damage.
- Seals out oil, water, dust, dirt and fumes.
- Unique long ferrule with more pronounced threads provides over four times UL pull-out requirements.
- Ferrule provides maximum surface contact for better sealing and a continuous, permanent, positive metal-to-metal ground.
- Polypropylene sealing ring with locknut standard.
- Liquidtight/raintight/oiltight.
- Suitable for wet locations.
- Full, machined tapered threads (NPT).
- Compact design with small turning radius.
- Straight, 45° and 90° styles available in trade sizes 3/8" thru 4"

## Standard Material/Finish

- 3/8" thru 1" straight: steel body and compression nut
- 1-1/4" thru 4" straight: malleable iron body and compression nut
- 3/8" thru 4" 45° and 90°: malleable iron body
- 3/8" thru 1" 45° and 90° caps: steel
- 1-1/4" thru 4" 45° and 90° caps: malleable iron
- 3/8" thru 1" ferrule: steel
- 1-1/4" thru 4" ferrule: aluminum
- Steel: zinc electroplate
- Malleable iron: zinc electroplate, chromate and epoxy powder coat/zinc electroplate
- Sealing ring: polypropylene


## Certifications and Compliances

- UL Standard: 514B
- UL Listed: E14814
- CSA Standard C22.2 No. 18.3
- CSA Certified: 065178
- NEMA: FB-1

## STD Conduit Thread Size

| Flexible Conduit Size (Inches) | NPT Size |
|--------------------------------|----------|
| 3/8                            | 1/2      |
| 1/2                            | 1/2      |
| 3/4                            | 3/4      |
| 1                              | 1        |
| 1-1/4                          | 1-1/4    |
| 1-1/2                          | 1-1/2    |
| 2                              | 2        |
| 2-1/2                          | 2-1/2    |
| 3                              | 3        |
| 3-1/2                          | 3-1/2    |
| 4                              | 4        |
| 5                              | 5        |

## Dimensions

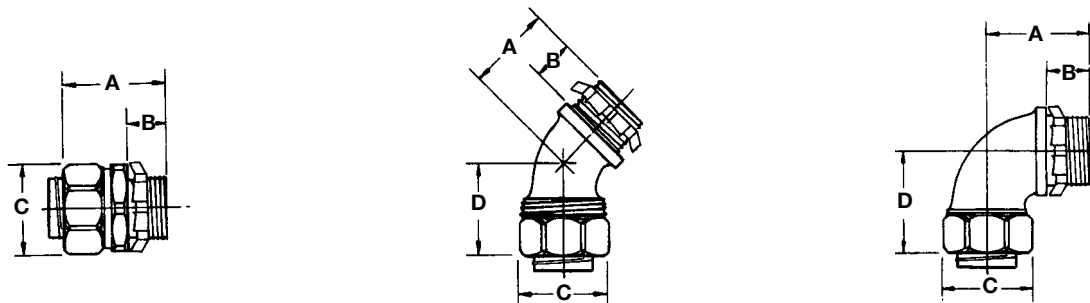

# Liquidtight ST Series Plain Throat Connectors

For Liquidtight Flexible Metal Conduit

Suitable for use in Class I, Division 2

|                                                                                     | Catalog<br>Number | Conduit Size<br>(Inches) | A           | Dimensions in Inches/Millimeters |            |             | D              | Weight Lbs./<br>Kgs. Per 100 |
|-------------------------------------------------------------------------------------|-------------------|--------------------------|-------------|----------------------------------|------------|-------------|----------------|------------------------------|
| Straight                                                                            |                   |                          |             |                                  |            |             |                |                              |
|    | ST-38             | 3/8 flex,<br>1/2 hub     | 1.44/36.6   | 0.63/16.0                        | 1.13/28.7  | —           | 16.00/7.26     |                              |
|                                                                                     | ST-50             | 1/2                      | 1.44/36.6   | 0.63/16.0                        | 1.25/31.8  | —           | 15.00/6.80     |                              |
|                                                                                     | ST-75             | 3/4                      | 1.50/38.1   | 0.63/16.0                        | 1.50/38.1  | —           | 22.00/9.98     |                              |
|                                                                                     | ST-100            | 1                        | 1.63/41.4   | 0.75/19.1                        | 1.81/45.9  | —           | 34.00/15.42    |                              |
|    | ST-125            | 1-1/4                    | 2.00/50.8   | 0.63/16.0                        | 2.31/58.7  | —           | 84.00/38.10    |                              |
|                                                                                     | ST-150            | 1-1/2                    | 2.25/57.2   | 0.63/16.0                        | 2.63/66.8  | —           | 120.00/54.43   |                              |
|                                                                                     | ST-200            | 2                        | 2.50/63.5   | 0.69/17.5                        | 3.19/81.0  | —           | 165.00/74.84   |                              |
|                                                                                     | ST-250            | 2-1/2                    | 3.38/85.9   | 1.06/26.9                        | 3.94/100.1 | —           | 350.00/158.76  |                              |
|                                                                                     | ST-300            | 3                        | 3.69/93.7   | 1.19/30.2                        | 4.38/111.3 | —           | 450.00/204.12  |                              |
|                                                                                     | ST-350            | 3-1/2                    | 3.69/93.7   | 1.19/30.2                        | 5.00/127.0 | —           | 525.00/238.13  |                              |
|                                                                                     | ST-400            | 4                        | 4.00/101.6  | 1.25/31.8                        | 5.50/139.7 | —           | 664.00/301.19  |                              |
| 45°                                                                                 |                   |                          |             |                                  |            |             |                |                              |
|  | ST-4538           | 3/8 flex,<br>1/2 hub     | 0.88/22.4   | 0.63/16.0                        | 1.13/28.7  | 1.13/28.7   | 19.00/8.62     |                              |
|                                                                                     | ST-4550           | 1/2                      | 0.88/22.4   | 0.63/16.0                        | 1.25/31.8  | 1.13/28.7   | 19.00/8.62     |                              |
|                                                                                     | ST-4575           | 3/4                      | 1.13/28.7   | 0.63/16.0                        | 1.50/38.1  | 1.25/31.8   | 32.00/14.51    |                              |
|                                                                                     | ST-45100          | 1                        | 1.38/35.1   | 0.75/19.1                        | 1.81/45.9  | 1.81/45.9   | 46.00/20.87    |                              |
|                                                                                     | ST-45125          | 1-1/4                    | 1.63/41.4   | 0.63/16.0                        | 2.31/58.7  | 1.81/45.9   | 103.00/46.72   |                              |
|                                                                                     | ST-45150          | 1-1/2                    | 1.81/45.9   | 0.63/16.0                        | 2.63/66.8  | 2.13/54.1   | 165.00/74.84   |                              |
|                                                                                     | ST-45200          | 2                        | 2.00/50.8   | 0.69/17.5                        | 3.19/81.0  | 2.38/60.5   | 245.00/111.13  |                              |
|                                                                                     | ST-45250          | 2-1/2                    | 3.56/90.4   | 1.06/26.9                        | 3.94/100.1 | 5.00/127.0  | 760.00/344.73  |                              |
|                                                                                     | ST-45300          | 3                        | 4.31/109.5  | 1.19/30.2                        | 4.38/111.3 | 5.81/147.6  | 962.00/436.36  |                              |
|                                                                                     | ST-45400          | 4                        | 4.63/117.6  | 1.25/31.8                        | 5.50/139.7 | 4.00/101.6  | 1512.00/685.83 |                              |
| 90°                                                                                 |                   |                          |             |                                  |            |             |                |                              |
|  | ST-9038           | 3/8 flex,<br>1/2 hub     | 1.25/31.8   | 0.63/16.0                        | 1.13/28.7  | 1.50/38.1   | 22.80/10.34    |                              |
|                                                                                     | ST-9050           | 1/2                      | 1.25/31.8   | 0.63/16.0                        | 1.25/31.8  | 1.50/38.1   | 23.00/10.43    |                              |
|                                                                                     | ST-9075           | 3/4                      | 1.44/36.6   | 0.63/16.0                        | 1.50/38.1  | 1.56/39.6   | 39.00/17.69    |                              |
|                                                                                     | ST-90100          | 1                        | 1.38/35.1   | 0.75/19.1                        | 1.81/45.9  | 1.88/47.8   | 62.00/28.12    |                              |
|                                                                                     | ST-90125          | 1-1/4                    | 1.81/45.9   | 0.63/16.0                        | 2.31/58.7  | 2.38/60.5   | 114.00/51.71   |                              |
|                                                                                     | ST-90150          | 1-1/2                    | 2.44/61.9   | 0.63/16.0                        | 2.63/66.8  | 3.19/81.0   | 195.00/88.45   |                              |
|                                                                                     | ST-90200          | 2                        | 2.63/66.8   | 0.69/17.5                        | 3.19/81.0  | 3.56/90.4   | 290.00/131.54  |                              |
|                                                                                     | ST-90250          | 2-1/2                    | 7.19/182.6  | 1.06/26.9                        | 3.94/100.1 | 8.44/214.4  | 843.00/382.38  |                              |
|                                                                                     | ST-90300          | 3                        | 8.63/219.2  | 1.19/30.2                        | 4.38/111.3 | 10.13/257.3 | 1100.00/498.95 |                              |
|                                                                                     | ST-90400          | 4                        | 11.25/285.8 | 1.25/31.8                        | 5.50/139.7 | 12.81/325.4 | 2100.00/952.54 |                              |

Commercial Products

COMMERCIAL PRODUCTS: LIQUIDTIGHT CONDUIT FITTINGS

# Liquidtight STB Series Insulated Throat Connectors

For Liquidtight Flexible Metal Conduit

Suitable for use in Class I, Division 2

|                                                                                     | Catalog<br>Number | Conduit Size<br>(Inches) | Dimensions in Inches/Millimeters |           |            |             | Weight Lbs./Kgs.<br>Per 100 |
|-------------------------------------------------------------------------------------|-------------------|--------------------------|----------------------------------|-----------|------------|-------------|-----------------------------|
|                                                                                     |                   |                          | A                                | B         | C          | D           |                             |
|    | STB-38            | 3/8 flex, 1/2 hub        | 1.44/36.6                        | 0.63/16.0 | 1.13/28.7  | —           | 15.00/6.80                  |
|                                                                                     | STB-50            | 1/2                      | 1.44/36.6                        | 0.63/16.0 | 1.25/31.8  | —           | 16.00/7.26                  |
|                                                                                     | STB-75            | 3/4                      | 1.50/38.1                        | 0.63/16.0 | 1.50/38.1  | —           | 23.00/10.43                 |
|                                                                                     | STB-100           | 1                        | 1.63/41.4                        | 0.75/19.1 | 1.81/45.9  | —           | 34.00/15.42                 |
|                                                                                     | STB-125           | 1-1/4                    | 2.00/50.8                        | 0.63/16.0 | 2.31/58.7  | —           | 84.00/38.10                 |
|                                                                                     | STB-150           | 1-1/2                    | 2.25/57.2                        | 0.63/16.0 | 2.63/66.8  | —           | 119.00/53.98                |
|                                                                                     | STB-200           | 2                        | 2.50/63.5                        | 0.69/17.5 | 3.19/81.0  | —           | 170.00/77.11                |
|                                                                                     | STB-250           | 2-1/2                    | 3.38/85.9                        | 1.06/26.9 | 3.94/100.1 | —           | 340.00/154.22               |
|                                                                                     | STB-300           | 3                        | 3.69/93.7                        | 1.19/30.2 | 4.38/111.3 | —           | 450.00/204.12               |
|                                                                                     | STB-350           | 3-1/2                    | 3.69/93.7                        | 1.19/30.2 | 5.00/127.0 | —           | 530.00/240.40               |
|                                                                                     | STB-400           | 4                        | 4.00/101.6                       | 1.25/31.8 | 5.50/139.7 | —           | 655.00/297.10               |
|  | STB-4538          | 3/8 flex, 1/2 hub        | 0.88/22.4                        | 0.63/16.0 | 1.13/28.7  | 1.13/28.7   | 18.00/8.16                  |
|                                                                                     | STB-4550          | 1/2                      | 0.88/22.4                        | 0.63/16.0 | 1.25/31.8  | 1.13/28.7   | 18.00/8.16                  |
|                                                                                     | STB-4575          | 3/4                      | 1.13/28.7                        | 0.63/16.0 | 1.50/38.1  | 1.25/31.8   | 30.00/13.61                 |
|                                                                                     | STB-45100         | 1                        | 1.38/35.1                        | 0.75/19.1 | 1.81/45.9  | 1.81/45.9   | 49.00/22.23                 |
|                                                                                     | STB-45125         | 1-1/4                    | 1.63/41.4                        | 0.63/16.0 | 2.31/58.7  | 1.81/45.9   | 102.00/46.27                |
|                                                                                     | STB-45150         | 1-1/2                    | 1.81/45.9                        | 0.63/16.0 | 2.63/66.8  | 2.13/54.1   | 160.00/72.57                |
|                                                                                     | STB-45200         | 2                        | 2.00/50.8                        | 0.69/17.5 | 3.19/81.0  | 2.38/60.5   | 230.00/104.33               |
|                                                                                     | STB-45250         | 2-1/2                    | 3.56/90.4                        | 1.06/26.9 | 3.94/100.1 | 5.00/127.0  | 760.00/344.73               |
|                                                                                     | STB-45300         | 3                        | 4.31/109.5                       | 1.19/30.2 | 4.38/111.3 | 5.81/147.6  | 1000.00/453.59              |
|                                                                                     | STB-45400         | 4                        | 4.63/117.6                       | 1.25/31.8 | 5.50/139.7 | 4.00/101.6  | 1800.00/816.47              |
|  | STB-9038          | 3/8 flex, 1/2 hub        | 1.25/31.8                        | 0.63/16.0 | 1.13/28.7  | 1.50/38.1   | 23.00/10.43                 |
|                                                                                     | STB-9050          | 1/2                      | 1.25/31.8                        | 0.63/16.0 | 1.25/31.8  | 1.50/38.1   | 24.00/10.89                 |
|                                                                                     | STB-9075          | 3/4                      | 1.44/36.6                        | 0.63/16.0 | 1.50/38.1  | 1.56/39.6   | 38.00/17.24                 |
|                                                                                     | STB-90100         | 1                        | 1.38/35.1                        | 0.75/19.1 | 1.81/45.9  | 1.88/47.8   | 58.00/26.31                 |
|                                                                                     | STB-90125         | 1-1/4                    | 1.81/45.9                        | 0.63/16.0 | 2.31/58.7  | 2.38/60.5   | 116.00/52.62                |
|                                                                                     | STB-90150         | 1-1/2                    | 2.44/61.9                        | 0.63/16.0 | 2.63/66.8  | 3.19/81.0   | 192.00/87.09                |
|                                                                                     | STB-90200         | 2                        | 2.63/66.8                        | 0.69/17.5 | 3.19/81.0  | 3.56/90.4   | 282.00/127.91               |
|                                                                                     | STB-90250         | 2-1/2                    | 7.19/182.6                       | 1.06/26.9 | 3.94/100.1 | 8.44/214.4  | 840.00/381.02               |
|                                                                                     | STB-90300         | 3                        | 8.63/219.2                       | 1.19/30.2 | 4.38/111.3 | 10.13/257.3 | 1100.00/498.95              |
|                                                                                     | STB-90400         | 4                        | 11.25/285.8                      | 1.25/31.8 | 5.50/139.7 | 12.81/325.4 | 2150.00/975.22              |