

P4D

High Performance Parabolic

PARABOLICS



FEATURES

- Nominal 3" deep louver
- Black reveal with full air handling capabilities
- Matte anodized low iridescent, semi-specular (MA) louver finish virtually eliminates visibility of fingerprints and construction dust
- Shallow housing
- Lightweight
- Recessed, surface, or cable mount
- UL listed 1598, cUL or CSA. Damp Location standard

ORDERING INFORMATION

P4D						
MODEL	NO. OF LAMPS	CEILING TYPE	CELLS WIDE BY CELLS LONG	BALLAST	VOLTAGE	
P4D High Performance Parabolic	2 Two 3 Three 4 Four (N/A in 2'x2') See Product Availability table below.	G Grid SM Surface Mount (static only) CM Cable Mount (static only) ⁴ For hard ceilings, use flange kit. See options in Technical section.	See Product Availability table below.	NOTE: See Technical Section for other ballast options. E Electronic T8, Instant Start 3E 3-Lamp Electronic T8, Instant Start 4E 4-Lamp Electronic T8, Instant Start EP Electronic T5 or T8, Programmed Start 3EP 3-Lamp Electronic T5H0 or T8, Programmed Start 4EP 4-Lamp Electronic T5H0 (N/A 347V) or T8, Programmed Start 24E 2 or 4-Lamp Electronic T8, Instant Start (For 3-Lamp Master/Satellite only) ELW 2-Lamp Electronic T8, 0.77 Ballast Factor, Low Wattage, Instant Start 3ELW 3-Lamp Electronic T8, 0.77 Ballast Factor, Low Wattage, Instant Start 4ELW 4-Lamp Electronic T8, 0.77 Ballast Factor, Low Wattage, Instant Start ETT Electronic Twin Tube, Instant Start (Specify voltage)	U 120V-277V 347 347V	
SIZE	LAMP TYPE	LOUVER FINISH	AIR HANDLING	OPTIONS		
22 2' x 2' ¹³	14 2', T5: 14 Watt	LS Low Iridescent Specular	S Static ¹	F0735	35K 75CRI T8 Lamps Installed	
24 2' x 4'	17 2', T8: 17 Watt	MA Matte Anodized Low Iridescent Semi-Specular Aluminum (Std.)	A Air Handling ¹	F0741	41K 75CRI T8 Lamps Installed	
	24 2', T5H0: 24 Watt		AV Air Handling with Supply Vanes ¹	F0835	35K 82CRI T8 Lamps Installed	
	28 4', T5: 28 Watt		C Combination Supply/Extract ²	F0841	41K 82CRI T8 Lamps Installed	
	31U1 U-Bent, 1 1/2" Leg Spacing T8: 31 Watt		CV Combination Supply Vanes/Extract ²	F5835	35K 85CRI T5 Lamps Installed	
	32 4', T8: 32, 30, 28 or 25 Watt		CD Combination Supply Extract Dampers ²	2BC	Two Ballast Covers	
	32U6 U-Bent, 6" Leg Spacing T8: 32 Watt		CVD Combination Supply Vanes Extract Dampers ²	C388	3-Wire Flex	
	40TT Twin Tube Compact, 2G11 Base: 40 Watt		H Heat Extract ²	C488	4-Wire Flex	
	54 4', T5H0: 54 or 51 Watt		HD Heat Extract with Dampers ²	EL	Emergency Battery Pack	
				GLR	Fast Blow Fuse	
				GMF	Slow Blow Fuse	
				MS9	Master/Satellite w/9' Harness	
				MS11	Master/Satellite w/ 11' Harness	
				PAF	Paint After Fabrication	
				TB4	(4) Bulk T-Bar Clips	
				EOR	End of Row (SM/CM only. Provides end wiring access for continuous row mounting) ⁵	
				INT	Intermediate (SM/CM only. Provides ends with wiring access for continuous row mounting) ⁵	
				NYC	NYC Compliant	
				NYCU	NYC Compliant, Union Label	


¹ All fixtures supplied with integral T-Bar clips.

² 2' x 2' fixtures supplied with integral T-Bar clips, 2' x 4' fixtures supplied with two non-integral T-Bar clips.

³ Various options may increase fixture height on 2' x 2'.

⁴ Order hanger accessories separately.

⁵ Contact factory for continuous row, 3-lamp fixtures.

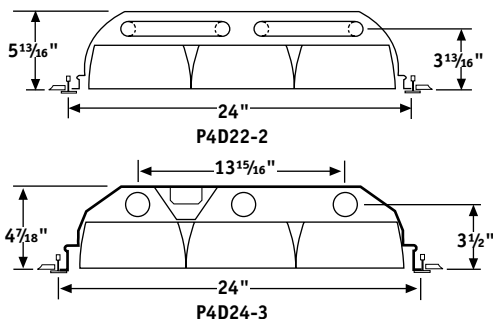

PRODUCT AVAILABILITY

SIZE	NO. OF LAMPS	LAMP TYPE	LOUVER CONFIGURATIONS
2' x 2'	2	14, 17, 24, 31U1, 32U6, 40TT	2 x 3 (6), 2 x 4 (8), 3 x 3 (9) , 4 x 4 (16)
	3	14, 17, 24, 31U1, 40TT	3 x 3 (9) , 4 x 4 (16)
	4	17	3 x 3 (9) , 4 x 4 (16)
2' x 4'	2	28, 32, 54	2 x 6 (12) , 2 x 8 (16), 4 x 6 (24), 4 x 8 (32)
	3	28, 32, 54	3 x 6 (18) , 3 x 8 (24)
	4	28, 32, 54	2 x 6 (12), 2 x 8 (16), 4 x 6 (24), 4 x 8 (32)

Standard louver configurations shown in bold. Ballast quantities or emergency pack options may be restricted in some models.

P4D

High Performance Parabolic

PARABOLICS



FEATURES

- Nominal 3" deep louver
- Black reveal with full air handling capabilities
- Matte anodized low iridescent, semi-specular (MA) louver finish virtually eliminates visibility of fingerprints and construction dust
- Shallow housing
- Lightweight
- Recessed, surface, or cable mount
- UL listed 1598, cUL or CSA. Damp Location standard

ORDERING INFORMATION

P4D						
MODEL	NO. OF LAMPS	CEILING TYPE	CELLS WIDE BY CELLS LONG	BALLAST	VOLTAGE	
P4D High Performance Parabolic	2 Two 3 Three 4 Four (N/A in 2'x2') See Product Availability table below.	G Grid SM Surface Mount (static only) CM Cable Mount (static only) ⁴ For hard ceilings, use flange kit. See options in Technical section.	See Product Availability table below.	NOTE: See Technical Section for other ballast options. E Electronic T8, Instant Start 3E 3-Lamp Electronic T8, Instant Start 4E 4-Lamp Electronic T8, Instant Start EP Electronic T5 or T8, Programmed Start 3EP 3-Lamp Electronic T5H0 or T8, Programmed Start 4EP 4-Lamp Electronic T5H0 (N/A 347V) or T8, Programmed Start 24E 2 or 4-Lamp Electronic T8, Instant Start (For 3-Lamp Master/Satellite only) ELW 2-Lamp Electronic T8, 0.77 Ballast Factor, Low Wattage, Instant Start 3ELW 3-Lamp Electronic T8, 0.77 Ballast Factor, Low Wattage, Instant Start 4ELW 4-Lamp Electronic T8, 0.77 Ballast Factor, Low Wattage, Instant Start ETT Electronic Twin Tube, Instant Start (Specify voltage)	U 120V-277V 347 347V	
SIZE	LAMP TYPE	LOUVER FINISH	AIR HANDLING	OPTIONS		
22 2' x 2' ¹³	14 2', T5: 14 Watt	LS Low Iridescent Specular	S Static ¹	F0735	35K 75CRI T8 Lamps Installed	
24 2' x 4'	17 2', T8: 17 Watt	MA Matte Anodized Low Iridescent Semi-Specular Aluminum (Std.)	A Air Handling ¹	F0741	41K 75CRI T8 Lamps Installed	
	24 2', T5H0: 24 Watt		AV Air Handling with Supply Vanes ¹	F0835	35K 82CRI T8 Lamps Installed	
	28 4', T5: 28 Watt		C Combination Supply/Extract ²	F0841	41K 82CRI T8 Lamps Installed	
	31U1 U-Bent, 1 1/2" Leg Spacing T8: 31 Watt		CV Combination Supply Vanes/Extract ²	F5835	35K 85CRI T5 Lamps Installed	
	32 4', T8: 32, 30, 28 or 25 Watt		CD Combination Supply Extract Dampers ²	2BC	Two Ballast Covers	
	32U6 U-Bent, 6" Leg Spacing T8: 32 Watt		CVD Combination Supply Vanes Extract Dampers ²	C388	3-Wire Flex	
	40TT Twin Tube Compact, 2G11 Base: 40 Watt		H Heat Extract ²	C488	4-Wire Flex	
	54 4', T5H0: 54 or 51 Watt		HD Heat Extract with Dampers ²	EL	Emergency Battery Pack	
				GLR	Fast Blow Fuse	
				GMF	Slow Blow Fuse	
				MS9	Master/Satellite w/9' Harness	
				MS11	Master/Satellite w/ 11' Harness	
				PAF	Paint After Fabrication	
				TB4	(4) Bulk T-Bar Clips	
				EOR	End of Row (SM/CM only. Provides end wiring access for continuous row mounting) ⁵	
				INT	Intermediate (SM/CM only. Provides ends with wiring access for continuous row mounting) ⁵	
				NYC	NYC Compliant	
				NYCU	NYC Compliant, Union Label	


¹ All fixtures supplied with integral T-Bar clips.

² 2' x 2' fixtures supplied with integral T-Bar clips, 2' x 4' fixtures supplied with two non-integral T-Bar clips.

³ Various options may increase fixture height on 2' x 2'.

⁴ Order hanger accessories separately.

⁵ Contact factory for continuous row, 3-lamp fixtures.

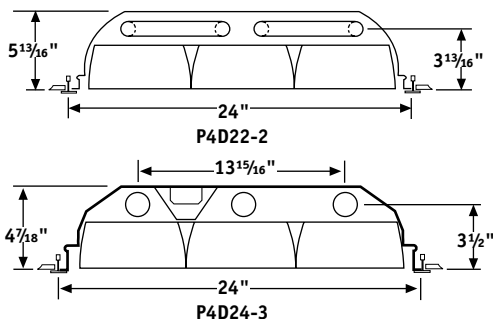

PRODUCT AVAILABILITY

SIZE	NO. OF LAMPS	LAMP TYPE	LOUVER CONFIGURATIONS
2' x 2'	2	14, 17, 24, 31U1, 32U6, 40TT	2 x 3 (6), 2 x 4 (8), 3 x 3 (9) , 4 x 4 (16)
	3	14, 17, 24, 31U1, 40TT	3 x 3 (9) , 4 x 4 (16)
	4	17	3 x 3 (9) , 4 x 4 (16)
2' x 4'	2	28, 32, 54	2 x 6 (12) , 2 x 8 (16), 4 x 6 (24), 4 x 8 (32)
	3	28, 32, 54	3 x 6 (18) , 3 x 8 (24)
	4	28, 32, 54	2 x 6 (12), 2 x 8 (16), 4 x 6 (24), 4 x 8 (32)

Standard louver configurations shown in bold. Ballast quantities or emergency pack options may be restricted in some models.