

Single & duplex tamper resistant self-test GFCI receptacles

Project Name:	Prepared By:
Project Number:	Date:
Catalog Number:	Type:

Description

2-pole, 3-wire grounding
15A, 125V/AC
20A, 125V/AC



5-15R



5-20R



TR270



TR6352



TR1107



TRSGF15

Design features

- Provides compliance with 2014 NEC Article 406.12
- Durable impact-resistant thermoplastic face and back body is virtually unbreakable
- "TR" designation provides visual identification that device has tamper resistant shutters preventing the insertion of foreign objects
- Terminal screws are backed out and ready to wire
- Extra-long and extra-wide mounting straps
- Patented built-in wire stripper for #14 and #12 wire (#12 and #10 for TR817, TR877, 9508TR, 9507TR, TR6350, TR6350) to speed installation
- Side-wire terminals accept up to #10 solid or stranded wire
- Push-in terminals accept #14 solid wire (TR270, TR1107 & 9500TR duplex devices only)

Table 1. Residential grade, single & duplex

Catalog no.	Description	Rating		NEMA	Color suffix
		A	V/AC		
<input type="checkbox"/> TR270__	Duplex receptacle	15	125	5-15R	A, B, BK, LA, V, W
<input type="checkbox"/> TR270-9__	Duplex receptacle, auto grounding	15	125	5-15R	A, B, LA, V, W
<input type="checkbox"/> TR1107__	Decorator duplex receptacle	15	125	5-15R	A, B, GY, LA, V, W
<input type="checkbox"/> TR1107-9__	Decorator duplex receptacle, auto grounding	15	125	5-15R	A, BK, LA, V, W
<input type="checkbox"/> 9505TR__	Aspire duplex receptacle	15	125	5-15R	DS, SG, WS
<input type="checkbox"/> 9507TR__	Aspire single receptacle	15	125	5-15R	DS, SG, WS
<input type="checkbox"/> 9508TR__	Aspire single receptacle	20	125	5-20R	DS, SG, WS
<input type="checkbox"/> 9510TR__	Aspire duplex receptacle	20	125	5-20R	DS, SG, WS

Table 2. Commercial grade, single & duplex

Catalog no.	Description	Rating		NEMA	Color suffix
		A	V/AC		
<input type="checkbox"/> TR817__	Single receptacle	15	125	5-15R	A, B, BK, GY, LA, V, W
<input type="checkbox"/> TRBR15__	Duplex receptacle	15	125	5-15R	A, B, BK, GY, LA, V, W
<input type="checkbox"/> TR6250__	Decorator single receptacle	15	125	5-15R	A, B, BK, GY, LA, V, W
<input type="checkbox"/> TR6252__	Decorator duplex receptacle	15	125	5-15R	A, B, BK, GY, LA, V, W
<input type="checkbox"/> TR1877__	Single receptacle	20	125	5-20R	A, B, BK, LA, V, W
<input type="checkbox"/> TRBR20__	Duplex receptacle	20	125	5-20R	A, B, BK, GY, LA, RD, V, W
<input type="checkbox"/> TR6350__	Decorator single receptacle	20	125	5-20R	A, B, BK, GY, LA, V, W
<input type="checkbox"/> TR6352__	Decorator duplex receptacle	20	125	5-20R	A, B, BK, GY, LA, V, W

EATON

Powering Business Worldwide

Project Name:	Prepared By:
Project Number:	Date:
Catalog Number:	Type:

Table 3. Specification grade duplex

Catalog no.	Description	Rating			Color suffix
		A	V/AC	NEMA	
<input type="checkbox"/> TRSGF15__	Duplex GFCI	15	125	5-15R	A, B, BK, GY, LA, V, W
<input type="checkbox"/> 9566TRS__	ASPIRE duplex GFCI	15	125	5-15R	DS, SG, WS
<input type="checkbox"/> TR8200__	Hospital grade duplex receptacle	15	125	5-15R	B, GY, RD, V, W
<input type="checkbox"/> TRSGFH15__	Tamper resistant hospital grade GFCI	15	125	5-15R	B, GY, V, LA, RD, W
<input type="checkbox"/> TRSGF20__	Duplex GFCI	20	125	5-20R	A, B, BK, GY, LA, V, W
<input type="checkbox"/> 9569TRS__	ASPIRE duplex GFCI	20	125	5-20R	DS, SG, WS
<input type="checkbox"/> TR8300__	Hospital grade duplex receptacle	20	125	5-20R	B, GY, RD, V, W
<input type="checkbox"/> TRSGFH20__	Tamper resistant hospital grade GFCI	20	125	5-20R	B, GY, V, LA, RD, W

Applications

Tamper resistant receptacles contain a UL listed safety shutter system that prevents the insertion of foreign objects into receptacles. The safety shutters will open only upon insertion of a 2-prong or 3-prong plug. Installing these receptacles ensures compliance with 2014 NEC Article 406.12. Areas of application include: new residential construction; remodel/retrofit residential construction; apartment buildings; condominiums and townhouses; hotels, motels, inns and suites with kitchenettes; retirement communities, nursing homes and assisted living facilities. (Note: 2014 NEC Article 406.12 applies to new construction only).

Table 4. Specifications

Catalog no.	TR270, TR1107, 9500TR series	TR817, TR1877, TRBR TR6200, TR6300 series	TRSGF, 9560TRS series	TR8200, TR8300 series
Receptacle type	Residential grade duplex & single	Commercial grade duplex & single	Specification grade duplex GFCI	Hospital grade duplex
Wiring type	Back & side wire 9509TR, 9510TR (except 9507 push & side wire)	Back & side wire (except TR817/TR1877 side wire only)	Back & side wire	Back & side wire
Testing & code compliance	<ul style="list-style-type: none"> cULus Listed to UL498, file no. E15058 UL certified to CSA C22.2, no. 42 NOM/ANSI certified. 	<ul style="list-style-type: none"> cULus Listed to UL498, file no. E15058 UL certified to CSA C22.2, no. 42 NOM/ANSI certified TRBR UL verified to Fed. Spec. WC-596G 	<ul style="list-style-type: none"> cULus Listed to UL498, file no. E60120 cUL certified to CSA C22.2, no. 42 Meets all UL943 (GFCI) and UL498 (receptacles) requirements NOM/ANSI certified. 	<ul style="list-style-type: none"> Listed to UL498, file no. E140596 UL verified to Fed. Spec. WC-596 UL certified to CSA C22.2, no. 42, file no. LR16063.
Environmental specifications	Flammability: Meets UL 94 requirements; TR1107, TR270, 9505TR V0 rated; 9507TR, 9508TR, 9510TR V2 rated Temperature rating: -TR1107, TR270, 9505TR -20°C to 60°C (-4°F to 140°F); 9507TR, 9508TR, 9510TR - 20°C to 70°C (-4°F to 158°F)	Flammability: Meets UL 94 requirements; V2 rated Temperature rating: -20°C to 70°C (-4°F to 158°F)	Flammability: Meets UL 94 requirements; V2 rated Temperature rating: -35°C to 66°C (-31°F to 150.8°F)	Flammability: Meets UL 94 requirements; V2 rated Temperature rating: -40°C to 60°C (-40°F to 140°F)
Electrical specifications	Dielectric voltage: Withstands 2000V per UL 498 Current interrupting: Yes, at full-rated current Temperature rise: Max. 30°C (86°F) after 100 cycles of overload @ 150% of rated current (DC)	Dielectric voltage: Withstands 2000V per UL 498 Current interrupting: Yes, at full-rated current Temperature rise: Standard - max. 30°C (86°F) after 100 cycles of overload @ 150% of rated current (DC). Fed. Spec. - max. 30°C (86°F) after 250 cycles of overload @ 200% of rated current (DC)	Dielectric voltage: Withstands 2000V per UL 498 Current interrupting: Yes, at full-rated current Temperature rise: Max. 30°C (86°F) after 100 cycles of overload @ 150% of rated current (DC)	Dielectric voltage: Withstands 2000V per UL 498 Current interrupting: Yes, at full-rated current Temperature rise: Max. 30°C (86°F) after 50 cycles of overload at 250% of rated current (DC)
Mechanical specifications	Terminal accommodation: #14 - 10 AWG Voltage ratings: Permanently marked on device	Terminal accommodation: #14 - 10 AWG Voltage ratings: Permanently marked on device	Terminal accommodation: #14 - 10 AWG Voltage ratings: Permanently marked on device	Terminal accommodation: #14 - 10 AWG Voltage ratings: Permanently marked on device

Project Name:	Prepared By:
Project Number:	Date:
Catalog Number:	Type:

Table 5. Materials

Catalog no.	TR270, TR1107, 9500TR series	TR817, TR1877, TRBR TR6200, TR6300 series	TRSGF, 9560TRS series	TR8200, TR8300 series
Receptacle type	Residential grade duplex & single	Commercial grade duplex & single	Specification grade duplex GFCI	Hospital grade duplex
Body top & bottom	TR1107, TR270, 9505TR - PVC 9507TR, 9508TR - nylon 9510TR - PVC top, nylon bottom	Thermoplastic, nylon	Top - polypropylene Bottom - thermoplastic, PVC	Thermoplastic, nylon
Strap	Galvanized steel TR1107, TR270, 9505TR Nickel-plated steel 9507TR, 9508TR, 9510TR.	Galvanized steel	Galvanized steel	Brass
Contacts	Brass alloy	Brass alloy	Brass alloy	Nickel-plated brass
Terminal screws	Brass/nickel-plated steel	Brass/nickel-plated steel	Brass/nickel-plated steel	Brass/nickel-plated steel
Terminal clamps	Brass-plated 9507TR, 9508TR; steel 9510TR	Steel (TR817/TR1877 N/A)	Steel brass-plated	Nickel-plated brass

Table 6. GFCI status indicator

Test indicator RED LED	Test indicator AMBER LED	Diagnosis	Color suffix
OFF	OFF	Device is functioning properly OR branch circuit may have no power	Manually depress TEST button to trip device. Amber light should come ON <ul style="list-style-type: none"> If Amber light does not come ON, check if there is power to the branch If Amber light does come ON, manually depress the RESET button to restore power to the device If GFCI does not reset, replace GFCI If GFCI does reset, device is functioning properly
OFF	ON	Device is in tripped state	Manually depress the RESET button to restore power to the device <ul style="list-style-type: none"> If GFCI does not reset, replace GFCI
Blinking	OFF	Device's "end of life" indication OR device is in reset state	Manually depress TEST button to trip device. Amber light should come ON <ul style="list-style-type: none"> If Amber light does not come ON, check if there is power to the branch If Amber light does come ON, manually depress the RESET button to restore power to the device If it does not reset, and/or the blinking continues, replace GFCI
Blinking	ON	Device's "end of life" indication OR device is in tripped state	Manually depress the RESET button to restore power to the device <ul style="list-style-type: none"> If it does not reset, and/or the blinking continues, replace GFCI

Table 7. Color ordering information

For ordering devices, include Cat. no. followed by the color code. Decorator series color options: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), V (Ivory), W (White)
Designer series color options: AW (Alpine White), DS (Desert Sand), SG (Silver Granite), WS (White Satin)

Decorator series color options:

A	B	BK	GY	LA	V	W
Almond	Brown	Black	Gray	Lt. Almond	Ivory	White

Designer series color options:

AW	AW	DS	DS	SG	SG	WS	WS
Alpine White		Desert Sand		Silver Granite		White Satin	

Project Name:	Prepared By:
Project Number:	Date:
Catalog Number:	Type:

Product dimensions

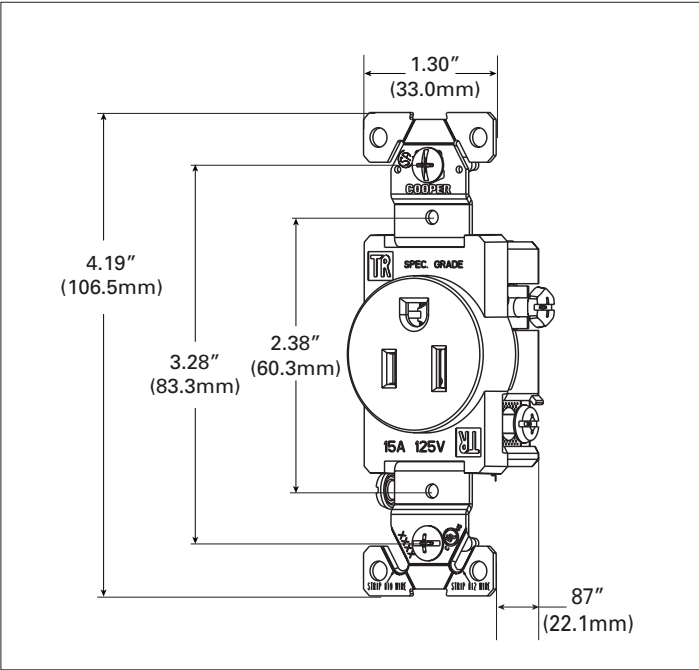


Figure 1. TR817 Line art with dimensions

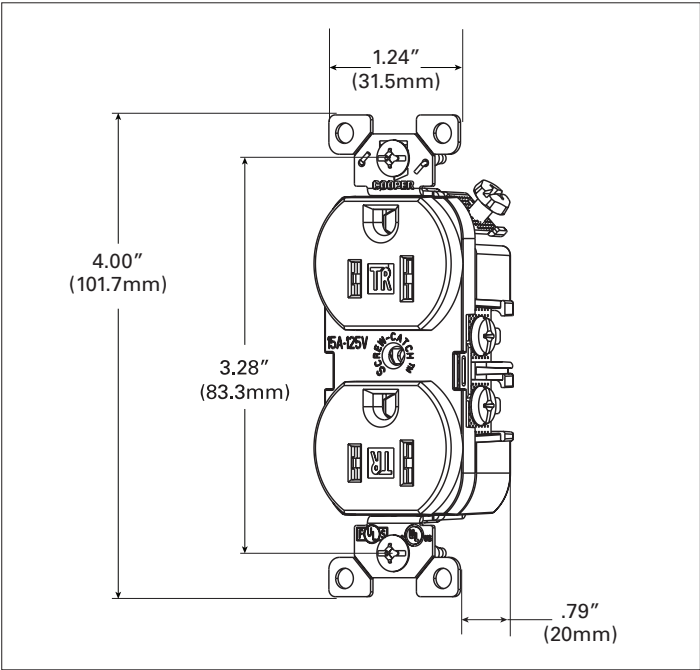


Figure 2. TRBR15 Line art with dimensions

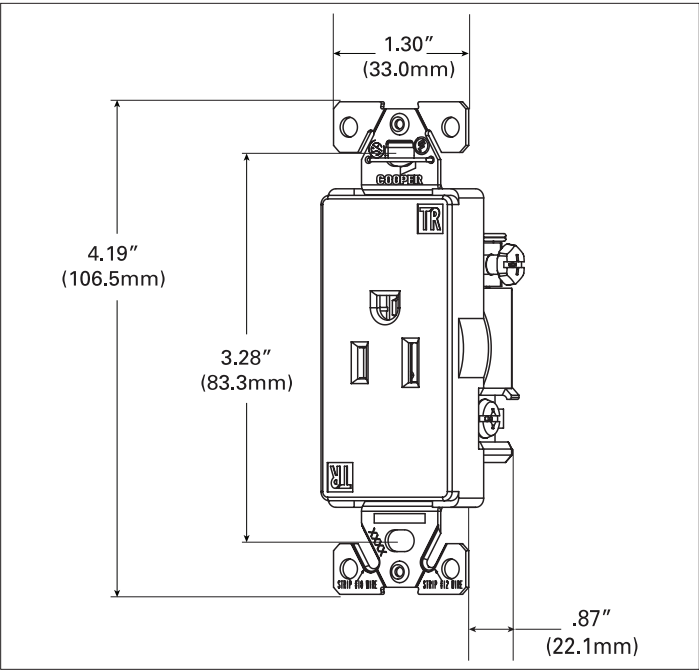


Figure 3. TR6250 Line art with dimensions

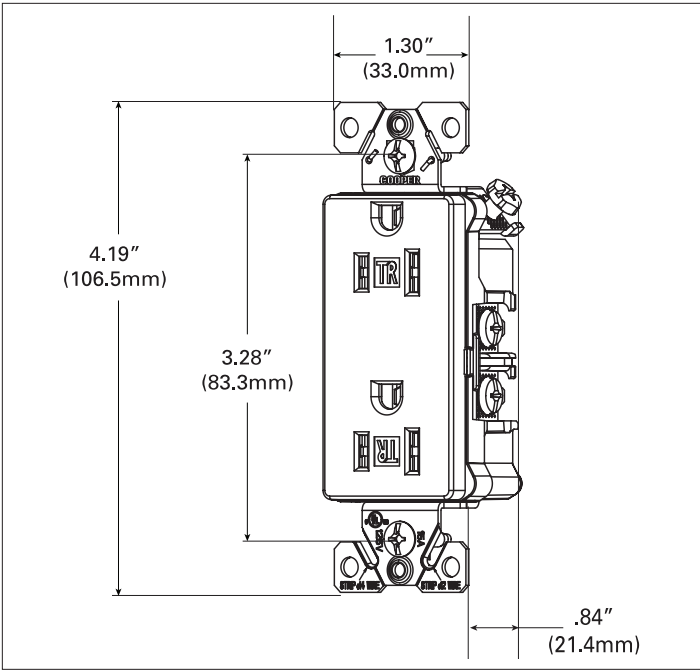


Figure 4. TR6252 Line art with dimensions

Project Name:	Prepared By:
Project Number:	Date:
Catalog Number:	Type:

Product dimensions

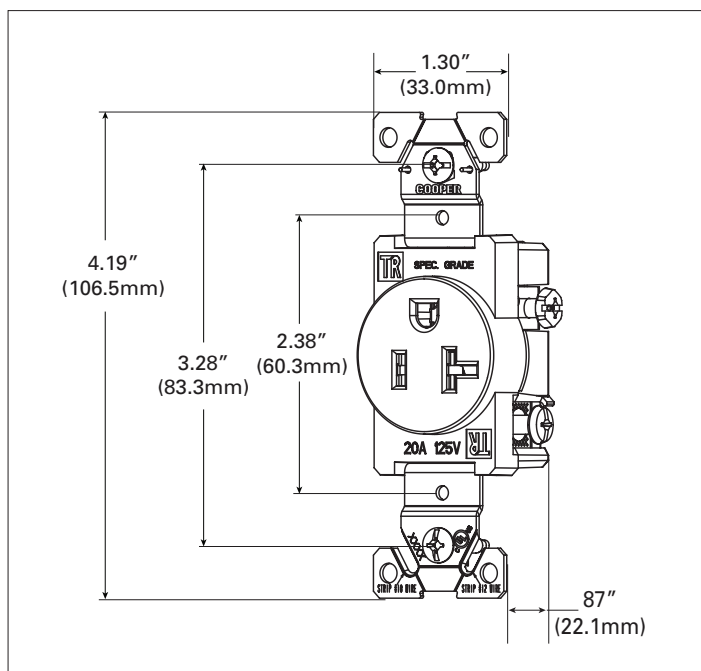


Figure 5. TR1877 Line art with dimensions

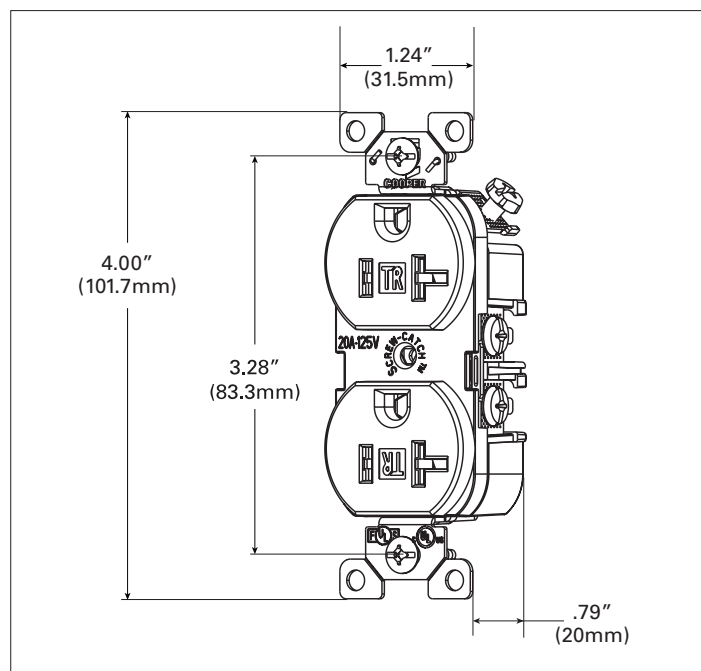


Figure 6. TRBR20 Line art with dimensions

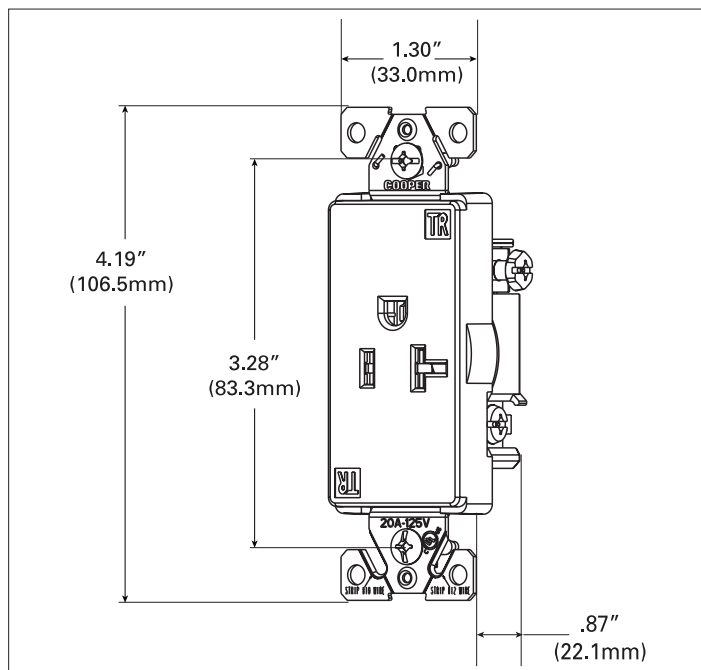


Figure 7. TR6350 Line art with dimensions

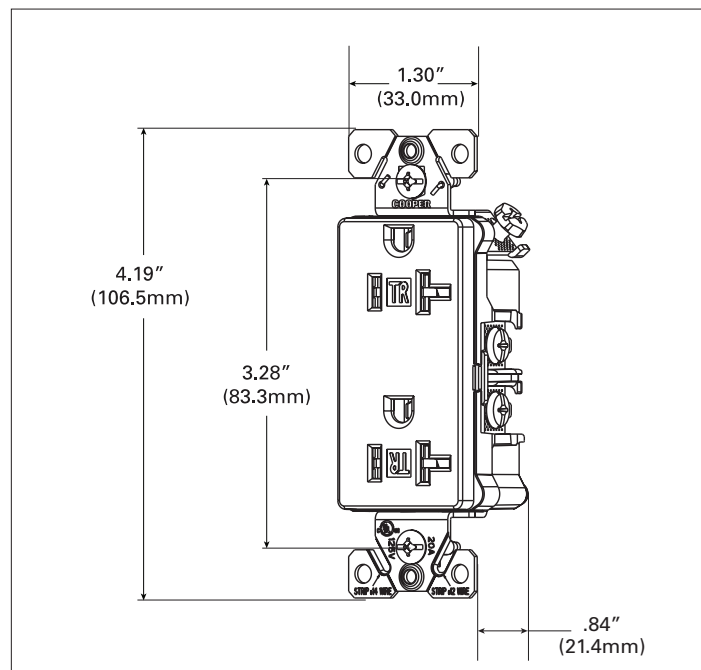


Figure 8. TR6352 Line art with dimensions

Project Name:	Prepared By:
Project Number:	Date:
Catalog Number:	Type:

Product dimensions

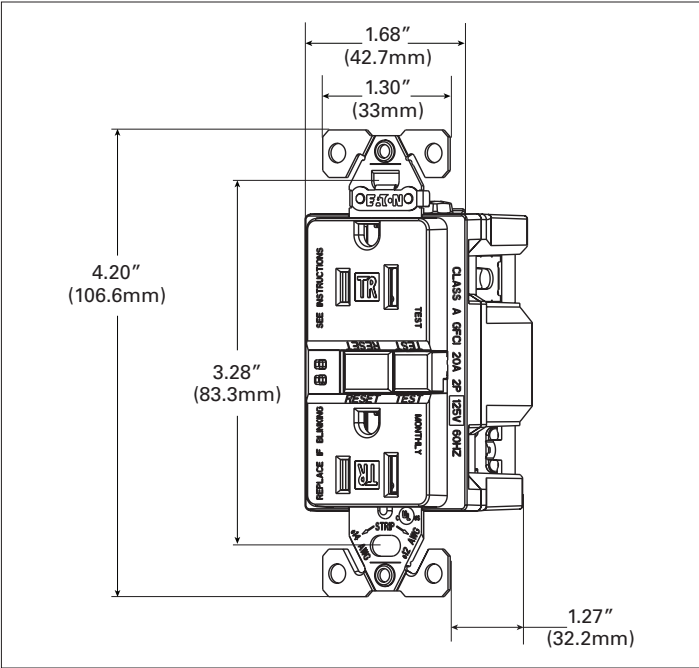


Figure 9. TRSGF15 Line art with dimensions

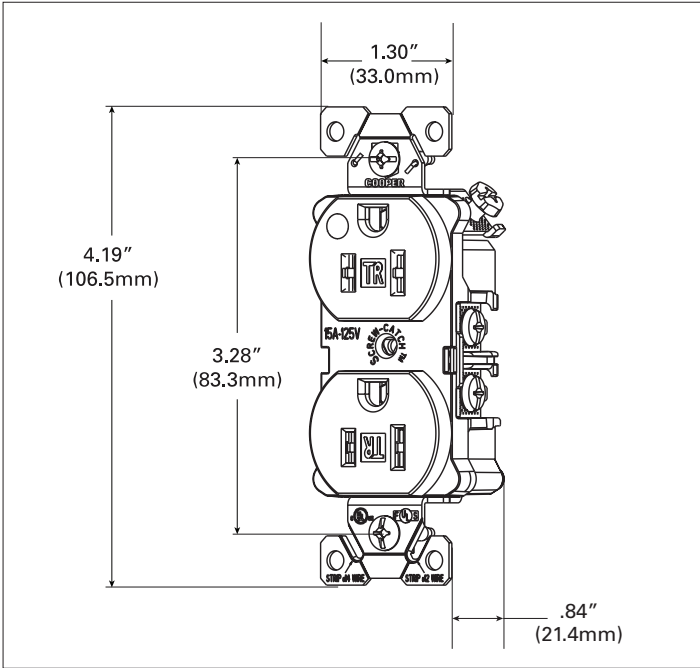


Figure 10. TR8200 Line art with dimensions

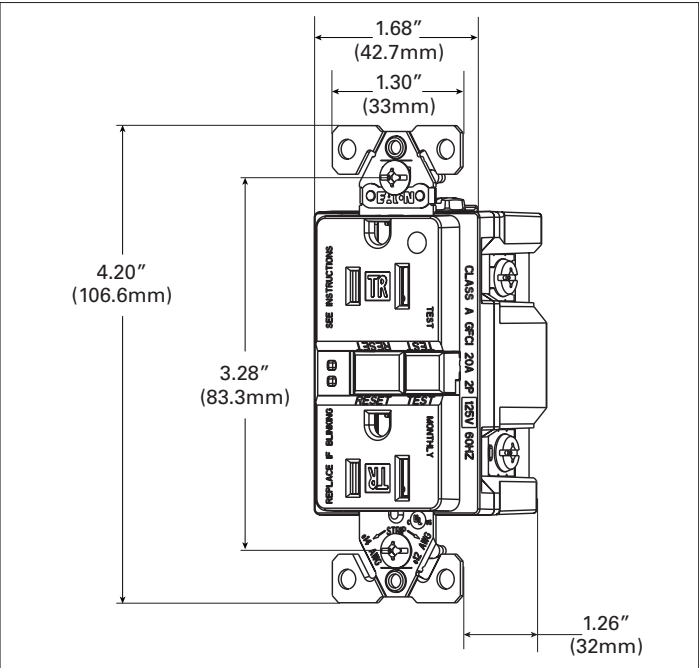


Figure 11. TRSGFH15 Line art with dimensions

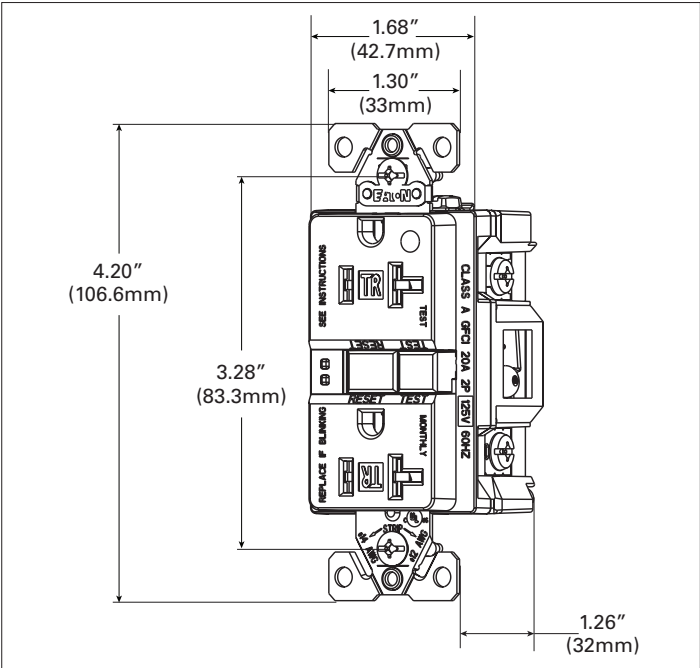


Figure 12. TRSGF20 Line art with dimensions

Project Name:	Prepared By:
Project Number:	Date:
Catalog Number:	Type:

Product dimensions

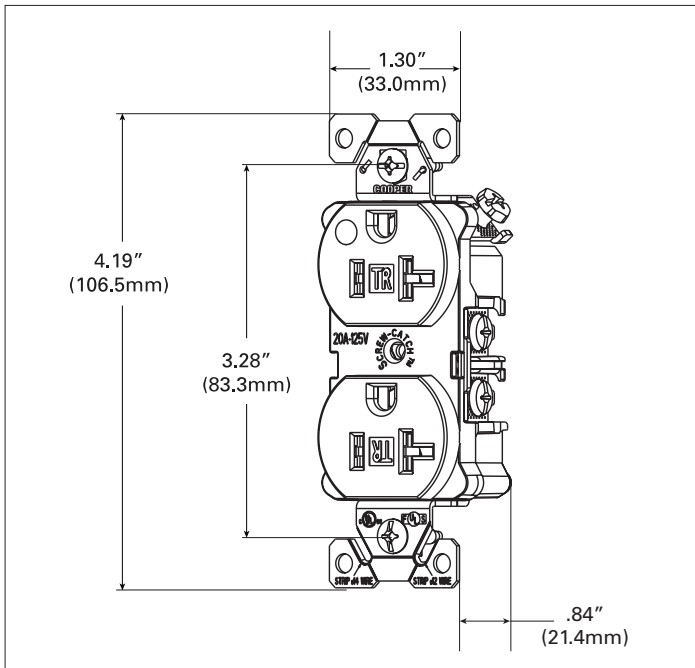


Figure 13. TR8300 Line art with dimensions

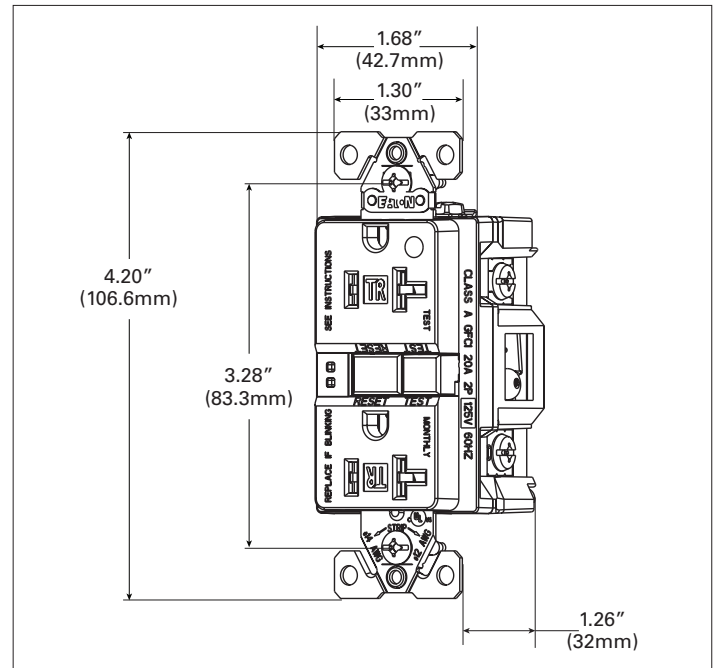





Figure 14. TRSGFH20 Line art with dimensions

Single & duplex tamper resistant self-test GFCI receptacles

Technical Data
Effective June 2015

Project Name:	Prepared By:
Project Number:	Date:
Catalog Number:	Type:

Certifications & compliances

Catalog no.			
TR270	•		•
TR270-9	•		•
TR1107	•		•
TR1107-9	•		•
9505TR	•		•
9507TR	•		•
9508TR	•		•
9510TR	•		•
TR817	•	•	•
TRBR15	•	•	•
TR6250	•	•	•
TR6252	•	•	•
TR1877	•	•	•
TRBR20	•	•	•
TR6350	•	•	•
TR6352	•	•	•
TRSGF15	•	•	•
9566TRS	•	•	•
TR8200	•	•	•
TRVGFH15	•	•	•
TRVGF20	•	•	•
9569TRS	•	•	•
TR8300	•	•	•
TRSGFH20	•	•	•

KEY:  cULus  Fed Spec  NOM

Electrical Sector
203 Cooper Circle
Peachtree City, GA 30269
United States
Eaton.com
Cooperwiringdevices.com

Electrical Sector
Canada Operations
5925 McLaughlin Road
Mississauga, Ontario, L5R 1B8
Canada
EatonCanada.ca
Cooperwiringdevices.com

Electrical Sector
Mexico Operations
Carr. Tlalnepantla -
Cuautitlán Km 178 s/n
Col. Villa Jardín esq.
Cerrada 8 de Mayo
Cuautitlán, México CP 54800
México
Eaton.mx
Cooperwiringdevices.com

Eaton
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com

© 2015 Eaton
All Rights Reserved
Printed in USA
Publication No. TD610008EN
June 2015

Eaton is a registered trademark.

All other trademarks are property
of their respective owners.