

TR26342DVSGRY
Tool-less Decorator 20A/125V


Tool-free terminations brought to you by Legrand

TR26342DVSW

The PowerHold™ receptacle device maximizes contractor productivity, reduces errors, and enhances profitability while delivering faster, more reliable results. With fast terminations, superior wiring retention and color-coded levers that ensure accurate connections, this standard receptacle makes the installation process quick, easy, and safe. Best suited for MDU, hospitality, prefab, and commercial applications.

Features & Benefits

- **Patented Terminal Design:** Toothed design to provide a secure connection for solid and stranded copper wire from #14 AWG to #10 AWG.
- **Superior Wire Retention:** Retention force greater than 30 lbs. ensures consistent, reliable connections*.
- **Error-Free Installation:** Color-coded levers to reduce the risk of miswiring, while an audible snap confirms a securely closed lever.
- **Safe Easy Wiring:** No exposed live terminals.
- **Impact- Resistant:** Nylon face for durability.
- **Triple Wipe Brass Power Contacts:** For lasting retention.
- **Fast Terminations:** Wire our device in under 10 seconds, boost productivity and finish ahead of schedule.
- **Dual Split Circuit:** Only tool-less device on the market to allow breaking the hot and neutral tabs to help prevent overloading a circuit with a shared neutral.
- **Sleek, Space- Saving Design:** Shallowest design on the market without compromising on performance.
- **Robust and Ergonomic Levers:** Make terminations easier with larger levers.
- **Easy to Clean:** Chemical-resistant face.

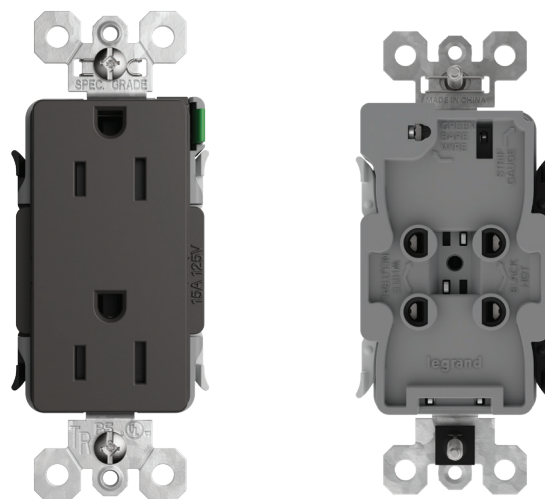

TR26342DVS

Vertical Markets

- | | | | |
|---------------|------------------|------------------|---------------|
| ▪ Commercial | ▪ Retail | ▪ Multi Dwelling | ▪ Hospitality |
| ▪ Residential | ▪ Prefabrication | ▪ Education | |

Compliance



UL Listed, File Number E140596,

Standard UL498, CSA/CUL approved, Standard CSA 22.2 No. 42 General Use Receptacles, Conforms to NEMA® WD-1 and WD-6

*based on #12 AWG Solid Copper

Technical Information

Performance

Electrical

Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current

Mechanical

Terminal Identification	Terminal levers identified in accordance with UL498 (Black, White, Green)
Terminal Accommodation	#14 AWG - #10 AWG solid or stranded copper conductor only
Product Identification	Ratings are permanent part of device

Material Specs


Face	Nylon - Impact-Resistant
Body	Nylon - Impact-Resistant
Line Contacts	.031 Copper Alloy
Mounting Strap	.040 Zinc-Plated Steel
Ground Contacts	.012 Brass Alloy
Tamper-Resistant Shutters	Thermoplastic
Flat Head Mounting Screws	Zinc-Plated Steel
Auto-Ground Clip	Stainless Steel - Nickel-Plated
Mounting Screws	Tri-Drive Steel

Environmental

Operating Temperature	Maximum continuous +60°C, minimum -40°C (without impact)
Flammability	UL94 V2
Only for indoor use	Nickel Plated Brass

Warranty

1 year

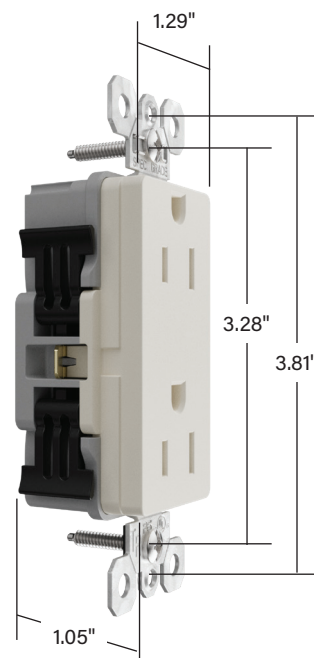

Depth (into Wallbox) = 1.05"
TR26342DVSLA



Ordering Information

Catalog Number	Description	Ratings	Color	NEMA Config.
TR15DVS	PowerHold™ TR15 Tool-less Duplex Receptacle	15A , 125V	Brown	5-15R
TR15DVSBK	PowerHold™ TR15 Tool-less Duplex Receptacle	15A , 125V	Black	5-15R
TR15DVSBLL	PowerHold™ TR15 Tool-less Duplex Receptacle	15A , 125V	Blue	5-15R
TR15DVSGRY	PowerHold™ TR15 Tool-less Duplex Receptacle	15A , 125V	Gray	5-15R
TR15DVSI	PowerHold™ TR15 Tool-less Duplex Receptacle	15A , 125V	Ivory	5-15R
TR15DVSLA	PowerHold™ TR15 Tool-less Duplex Receptacle	15A , 125V	Light Almond	5-15R
TR15DVSOR	PowerHold™ TR15 Tool-less Duplex Receptacle	15A , 125V	Orange	5-15R
TR15DVSRED	PowerHold™ TR15 Tool-less Duplex Receptacle	15A , 125V	Red	5-15R
TR15DVSW	PowerHold™ TR15 Tool-less Duplex Receptacle	15A , 125V	White	5-15R
TR20DVS	PowerHold™ TR20 Tool-less Duplex Receptacle	20A , 125V	Brown	5-20R
TR20DVSBK	PowerHold™ TR20 Tool-less Duplex Receptacle	20A , 125V	Black	5-20R
TR20DVSBLL	PowerHold™ TR20 Tool-less Duplex Receptacle	20A , 125V	Blue	5-20R
TR20DVSGRY	PowerHold™ TR20 Tool-less Duplex Receptacle	20A , 125V	Gray	5-20R
TR20DVSI	PowerHold™ TR20 Tool-less Duplex Receptacle	20A , 125V	Ivory	5-20R
TR20DVSLA	PowerHold™ TR20 Tool-less Duplex Receptacle	20A , 125V	Light Almond	5-20R
TR20DVSOR	PowerHold™ TR20 Tool-less Duplex Receptacle	20A , 125V	Orange	5-20R
TR20DVSRED	PowerHold™ TR20 Tool-less Duplex Receptacle	20A , 125V	Red	5-20R
TR20DVSW	PowerHold™ TR20 Tool-less Duplex Receptacle	20A , 125V	White	5-20R
TR26242DVS	PowerHold™ TR26242 Tool-less Decorator Receptacle	15A , 125V	Brown	5-20R
TR26242DVSBK	PowerHold™ TR26242 Tool-less Decorator Receptacle	15A , 125V	Black	5-15R
TR26242DVSBLL	PowerHold™ TR26242 Tool-less Decorator Receptacle	15A , 125V	Blue	5-15R
TR26242DVSGRY	PowerHold™ TR26242 Tool-less Decorator Receptacle	15A , 125V	Gray	5-15R
TR26242DVSI	PowerHold™ TR26242 Tool-less Decorator Receptacle	15A , 125V	Ivory	5-15R
TR26242DVSLA	PowerHold™ TR26242 Tool-less Decorator Receptacle	15A , 125V	Light Almond	5-15R
TR26242DVSOR	PowerHold™ TR26242 Tool-less Decorator Receptacle	15A , 125V	Orange	5-15R
TR26242DVSRED	PowerHold™ TR26242 Tool-less Decorator Receptacle	15A , 125V	Red	5-15R
TR26242DVSW	PowerHold™ TR26242 Tool-less Decorator Receptacle	15A , 125V	White	5-15R
TR26342DVS	PowerHold™ TR26342 Tool-less Decorator Receptacle	20A/125V	Brown	5-20R
TR26342DVSBK	PowerHold™ TR26342 Tool-less Decorator Receptacle	20A/125V	Black	5-20R
TR26342DVSBLL	PowerHold™ TR26342 Tool-less Decorator Receptacle	20A/125V	Blue	5-20R
TR26342DVSGRY	PowerHold™ TR26342 Tool-less Decorator Receptacle	20A/125V	Gray	5-20R
TR26342DVSI	PowerHold™ TR26342 Tool-less Decorator Receptacle	20A/125V	Ivory	5-20R
TR26342DVSLA	PowerHold™ TR26342 Tool-less Decorator Receptacle	20A/125V	Light Almond	5-20R
TR26342DVSOR	PowerHold™ TR26342 Tool-less Decorator Receptacle	20A/125V	Orange	5-20R
TR26342DVSRED	PowerHold™ TR26342 Tool-less Decorator Receptacle	20A/125V	Red	5-20R
TR26342DVSW	PowerHold™ TR26342 Tool-less Decorator Receptacle	20A/125V	White	5-20R


NEMA
5-15R

NEMA
5-20R



PASS & SEYMOUR®
PowerHold™
Tamper-Resistant 15A and 20A, 125V

All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.




Legrand, North America
60 Woodlawn Street
West Hartford, CT 06110
1-877-295-3472
www.legrand.us

Canada
1-844-977-3783
www.legrand.ca

FOLLOW US



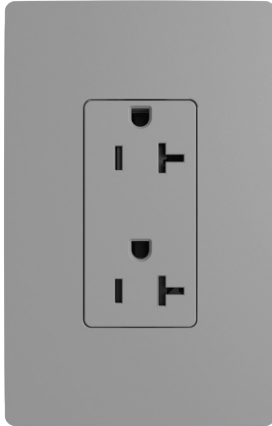

TR26342DVSGRY
Tool-less Decorator 20A/125V


Tool-free terminations brought to you by Legrand

TR26342DVSW

The PowerHold™ receptacle device maximizes contractor productivity, reduces errors, and enhances profitability while delivering faster, more reliable results. With fast terminations, superior wiring retention and color-coded levers that ensure accurate connections, this standard receptacle makes the installation process quick, easy, and safe. Best suited for MDU, hospitality, prefab, and commercial applications.

Features & Benefits

- **Patented Terminal Design:** Toothed design to provide a secure connection for solid and stranded copper wire from #14 AWG to #10 AWG.
- **Superior Wire Retention:** Retention force greater than 30 lbs. ensures consistent, reliable connections*.
- **Error-Free Installation:** Color-coded levers to reduce the risk of miswiring, while an audible snap confirms a securely closed lever.
- **Safe Easy Wiring:** No exposed live terminals.
- **Impact- Resistant:** Nylon face for durability.
- **Triple Wipe Brass Power Contacts:** For lasting retention.
- **Fast Terminations:** Wire our device in under 10 seconds, boost productivity and finish ahead of schedule.
- **Dual Split Circuit:** Only tool-less device on the market to allow breaking the hot and neutral tabs to help prevent overloading a circuit with a shared neutral.
- **Sleek, Space- Saving Design:** Shallowest design on the market without compromising on performance.
- **Robust and Ergonomic Levers:** Make terminations easier with larger levers.
- **Easy to Clean:** Chemical-resistant face.

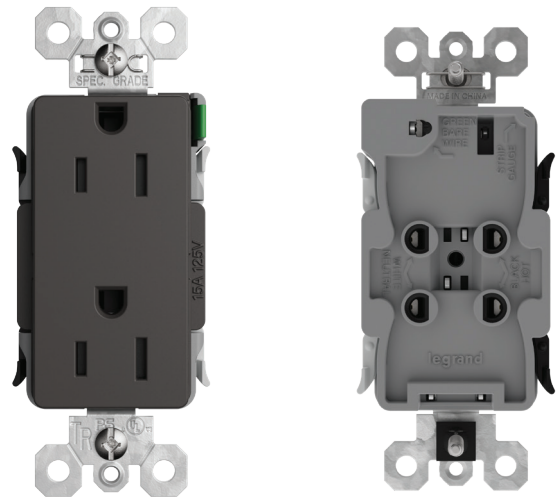

TR26342DVS

Vertical Markets

- | | | | |
|---------------|------------------|------------------|---------------|
| ▪ Commercial | ▪ Retail | ▪ Multi Dwelling | ▪ Hospitality |
| ▪ Residential | ▪ Prefabrication | ▪ Education | |

Compliance



UL Listed, File Number E140596,

Standard UL498, CSA/CUL approved, Standard CSA 22.2 No. 42 General Use Receptacles, Conforms to NEMA® WD-1 and WD-6

*based on #12 AWG Solid Copper

Technical Information

Performance

Electrical

Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current

Mechanical

Terminal Identification	Terminal levers identified in accordance with UL498 (Black, White, Green)
Terminal Accommodation	#14 AWG - #10 AWG solid or stranded copper conductor only
Product Identification	Ratings are permanent part of device

Material Specs


Face	Nylon - Impact-Resistant
Body	Nylon - Impact-Resistant
Line Contacts	.031 Copper Alloy
Mounting Strap	.040 Zinc-Plated Steel
Ground Contacts	.012 Brass Alloy
Tamper-Resistant Shutters	Thermoplastic
Flat Head Mounting Screws	Zinc-Plated Steel
Auto-Ground Clip	Stainless Steel - Nickel-Plated
Mounting Screws	Tri-Drive Steel

Environmental

Operating Temperature	Maximum continuous +60°C, minimum -40°C (without impact)
Flammability	UL94 V2
Only for indoor use	Nickel Plated Brass

Warranty

1 year

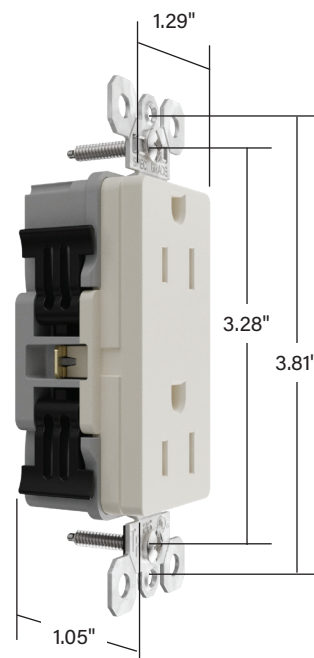

Depth (into Wallbox) = 1.05"
TR26342DVSLA



Ordering Information

Catalog Number	Description	Ratings	Color	NEMA Config.
TR15DVS	PowerHold™ TR15 Tool-less Duplex Receptacle	15A , 125V	Brown	5-15R
TR15DVSBK	PowerHold™ TR15 Tool-less Duplex Receptacle	15A , 125V	Black	5-15R
TR15DVSBLL	PowerHold™ TR15 Tool-less Duplex Receptacle	15A , 125V	Blue	5-15R
TR15DVSGRY	PowerHold™ TR15 Tool-less Duplex Receptacle	15A , 125V	Gray	5-15R
TR15DVSI	PowerHold™ TR15 Tool-less Duplex Receptacle	15A , 125V	Ivory	5-15R
TR15DVSLA	PowerHold™ TR15 Tool-less Duplex Receptacle	15A , 125V	Light Almond	5-15R
TR15DVSOR	PowerHold™ TR15 Tool-less Duplex Receptacle	15A , 125V	Orange	5-15R
TR15DVSRED	PowerHold™ TR15 Tool-less Duplex Receptacle	15A , 125V	Red	5-15R
TR15DVSW	PowerHold™ TR15 Tool-less Duplex Receptacle	15A , 125V	White	5-15R
TR20DVS	PowerHold™ TR20 Tool-less Duplex Receptacle	20A , 125V	Brown	5-20R
TR20DVSBK	PowerHold™ TR20 Tool-less Duplex Receptacle	20A , 125V	Black	5-20R
TR20DVSBLL	PowerHold™ TR20 Tool-less Duplex Receptacle	20A , 125V	Blue	5-20R
TR20DVSGRY	PowerHold™ TR20 Tool-less Duplex Receptacle	20A , 125V	Gray	5-20R
TR20DVSI	PowerHold™ TR20 Tool-less Duplex Receptacle	20A , 125V	Ivory	5-20R
TR20DVSLA	PowerHold™ TR20 Tool-less Duplex Receptacle	20A , 125V	Light Almond	5-20R
TR20DVSOR	PowerHold™ TR20 Tool-less Duplex Receptacle	20A , 125V	Orange	5-20R
TR20DVSRED	PowerHold™ TR20 Tool-less Duplex Receptacle	20A , 125V	Red	5-20R
TR20DVSW	PowerHold™ TR20 Tool-less Duplex Receptacle	20A , 125V	White	5-20R
TR26242DVS	PowerHold™ TR26242 Tool-less Decorator Receptacle	15A , 125V	Brown	5-20R
TR26242DVSBK	PowerHold™ TR26242 Tool-less Decorator Receptacle	15A , 125V	Black	5-15R
TR26242DVSBLL	PowerHold™ TR26242 Tool-less Decorator Receptacle	15A , 125V	Blue	5-15R
TR26242DVSGRY	PowerHold™ TR26242 Tool-less Decorator Receptacle	15A , 125V	Gray	5-15R
TR26242DVSI	PowerHold™ TR26242 Tool-less Decorator Receptacle	15A , 125V	Ivory	5-15R
TR26242DVSLA	PowerHold™ TR26242 Tool-less Decorator Receptacle	15A , 125V	Light Almond	5-15R
TR26242DVSOR	PowerHold™ TR26242 Tool-less Decorator Receptacle	15A , 125V	Orange	5-15R
TR26242DVSRED	PowerHold™ TR26242 Tool-less Decorator Receptacle	15A , 125V	Red	5-15R
TR26242DVSW	PowerHold™ TR26242 Tool-less Decorator Receptacle	15A , 125V	White	5-15R
TR26342DVS	PowerHold™ TR26342 Tool-less Decorator Receptacle	20A/125V	Brown	5-20R
TR26342DVSBK	PowerHold™ TR26342 Tool-less Decorator Receptacle	20A/125V	Black	5-20R
TR26342DVSBLL	PowerHold™ TR26342 Tool-less Decorator Receptacle	20A/125V	Blue	5-20R
TR26342DVSGRY	PowerHold™ TR26342 Tool-less Decorator Receptacle	20A/125V	Gray	5-20R
TR26342DVSI	PowerHold™ TR26342 Tool-less Decorator Receptacle	20A/125V	Ivory	5-20R
TR26342DVSLA	PowerHold™ TR26342 Tool-less Decorator Receptacle	20A/125V	Light Almond	5-20R
TR26342DVSOR	PowerHold™ TR26342 Tool-less Decorator Receptacle	20A/125V	Orange	5-20R
TR26342DVSRED	PowerHold™ TR26342 Tool-less Decorator Receptacle	20A/125V	Red	5-20R
TR26342DVSW	PowerHold™ TR26342 Tool-less Decorator Receptacle	20A/125V	White	5-20R


NEMA
5-15R

NEMA
5-20R



PASS & SEYMOUR®
PowerHold™
Tamper-Resistant 15A and 20A, 125V

All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.



Legrand, North America
60 Woodlawn Street
West Hartford, CT 06110
1-877-295-3472
www.legrand.us

Canada
1-844-977-3783
www.legrand.ca

FOLLOW US

