



TWS LED

LED Wall Luminaire

Catalog
Number

Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.


Specifications

Width: 6-3/4"
(17.2 cm)

Height: 10-7/8"
(27.7 cm)

Depth: 5-5/16"
(13.5 cm)

Weight: 3.19 lbs
(1.45 kg)

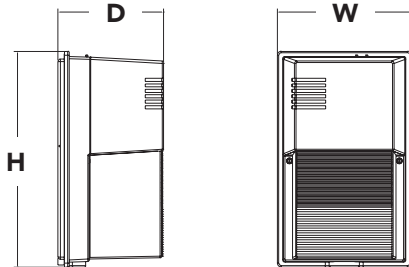

Introduction

The popular TWS luminaire is now available with long-lasting, energy-efficient LED technology. Featuring a classic dayform, the TWS LED offers a traditional appearance and is powered by advanced LEDs.

The TWS LED luminaire is powerful yet energy efficient, capable of replacing up to a 70W HPS or 100W MH wall pack while saving up to 80% in energy costs. With long-life LEDs, the TWS LED eliminates frequent lamp and ballast replacements associated with traditional technologies.

Ordering Information

EXAMPLE: TWS LED P1 50K 120 PE

TWS LED					
Series	Performance Package	Color Temperature	Voltage	Control Options	Finish
TWS LED	P1 1476 lumens	50K 5000K ¹	120 120V ²	PE Photoelectric cell, button type	(blank) Dark bronze

Accessories

Ordered and shipped separately.

TWSWG

Wire Guard

NOTES

- Corrected color temperature (CCT) shown is nominal per ANSI C78, 377-2008.
- 120V driver operates on 120V.

FEATURES & SPECIFICATIONS

INTENDED USE

The TWS LED combines traditional wall pack design with high-output LEDs to provide an energy-efficient, low maintenance LED wall pack suitable for replacing up to 70W HPS or 100W MH fixtures. The traditional shape helps maintain building aesthetics when replacing only a portion of your building's wall packs. TWS LED is for outdoor applications such as personnel doors, loading areas, driveways and parking areas.

CONSTRUCTION

Back plate is die-cast aluminum. Front cover is impact-resistant polycarbonate which is fully gasketed. All electronics are protected in the upper housing. Housing is sealed against moisture and environmental contaminants.

FINISH

UV stabilized polycarbonate front cover has dark bronze color which provides superior resistance to corrosion and weathering and that can withstand extreme climate changes without cracking or peeling.

OPTICS

Protective polycarbonate lens covers the LEDs. Prismatic front cover and precision-molded reflector for superior uniformity and fixture spacing. Light engine is available in 5000K (70 min. CRI).

ELECTRICAL

Light engine consists of two high-powered, long-life, high-efficacy LEDs mounted on an internal aluminum heat sink to maximize heat dissipation and promote long life (L95/100,000 hours at 40°C). Driver and integral photocell operate at 120V and are fully enclosed in the upper housing. There are no user serviceable parts.

INSTALLATION

Back housing easily mounts to any recessed junction box. With all electronics in upper housing the open lower section makes wiring easy. Mount on any vertical surface. Not recommended in applications where a sprayed stream of water can come in direct contact with polycarbonate lens.

LISTINGS

UL Certified to US and Canadian safety standards for wet-location mounting higher than 4 feet off the ground.

Rated for -40°C to 40°C ambient temperature.

WARRANTY

5-year limited warranty. Complete warranty terms located at:
www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx.

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications are subject to change without notice.



One Lithonia Way • Conyers, Georgia 30012 • Phone: 800.279.8041 • www.lithonia.com
© 2013-2017 Acuity Brands Lighting, Inc. All rights reserved.

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Actual performance may differ as a result of end-user environment and application.

Performance Package	CCT	System Watts	50K (5000K, 67 CRI)				
			Lumens	B	U	G	LPW
P1	5000K	25W	1,476	1	3	1	60

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient		Lumen Multiplier
0°C	32°F	1.03
10°C	50°F	1.02
20°C	68°F	1.01
25°C	77°F	1.00
30°C	86°F	0.99
40°C	104°F	0.98

Electrical Load

		Current (A)
LED Package	System Watts	120
P1	25W	0.26

Projected LED Lumen Maintenance


Data references the extrapolated performance projections in a **40°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25,000	50,000	55,000	100,000
Lumen Maintenance Factor	1.0	0.98	0.97	0.97	0.95

Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit the [Lithonia Lighting TWS LED homepage](#). Tested in accordance with IESNA LM-79 and LM-80 standards

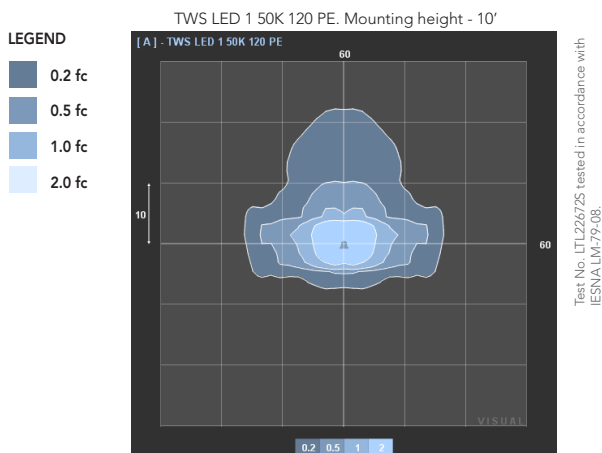

Lighting Facts Labels

Lithonia Lighting

Lighting facts®

A Program of the U.S. DOE

Light Output (Lumens) 1476

Watts 24.64

Lumens per Watt (Efficacy) 59.9

Color Accuracy 70

Color Rendering Index (CRI)

Light Color 5000 (Daylight)

Correlated Color Temperature (CCT)

Warm White 3000K Bright White 4500K Daylight 6500K

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: NJSM-HWML34 (7/28/2016)

Model Number: TWS LED P1 50K 120 PE BZ

Type: Luminaire - Other





TWS LED

LED Wall Luminaire

Catalog
Number

Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.


Specifications

Width: 6-3/4"
(17.2 cm)

Height: 10-7/8"
(27.7 cm)

Depth: 5-5/16"
(13.5 cm)

Weight: 3.19 lbs
(1.45 kg)

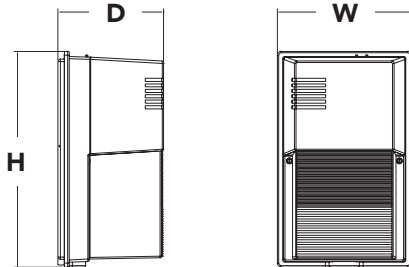

Introduction

The popular TWS luminaire is now available with long-lasting, energy-efficient LED technology. Featuring a classic dayform, the TWS LED offers a traditional appearance and is powered by advanced LEDs.

The TWS LED luminaire is powerful yet energy efficient, capable of replacing up to a 70W HPS or 100W MH wall pack while saving up to 80% in energy costs. With long-life LEDs, the TWS LED eliminates frequent lamp and ballast replacements associated with traditional technologies.

Ordering Information

EXAMPLE: TWS LED P1 50K 120 PE

TWS LED					
Series	Performance Package	Color Temperature	Voltage	Control Options	Finish
TWS LED	P1 1476 lumens	50K 5000K ¹	120 120V ²	PE Photoelectric cell, button type	(blank) Dark bronze

Accessories

Ordered and shipped separately.

TWSWG

Wire Guard

NOTES

- Corrected color temperature (CCT) shown is nominal per ANSI C78, 377-2008.
- 120V driver operates on 120V.

FEATURES & SPECIFICATIONS

INTENDED USE

The TWS LED combines traditional wall pack design with high-output LEDs to provide an energy-efficient, low maintenance LED wall pack suitable for replacing up to 70W HPS or 100W MH fixtures. The traditional shape helps maintain building aesthetics when replacing only a portion of your building's wall packs. TWS LED is for outdoor applications such as personnel doors, loading areas, driveways and parking areas.

CONSTRUCTION

Back plate is die-cast aluminum. Front cover is impact-resistant polycarbonate which is fully gasketed. All electronics are protected in the upper housing. Housing is sealed against moisture and environmental contaminants.

FINISH

UV stabilized polycarbonate front cover has dark bronze color which provides superior resistance to corrosion and weathering and that can withstand extreme climate changes without cracking or peeling.

OPTICS

Protective polycarbonate lens covers the LEDs. Prismatic front cover and precision-molded reflector for superior uniformity and fixture spacing. Light engine is available in 5000K (70 min. CRI).

ELECTRICAL

Light engine consists of two high-powered, long-life, high-efficacy LEDs mounted on an internal aluminum heat sink to maximize heat dissipation and promote long life (L95/100,000 hours at 40°C). Driver and integral photocell operate at 120V and are fully enclosed in the upper housing. There are no user serviceable parts.

INSTALLATION

Back housing easily mounts to any recessed junction box. With all electronics in upper housing the open lower section makes wiring easy. Mount on any vertical surface. Not recommended in applications where a sprayed stream of water can come in direct contact with polycarbonate lens.

LISTINGS

UL Certified to US and Canadian safety standards for wet-location mounting higher than 4 feet off the ground.

Rated for -40°C to 40°C ambient temperature.

WARRANTY

5-year limited warranty. Complete warranty terms located at:
www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx.

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications are subject to change without notice.



One Lithonia Way • Conyers, Georgia 30012 • Phone: 800.279.8041 • www.lithonia.com
© 2013-2017 Acuity Brands Lighting, Inc. All rights reserved.

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Actual performance may differ as a result of end-user environment and application.

Performance Package	CCT	System Watts	50K (5000K, 67 CRI)				
			Lumens	B	U	G	LPW
P1	5000K	25W	1,476	1	3	1	60

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient		Lumen Multiplier
0°C	32°F	1.03
10°C	50°F	1.02
20°C	68°F	1.01
25°C	77°F	1.00
30°C	86°F	0.99
40°C	104°F	0.98

Electrical Load

		Current (A)
LED Package	System Watts	120
P1	25W	0.26

Projected LED Lumen Maintenance


Data references the extrapolated performance projections in a **40°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25,000	50,000	55,000	100,000
Lumen Maintenance Factor	1.0	0.98	0.97	0.97	0.95

Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit the [Lithonia Lighting TWS LED homepage](#). Tested in accordance with IESNA LM-79 and LM-80 standards

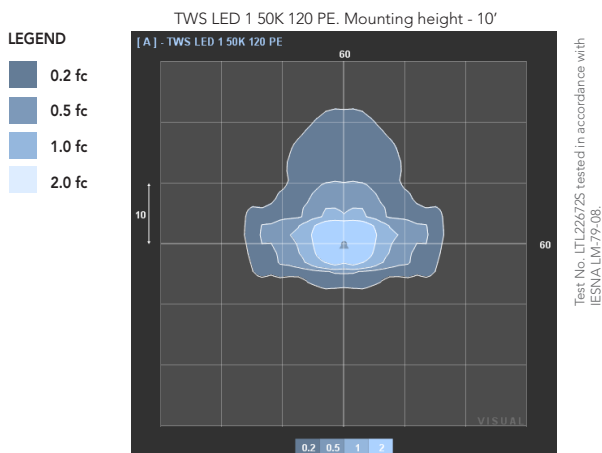

Lighting Facts Labels

Lithonia Lighting

Lighting facts®

A Program of the U.S. DOE

Light Output (Lumens) 1476

Watts 24.64

Lumens per Watt (Efficacy) 59.9

Color Accuracy 70

Color Rendering Index (CRI)

Light Color 5000 (Daylight)

Correlated Color Temperature (CCT)

Warm White 3000K Bright White 4500K Daylight 6500K

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: NJSM-HWML34 (7/28/2016)

Model Number: TWS LED P1 50K 120 PE BZ

Type: Luminaire - Other

