



ELLIOTT ELECTRIC SUPPLY

We Deliver...Lower Cost, Quality Products, & Personal Service

3804 South Street
75964-7263, TX Nacogdoches
Phone: 936-569-7941
Fax: 936-560-4685



U2594X 320A 3PH Oh/Ug 7T HD LVR Bypass Meter Socket

Milbank MFG.

Catalog Number	U2594X
Manufacturer	Milbank MFG.
Description	Meter Socket, 320 A, 34-1/8 In Overall Height, 19 In Overall Width, 6-1/2 In Overall Length, Surface Mount, 3 Phases, Large Closing Plate Hub, 7 Jaws, 4 Wires, 600 V Ac, Overhead/Underground Feed, 56 LB
Weight per unit	56.0 (lbs/each)
Product Category	Residential Single Meter Socke

Features

Bypass Switch Type	LEVER
Circuit Configuration	3 PHASE 4 WIRE
Knockouts	(2) 4 Inch, (1) 3 Inch, (1) 1 Inch, (1) 1/4 Inch Concentric Knockout
Service Type	OVERHEAD/UNDERGROUND
Wire Size	3/8 Inch-16 TPI Stud (Line/Load)

Dimensions and Weight

Size	19 Inch W x 6-1/2 Inch D x 34-1/8 Inch H
------	--

Descriptions

Additional Information	INCLUDES 3/8 INCH X 16 TPI LINE/LOAD STUD
Commodity Description	RESIDENTIAL SINGLE METER SOCKETS
Description	320A 3PH OH/UG 7T HD LVR BYPASS METER SOCKET

Manufacturer Information

GTIN	00784572135529
Model	U2594
UPC	784572135529

Taxonomies, Classifications, and Categories

Category Description	TEMP. POWER PANELS & ACCESSORIES
Type	RINGLESS

Packaging

Carton	1
Package	2
Weight Per each	56

Uses, Certifications, and Standards


Approval	UL mA
----------	-------

Link & Lever Bypass Single Position


320 amp | 4 & 7 Terminal | Ringless



U2120-X

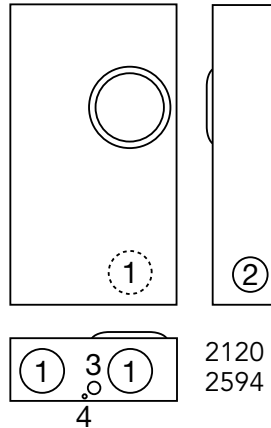

U2827-X

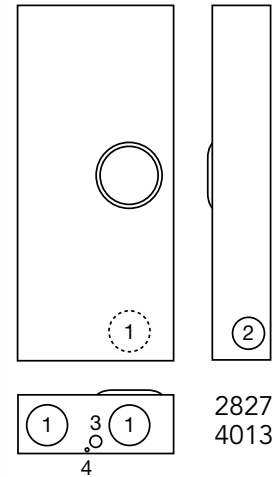

320 amp | 7 Terminal | Ringless | Lever Bypass | Single Position | Side Wireway

Catalog Number	Terminal	Service	Hub	Connectors CU/AL		Bypass	Dimensions			Knockouts			
				Line	Load		D"	W"	H"	1	2	3	4
U2120-X	7	UG	C.P.	3/8"x16 Studs		Lever	6½	17¾	31¾	4	3	1	¼
U4013-X	7	OH/UG	C.P.	3/8"x16 Studs		Lever	6½	19	34½	4	3	1	¼
U2594-X	7	OH/UG	C.P.	3/8"x16 Studs		Lever	6½	19¾	34½	4	3	1	¼
U2827-X*	7	OH/UG	C.P.	3/8"x16 Studs		non-bypass	6½	17¾	31	4	3	1	¼

Notes

- **Bypass:** Lever supplies clamping action on meter spades and operates bypass device. *U2827 has lever with jaw clamping capabilities but no bypass.
- **Connector Kits:** Stud type units are supplied with 3/8"x16 hex head nuts with Belleville washers. Order two connector kits to cover both line and load. For single lug connector kits for the U2120 and U2594 units, order as extra K3082 (350 kcmil) or K3441 (600 kcmil). For twin lug connectors order as extra: K3442 (350 kcmil). Separate kits are required for both line and load.



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.