


WML

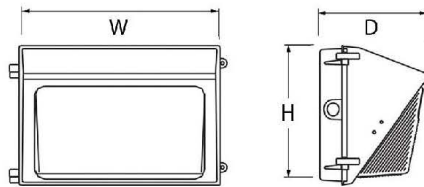

TECHNICAL SPECIFICATIONS:

- :: Die-cast aluminum with powder coat finish (Dark Bronze), optimized for LED
- :: Same footprint as traditional HID wall packs
- :: Prismatic borosilicate glass lens
- :: Four 1/2" hubs: 1 top, 1 on each side, 1 rear
- :: Chip: Philips Lumileds LEDs
- :: CRI: >80
- :: Power Factor: 95%
- :: Operating Temp: -4°F to 104°F
- :: 70,000 hour rated life
- :: 7-year warranty
- :: Suitable for Wet Locations, IP54

APPLICATIONS:

- :: Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- :: Replace existing HID wall packs
- :: Great for use with photocell




LED NON-CUTOFF WALL PACKS

CATALOG NO.	WATTS	LUMENS	COLOR TEMP	REPLACEMENT RANGE	DIMENSIONS
WML-30CW-SM	30W	3300LM	5000K	100~150 MH	8-1/2"(W) x 9"(H) x 7-1/4"(D)
WML-30NW-SM	30W	3240LM	4000K	100~150 MH	
WML-30WW-SM	30W	2400LM	3000K	100~150 MH	
WML-50CW	50W	5400LM	5000K	100~200 MH	13-1/4"(W) x 9-1/2"(H) x 7-1/2"(D)
WML-50NW	50W	5300LM	4000K	100~200 MH	
WML-50WW	50W	3840LM	3000K	100~200 MH	
WML-60CW	60W	6600LM	5000K	175~250 MH	
WML-60NW	60W	6400LM	4000K	175~250 MH	
WML-60WW	60W	4840LM	3000K	175~250 MH	
WML-80CW	80W	9100LM	5000K	250~400 MH	18-1/4"(W) x 9"(H) x 9-1/4"(D)
WML-80NW	80W	9000LM	4000K	250~400 MH	
WML-80WW	80W	7040LM	3000K	250~400 MH	
WML-120CW-LG	120W	12000LM	5000K	250~450 MH	
WML-120NW-LG	120W	12000LM	4000K	250~450 MH	
WML-120WW-LG	120W	12000LM	3000K	250~450 MH	



WML

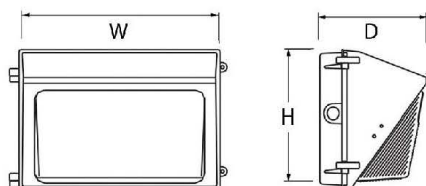

TECHNICAL SPECIFICATIONS:

- :: Die-cast aluminum with powder coat finish (Dark Bronze), optimized for LED
- :: Same footprint as traditional HID wall packs
- :: Prismatic borosilicate glass lens
- :: Four 1/2" hubs: 1 top, 1 on each side, 1 rear
- :: Chip: Philips Lumileds LEDs
- :: CRI: >80
- :: Power Factor: 95%
- :: Operating Temp: -4°F to 104°F
- :: 70,000 hour rated life
- :: 7-year warranty
- :: Suitable for Wet Locations, IP54

APPLICATIONS:

- :: Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- :: Replace existing HID wall packs
- :: Great for use with photocell



LED NON-CUTOFF WALL PACKS

CATALOG NO.	WATTS	LUMENS	COLOR TEMP	REPLACEMENT RANGE	DIMENSIONS
WML-30CW-SM	30W	3300LM	5000K	100~150 MH	8-1/2"(W) x 9"(H) x 7-1/4"(D)
WML-30NW-SM	30W	3240LM	4000K	100~150 MH	
WML-30WW-SM	30W	2400LM	3000K	100~150 MH	
WML-50CW	50W	5400LM	5000K	100~200 MH	13-1/4"(W) x 9-1/2"(H) x 7-1/2"(D)
WML-50NW	50W	5300LM	4000K	100~200 MH	
WML-50WW	50W	3840LM	3000K	100~200 MH	
WML-60CW	60W	6600LM	5000K	175~250 MH	
WML-60NW	60W	6400LM	4000K	175~250 MH	
WML-60WW	60W	4840LM	3000K	175~250 MH	
WML-80CW	80W	9100LM	5000K	250~400 MH	18-1/4"(W) x 9"(H) x 9-1/4"(D)
WML-80NW	80W	9000LM	4000K	250~400 MH	
WML-80WW	80W	7040LM	3000K	250~400 MH	
WML-120CW-LG	120W	12000LM	5000K	250~450 MH	
WML-120NW-LG	120W	12000LM	4000K	250~450 MH	
WML-120WW-LG	120W	12000LM	3000K	250~450 MH	

