

# **FEATURES & SPECIFICATIONS**

INTENDED USE — The IBZ fluorescent high bay is ideal for new construction and renovation projects. It is a one-for-one replacement of common metal halide high bay systems. The unique Cool Running Plus™ technology provides industry-leading, trouble-free operation in ambient temperatures up to 155°F (68°C). Applications include manufacturing, warehousing, commercial and industrial facilities. The IBZ fixture performs well at mounting heights from 15'-40'. Certain airborne contaminants can diminish the integrity of acrylic and/or polycarbonate. Click here for Acrylic-Polycarbonate Compatibility table for suitable uses.

**CONSTRUCTION** — The highly configurable design of the IBZ high bay allows for a multitude of fixture options that can either be factory- or field-installed. The easy-access ballast channel houses the proprietary Cool Running Plus technology, which is the most advanced fluorescent ballast technology available for fluorescent high bay lighting. It has independent lamp operation to reduce lamp maintenance costs, is fast-starting to improve occupancy sensing, and a proprietary thermal-sensing processor that allows for reliable operation in environments where ambient temperatures can reach up to 155°F (68°C).

In addition to the reliable operation of IBZ fixtures, the reflectors tightly control the distribution of light and effectively manage lamp heat to increase the overall efficiency. The result is superior optics in either narrow distribution for aisles, or wide distribution for general lighting. Installation is made quick and easy with IBZ hanging accessories such as the aircraft cable and single-point mounting bracket. IBZ fixtures can be factory-wired to have both sensors and cord sets, further reducing installation time. The configurability, performance and ease of installation make IBZ fixtures the preferred choice for fluorescent high bay lighting.

Channel is formed of heavy-duty code-gauge (22-gauge) steel to stand up to the most demanding elements. Lamp holder assembly protects from incidental damage or movement of sockets during handling and installation. Lamp holders (sockets) are manufactured from PBT (polybutylene terephthalate) material for increased chemical resistance along with secure positioning rotating collars and enclosed contacts. Access plate on the back of the channel housing allows guick and easy wiring.

Finish: Channel is high-gloss white baked enamel; five-stage iron phosphate pretreatment ensures superior paint adhesion and rust resistance.

**OPTICS** — Two optical systems are available. Narrow distribution is ideal for narrow or aisle lighting applications and features precision-formed segmented optics utilizing specular aluminum reflector. Provides 95% reflectivity and warranted for 25 years. Wide distribution includes high-reflectance white finish for general or open areas.

**ELECTRICAL** — Thermally protected, resetting, Class P, HPF, A sound-rated electronic ballast. AWM TFM or THHN wire used throughout rated for required temperatures. Ballast disconnect (BDP) is standard unless EL14 or cord set is requested.

INSTALLATION — Suitable for suspension by chain, cable, surface-mounting bracket, hook monopoint or single (pendant) monopoint. Surface mounting not recommended without optional surface mounting bracket. To maintain high ambient listing, fixture should be mounted at a minimum plenum height of 8".

LISTINGS — CSA Certified to U.S. and Canadian safety standards (UL1598 and CSA 250.0-08) for 55°C and 40°C lensed. Suitable for damp locations.


WARRANTY — 1-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at:


www.acuitybrands.com/support/warranty/terms-and-conditions

**Note:** Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.

# DIMENSIONS

Dimensions may vary with options or accessories.





(70) A = 7/8 (22) Dia knockout

Type FLUORESCENT HIGH BAY FLUORESCENT HIGH BAY

Catalog


Number

Notes



		SPECIFICATION	S	
	Length	Width	Depth	Weight
4-lamp	48-1/16 (1221)	13-1/4 (337)	2-3/8 (60)	16 lbs. (7.3 kg)
6-lamp	48-1/16 (1221)	18-1/8 (460)	2-3/8 (60)	20 lbs (9.1 kg)
8-lamp	48-1/16 (1221)	23-7/8 (606)	2-3/8 (60)	25 lbs. (11.3 kg)

All dimensions are inches (millimeters) unless otherwise specified and may vary with options or accessories.

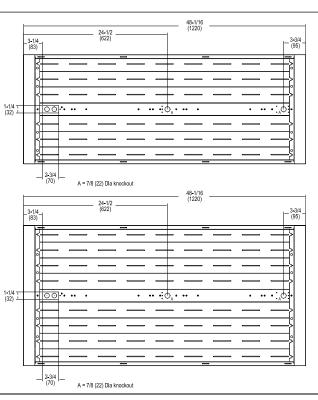

# **IBZ** Fluorescent High Bay, T5H0

ORDERING INI	ORMATION Lead times	s will vary depending on options sel	ected. Consult with your sales represe	entative.		Example: IBZ 454L NDU
IBZ						
Series	Lamp type	Distribution	Shielding‡	Voltage	Ballast configuration	Ballast‡
IBZ For tandem double-length unit, add prefix "T". Ex: TIBZ	Lamps installed         #           454L         4-lamp 54W T5H0           654L         6-lamp 54W T5H0           854L         8-lamp 54W T5H0           Unlamped         -           454         4-lamp 54W T5H0           654         6-lamp 54W T5H0           654         8-lamp 54W T5H0	(blank)       Narrow distribution, ≤5% uplight ‡         NDU       Narrow distribution, enhanced uplight, ≤13% uplight         WD       Wide distribution, ≤5% uplight         WDU       Wide distribution, enhanced uplight, ≤13% uplight	(blank)No shieldingA12125Pattern 12 acrylic, 0.125"‡ACLClear acrylic, 0.125"‡PCL125Clear polycarbonate, 0.125"‡NLWGNo lens; wireguard in door frame ‡	(blank) MVOLT; 120-277V HVOLT 347V- 480V <b>‡</b>	<ul> <li>(blank) Standard configuration</li> <li>4-lamp = (1) 4-lamp ballast</li> <li>6-lamp = (1) 2-lamp and (1) 4-lamp ballast</li> <li>8-lamp = (2) 4-lamp ballasts</li> </ul>	ACRP Cool Running Plus T5 electronic, 1.0 BF, programmed rapid start <b>‡</b> GEB10PS90 T5 electronic, 1.0 BF, programmed rapid start

Lamp color	Options		
(blank)       F54T5H0/841         LP835       F54T5H0/835         LP850       F54T5H0/850         Amalgam lamps ‡         LP841A       F54T5H0/841         LP835A       F54T5H0/835         Energy-saving 49W lamps         P841E49       F54T5H0/841         P835E49       F54T5H0/835         P850E49       F54T5H0/835	GLRInternal fast-blow fuse ‡GMFInternal slow-blow fuse ‡EL14Emergency battery pack ‡EL145DEmergency battery pack w/ self-diagnostics ‡11621250 lumens per lamp battery ‡OUTCTRWiring leads pulled through back center of fixture ‡OCSRELOC® OnePass® 5' installed ‡IMPIntegrated modular plug ‡FSPIntegral full side panelsHBBSICChain hanger (pair)HBBS36ICChain hanger with 36" chain (pair)	Cord sets: ‡CS1WStraight plug, 120VCS3WTwist-lock, 120VCS7WStraight plug, 277VCS11WTwist-lock, 277VCS25WTwist-lock, 347VCS97WTwist-lock, 480VCS93W600 S0 white cord, no plug (no voltage required)Wireguards:WGXExternal wireguard installed on bottom of fixture ‡	Individual sensors: ‡         LCOZU       Aisle motion sensor, pre-wired ‡         LCHOSZU       Aisle motion sensor, pre-wired; programmable dimming ‡         LCPZU       Aisle motion sensor, pre-wired; programmable dimming ‡         LAQZU       360° motion sensor, pre-wired ‡         LANOSZU       360° motion sensor, pre-wired ‡         LAHOSZU       360° motion sensor, pre-wired ‡         LAPZU       360° motion sensor, pre-wired ‡         MSE360       360° motion sensor, embedded, high bay ‡         MSE360LB       360° motion sensor, embedded, low bay ‡         nLight wired:       nPP16D         nKSI       nLight, aisle motion sensor, pre-wired ‡         nMSI360       nLight, 360° motion sensor, pre-wired ‡

ccessories: Order as separate catalog number.						
Mounting:         IBAC120 M100       Aircraft cable 10' with hook (one pair)         IBAC240 M75       Aircraft cable 20' with hook (one pair)         IBHMP       Hook monopoint         IBZACVH       Aircraft 10' V hanger (one pair)         IBZTFC       Tandem coupler and side panel         IBZPMP       Pendant monopoint splice box, includes side covers ‡         IBZPMPHB       Pendant monopoint splice box, includes side covers (3/4" hub) ‡         HBBS36       Chain hanger, 36" (one pair)         IBZSMB       Surface-mounting bracket (one pair)	Field-installable d DLIBZ14 A12125 DLIBZ14 ACL DLIBZ14 PCL125 DLIBZ19 A12125 DLIBZ19 ACL DLIBZ19 PCL125 DLIBZ24 ACL DLIBZ24 PCL125	oor and lens assemblies; ‡ 4-lamp pattern 12 acrylic lens, 0.125" 4-lamp clear acrylic lens 4-lamp clear polycarbonate lens, 0.125" 6-lamp pattern 12 acrylic lens 6-lamp clear acrylic lens 6-lamp clear acrylic lens 8-lamp clear acrylic lens 8-lamp clear acrylic lens 8-lamp clear acrylic lens 8-lamp clear polycarbonate lens, 0.125"	Cord sets and CS1WIMP CS3WIMP CS7WIMP CS1TWIMP CS25WIMP CS97WIMP MSIIMP MSII360IMP	Isensors for IMP option: Straight plug, 120V ‡ Twist-lock, 120V ‡ Straight plug, 277V ‡ Twist-lock, 277V ‡ Twist-lock 347V 600V S0 white cord, no plug (no voltage required) ‡ Twist-lock 480V Aisle sensor ‡ 360° sensor ‡	Wireguard WGIBZ14 WGIBZ19 WGIBZ24	5: Standard 4-lamp wireguard Standard 6-lamp wireguard Standard 8-lamp wireguard

NOTE: **‡** indicates option chosen has ordering restrictions. Please reference ordering restrictions chart.



Page 2 of 4

# **IBZ** Fluorescent High Bay, T5H0

	<b>‡ Option Value Ordering Restrictions</b>
Option value	Ordering restriction
2WGX	One wireguard shipped as separate line item for top installation in field. Not available with IBZPMP.
A12125	For wireguard in door frame, add "WG" to shielding. Ex:A12125WG
ACL	For wireguard in door frame, add "WG" to shielding. Ex:A12125WG
ACRP	Not available with HVOLI.
Amalgam	Not for use with motion sensors.
Ballast	Certain ballast may require a BACKPACK <sup>™</sup> installed by the factory in order to accommodate the size of the battery The BACKPACK <sup>™</sup> is NOT field installable. May only be surface mounted using IBZSMB. Not available with pendant mount using IBZPMP or IBZPMPHB. Not available with IMP.
Cordsets	All cord sets are 18/3, 6' white. Cord sets with plugs are voltage specific. Specify voltage. Other configurations available. Consult factory.
CS1WIMP, CS3WIMP, CS7WIMP, CS11WIMP, CS25WIMP, CS97WIMP	All cord sets are 18/3, 6' white. Cord sets are voltage specific. Specify voltage. Other configurations available. Consult factory.
CS93WIMP	All cord sets are 18/3, 6' white.
EL14, EL14SD	Specify voltage. Consult factory for Canadian applications. Battery options require a BACKPACK™ installed by the factory in order to accommodate the size of the battery. The BACKPACK is NOT field installable. May only be surface mounted using IBZSMB. Not available with pendant mount using IBZPMP or IBZ PMPHB. Not available with IMP. Certified to UL1598 (approx. 1100 lumens at 25°C when using 49W lamps, and 911 lumens at 45°C), Single-lamp operation only. 120 or 277 voltage only.
Field installable door and lens assemblies	Not available with battery pack options. Not available with MSE360 or MSE360LB options.
GLR	Specify voltage. Consult factory for Canadian applications. Not available with 347 voltage
GMF	Specify voltage. Consult factory for Canadian applications. Not available with 347 voltage
HVOLT	Nonstandard configurations may require factory installed BACKPACK™. Consult factory.
1162	Battery options require a BACKPACK <sup>™</sup> installed by the factory in order to accommodate the size of the battery. The BACKPACK is NOT field installable. May only be surface mounted using IBZSMB. Not available with pendant mount using IBZPMP or IBZ PMPHB. Not available with IMP. Certified to UL1598 (approx. 1100 lumens at 25°C when using 49W lamps, and 911 lumens at 45°C), Single-lamp operation only. 120 or 277 voltage only. Max 2500 lumens when used with 54WT5 lamps up to 55°C ambient temperature (120 or 277 voltage only).
IBZPMPHB	When ordering IBZPMP, two-ballasts configurations are recommended. Ex: 2/2. Not available with tandem units.
IMP	Must be factory -installed. Not available on TIBZ 16-lamp configurations. Must have "IMP" power cord to power fixture.
Individual sensors	Specify voltage. Other configurations available, see page four for additional options.
Lamps installed	Lamps installed are F54T5H0/841 unless otherwise specified.
MSIIMP, MSI360IMP	Specify voltage. Consult factory for Canadian applications. Must have "IMP" power cord to power fixture.
Narrow distribution (Blank)	Available with 6-lamp configurations only.
nMSI	nMSI option utilizes nPP16 and a nCMB 50, CAT5e cable also include. Available 120 or 277V only.
nMSI360	nMSI360 option utilizes a nPP16 and a nCMB 6, CAT5e cable also included. Available 120 or 277V only.
nPP16D	nPP16D options utilizes nPP16 and a nIO D KO device, CATSe connector cable also included. Available 120 or 277V only.
OCS	Specify voltage. Consult factory for Canadian applications.
OUTCTR	Not available with MSE360 option.
PCL125	For wireguard in door frame, add "WG" to shielding. Ex:A12125WG
Shielding	5/55°F warranty with open fixtures only. Not available with MSE360 option.

## LSXR - Fixture Mount Sensor (see <u>www.sensorswitch.com</u> for additional information)

- Four interchangeable lenses.
- Integrated mounting bracket drops lens down 3" from chase nipple.
- Single or dual relay versions designed with robust protection from the harsh switching requirements of T5 and LED loads.
- Photocell and 0-10VDC dimming options.
- No PIR field calibration or sensitivity adjustments required.

LSXR configuration	Comparable CMRB sensor	Old style sensor nomenclature
For shortes	t lead times use one of the follo	owing LSXR configurations
LCOZU	CMRB 50	MSI
LCHOSZU	CMRB 50 D	MSID
LCPZU	CMRB 50 P	MSIPED
LAOZU	CMRB 6	MSI360
LAHOSZU	CMRB 6 D	MSI360D
LAPZU	CMRB 6 P	MSI360PED



# SELECTIONS BELOW WILL EXTEND ORDER LEAD TIME. CONSULT YOUR SALES REPRESENTATIVE FOR DETAILS.

## SINGLE RELAY

ORDERING INFORMATION Lead times will vary depending on options selected. Consult with your sales representative.

## Example: LAH0SZU

Series	Lens option	Dimming/Photocell	Max. dim Level	Min. dim level	Temp/Humidity	Default time delay
L LSXR passive infrared indoor occupancy sensor	A High mount, 360° B Low mount, 360° C High mount aisleway	<ul> <li>None<sup>1</sup></li> <li>High/low occupancy operation</li> <li>Switching photocell(on/off)</li> <li>Dimming and switching photocell</li> <li>Dimming and switching photocell with high/low occupancy operation</li> </ul>	0 10 VDC 9 9 VDC 8 8 VDC 7 7 VDC	<ul> <li>S Minimum dimming level of ballast</li> <li>1 VDC</li> <li>2 VDC</li> <li>3 VDC</li> <li>4 VDC</li> <li>5 VDC</li> <li>6 VDC</li> </ul>	Z None T Low temperature	<ul> <li>I 30 seconds</li> <li>D 2.5 minutes</li> <li>X 5 minutes</li> <li>R 7.5 minutes</li> <li>U 10 minutes (with minimum 15 minutes on time)</li> <li>V 15 minutes</li> <li>W 20 minutes</li> <li>Y 30 minutes</li> </ul>

## DUAL RELAY (Available with 120, 277, and 347V only)

Series	Lens option	Poles	Operating mode	Temp/Humidity	Default time delay
L LSXR passive infrared indoor occupancy sensor	A High mount, 360° B Low mount, 360° C High mount aisleway	2 Dual relay	J       None         K       Alternating off relays (promotes even lamp wear)         O       Alternating off relays w/photocell         P       Switching photocell(on/off)         E       Photocell on/off (pole 1 only)	Z None T Low temperature	I 30 seconds D 2.5 minutes X 5 minutes R 7.5 minutes U 10 minutes (with minimu
			F Photocell on/off - both poles (dual set-point)		15 minutes on time) V 15 minutes
					W 20 minutes
					Y 30 minutes

	Ex	ample: LENS 50 J100
Replacement lense	es: Order as separate catalog num	ber.
<u>Series</u> Lens	<u>Lens type</u> 6 High mount 360°	<u>Package quantity</u> U Unit
	<ol> <li>Low mount 360°</li> <li>High mount aisleway</li> </ol>	J10 10-pack J100 100-pack

🜔 LITHONIA LIGHTING

# **OPTIONS AND ACCESSORIES**

The I-BEAM fixture offers numerous options for almost every electrical and optical component, including a long list of field-installable accessories.



#### INTEGRATED MODULAR PLUG (IMP)

Must be factory-installed and allows for field installation of various modular accessories including cordsets, motion sensors, photocells and LC&D XPoint<sup>™</sup> relays. Requires IMP cordset for operation.

Order as: IMP



#### IBZ BACKPACK™

Electrical box must be factory-installed to house additional components such as emergency ballasts, step-down transformers and dimming ballasts. Extended brackets allow air flow for increased heat management of all components.

Factory-installed.



### V-SHAPED WIRE GUARD (external)

Flex on impact to absorb shock, reducing damage to the fixture assemblies. Wire guards can be mounted on top and bottom of fixtures to provide full protection.

Factory-installed option:

WGX 2WGX

Field-installed option: WGIBZ14 WGIBZ19 WGIBZ24



### TANDEM CAPABILITY

Supports applications requiring high luminance and high mounting heights. The 8' tandem option is factory-assembled with continuous steel side panels and tensioning couplers. Tandem kits are also available for field installation.

Factory-installed option: TIBZ

Field-installed option: IBZTFC

#### PENDANT MONOPOINT BRACKET

Accepts  $\frac{34''}{2}$  rigid conduit for single-point mounting. The bracket can be adjusted to help counterbalance fixture to off set weight variance from end to end.

Order as: IBZPMP IBZPMPHB



🚺 LITHONIA LIGHTING