




T5 LED LAMP

DESCRIPTION

25W T5 LED | 5000K | >80 CRI | High Efficiency | Dedicated 277V Input



PRODUCT FEATURES

- Listed on DLC QPL
- Replacement for Conventional Fluorescent Lamp
- 50,000+ Hour Lifetime
- Environmentally Friendly: No Mercury Used
- Instant Startup
- Direct Replacement for F54T5/HO Fluorencent Lamp
- Frosted Lens Eliminates Pixelation











- UL Classified
- Operating Temperature: -20°C/-4°F to 45°C/113°F
- Integral Driver (Isolated), Eliminates the Need for External Driver or Ballast
- 120+ Lumens per Watt
- Improved Lamp Durability with Shatterproof Coated Glass
- ETL Sanitation Listed NSF/ANSI Standard 2 Food Equipment

OPERATING SPECIFICATIONS

ELECTRICAL CHARACTERISTICS

Input Voltage	Power Consumption	Power Factor	Input Current
277Vac	25W	>0.9	0.09A @ 277V


RATED LIFE

L70 (Hours)	50,000


PHOTOMETRIC CHARACTERISTICS

5000K
3400 lm
>80
136 lm/W
240°
325°

SPECTRAL DISTRIBUTION



POLAR CANDELA DISTRIBUTION



Located at Horizontal Angle = 0, Vertical Angle 0

- 1. Violet Vertical Plane through Horizontal Angles (90-270)
- 2. Green Vertical Plane through Horizontal Angles (0-180)

Keystone Technologies • 1390 Welsh Road, North Wales, PA 19454 • Phone (800) 464-2680 • Fax (888) 966-0556 • www.keystonetech.com







T5 LED LAMP

WIRING DIAGRAMS


1. Cut all existing connections to ballast as shown below and remove ballast.

Typical Ballast Configurations:





2. Re-wire fixture as shown below.

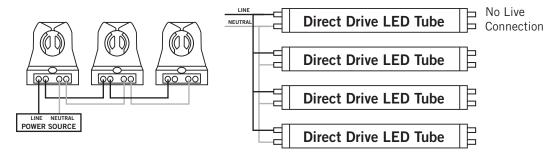

Typical Non-Shunted Lampholder



Connect wires directly to these terminals


CAUTION: Use only non-shunted lampholders.

Do not install product in a fixture with shunted lampholders (found in all fixtures using instant start ballasts). If the current lampholders are shunted, remove them and replace them with non-shunted lampholders. Make new connections directly to terminals as indicated above.

Keystone can provide any style replacement lampholders. Call us at 800-464-2680.

PHYSICAL CHARACTERISTICS

LAMP DIMENSIONS




A (Illuminated Length)	41.38"	
B (Body Length)	45.19"	
C (Diameter)*	0.82"	

NOMINAL LENGTH: 48" BASE TYPE: G5 (Miniature Bi-Pin)

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KT-LED25T5HO-48GC-850-D-CP	Carton Pack (Egg Crate Packaging)	25	Quick Ship

CATALOG NUMBER BREAKDOWN



^{*}Though nominally referred to as a T5, this lamp has a T6 diameter






T5 LED LAMP

DESCRIPTION

25W T5 LED | 5000K | >80 CRI | High Efficiency | Dedicated 277V Input



PRODUCT FEATURES

- Listed on DLC QPL
- Replacement for Conventional Fluorescent Lamp
- 50,000+ Hour Lifetime
- Environmentally Friendly: No Mercury Used
- Instant Startup
- Direct Replacement for F54T5/HO Fluorencent Lamp
- Frosted Lens Eliminates Pixelation











- UL Classified
- Operating Temperature: -20°C/-4°F to 45°C/113°F
- Integral Driver (Isolated), Eliminates the Need for External Driver or Ballast
- 120+ Lumens per Watt
- Improved Lamp Durability with Shatterproof Coated Glass
- ETL Sanitation Listed NSF/ANSI Standard 2 Food Equipment

OPERATING SPECIFICATIONS

ELECTRICAL CHARACTERISTICS

Input Voltage	Power Consumption	Power Factor	Input Current
277Vac	25W	>0.9	0.09A @ 277V


RATED LIFE

L70 (Hours)	50,000


PHOTOMETRIC CHARACTERISTICS

5000K
3400 lm
>80
136 lm/W
240°
325°

SPECTRAL DISTRIBUTION



POLAR CANDELA DISTRIBUTION



Located at Horizontal Angle = 0, Vertical Angle 0

- 1. Violet Vertical Plane through Horizontal Angles (90-270)
- 2. Green Vertical Plane through Horizontal Angles (0-180)

Keystone Technologies • 1390 Welsh Road, North Wales, PA 19454 • Phone (800) 464-2680 • Fax (888) 966-0556 • www.keystonetech.com







T5 LED LAMP

WIRING DIAGRAMS


1. Cut all existing connections to ballast as shown below and remove ballast.

Typical Ballast Configurations:





2. Re-wire fixture as shown below.

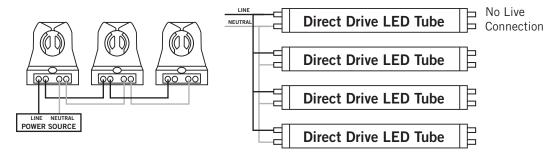

Typical Non-Shunted Lampholder



Connect wires directly to these terminals


CAUTION: Use only non-shunted lampholders.

Do not install product in a fixture with shunted lampholders (found in all fixtures using instant start ballasts). If the current lampholders are shunted, remove them and replace them with non-shunted lampholders. Make new connections directly to terminals as indicated above.

Keystone can provide any style replacement lampholders. Call us at 800-464-2680.

PHYSICAL CHARACTERISTICS

LAMP DIMENSIONS




A (Illuminated Length)	41.38"	
B (Body Length)	45.19"	
C (Diameter)*	0.82"	

NOMINAL LENGTH: 48" BASE TYPE: G5 (Miniature Bi-Pin)

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KT-LED25T5HO-48GC-850-D-CP	Carton Pack (Egg Crate Packaging)	25	Quick Ship

CATALOG NUMBER BREAKDOWN



^{*}Though nominally referred to as a T5, this lamp has a T6 diameter