



ELLIOTT ELECTRIC SUPPLY

We Deliver...Lower Cost, Quality Products, & Personal Service

3804 South Street
75964-7263, TX Nacogdoches
Phone: 936-569-7941
Fax: 936-560-4685



71A7971001D 70W HPS Ballast M-Tap

Advance By Signify

Catalog Number	71A7971001D
Manufacturer	Advance By Signify
Description	Magnetic Hid Kit, Magnetic Hid Ballast, Pulse, 70 W, 120/208/240/277 V Ac, 1.46 A;0.86 A;0.73 A;0.64 A, Non Dimmable, 1 Lamps, 3.9 In Length, 2.9 In Width, 2.8 In Height, 1 Ballast Factor, 0.90 Power Factor, 60 HZ, +90 °C (Capacitor) Operating Temperature, 2.527 KG
Weight per unit	5.6 (lbs/each)
Product Category	Hid Ballast Kits

Features

ANSI Code	S62
dimnable	No
Lamp Type	HPS
Power Rating	70 Watt
Wattage	70 Watt

Dimensions and Weight

Width	2.9 In
-------	--------

Descriptions

Description	70W HPS BALLAST M-TAP
-------------	-----------------------

Manufacturer Information


Brand	Signify Electronics
GTIN	00781087797112
UPC	781087797112

Taxonomies, Classifications, and Categories

Category Description	HID BALLASTS
Type	Magnetic HID

Packaging

Carton	1
Weight Per each	5.59

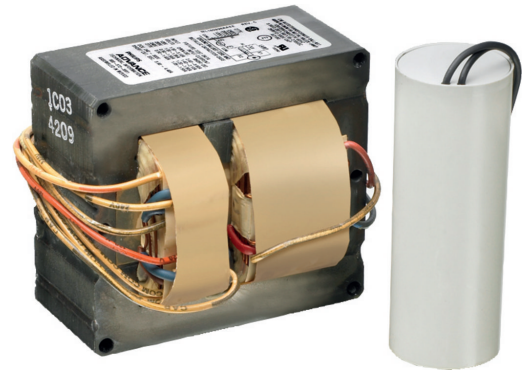

Core & Coil (71A) HPS ~LT~ 200W

CORE & COIL HID 71A7971001D

The basic ballast is the open core and coil which is most often used as a component within a lighting luminaire. The core and coil also forms the nucleus of Philips Advance's five other ballast configurations.

Product data

General Information		Input Frequency	
ANSI Code	S62	Input Frequency	60 Hz
Lamp Type	70W HPS	Input Current (Open Circuit)	1.46/0.86/0.73/0.64 A
Number of Lamps	1 piece/unit	Input Current (Starting)	0.85/0.51/0.43/0.39 A
Circuit Type	HX-HPF	Input Current (Short Circuit)	0.6-0.95/0.35-0.6/0.3-0.5/0.25-0.4 A
Ballast Type	Magnetic HID	Secondary Short Circuit Current	2.1-2.45 A
Base Model	71A7971	Constant Wattage Deviation	Within Trapezoid
Core Size	3 X 4 (2 LW)	Ballast Factor (Nom)	1
Suitable For Outdoor Use	Yes	Power Factor (Nom)	0.90
Ignitor Catalog Number	LI551-H4	Open Circuit Voltage	120 V
Ignitor Temperature Rating	105°C	Input Current (Nom)	0.81/0.47/0.4/0.35 A A
Capacitor Value	7 MFD	Input Power (Nom)	96 W
Capacitor Catalog Number	7C070L30RA	Rated Lamp Power	70 W
Capacitor Requirements	280V	Wiring	
Capacitor Temperature Rating	105°C	Wire Striplength	0.5 mm
Capacitor Diameter/Oval Dimensions	1.25 in	Wire Length by Color	12"
Capacitor Height	2.75 in	Wire Type	Stranded
Automatic Restart	No	Remote Wiring Configuration Allowed	Yes
Operating and Electrical		Max Ballast-Lamp Distance Remote Wiring	2'
Input Voltage	120/208/240/277 V	Recommended Fuse Value	5/3/2/2 A

Core & Coil (71A) HPS ~LT~ 200W


Approval and Application

Open Circuit Voltage Test (Volts)	110-130 V
Approval Marks	ULR CSA certificate RoHS Compliant
Temperature Marking	B/C/B/C
UL Recognized	Yes
Hipot Test (1 Minute)	2000 V
Hipot Test (2 Seconds)	2500 V
UL Insulation Class	H(180°C)
UL Temperature Code	1029C

Product Data

Order product name	CORE & COIL HID 71A7971001D
EAN/UPC - Product	781087797112
Order code	913700501309
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	913700501309
Net Weight (Piece)	2.527 kg

Dimensional drawing

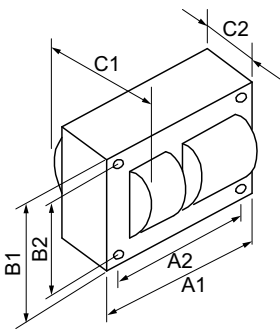

HPS BAL 70W S62 QUAD KIT

Product	C1	C2	A1	A2	B1	B2
CORE & COIL HID 71A7971001D	2.9 in	1.52 in	3.9 in	3.5 in	2.8 in	2.4 in

