



# **HALO® Canless Direct Mounts**

# **HLB** downlights

HLB3 page 8

3-inch round and square

# **HLA** adjustables

HLA3 page 32

3-inch round and square



# HLB4 page 12

4-inch round and square



4-inch round and square



# HLB6 page 20

6-inch round and square

# HLB8 page 26

8-inch round


# HLB12 page 30

12-inch round



# **HALO® HLB**



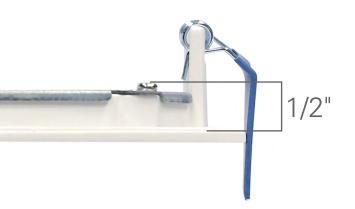


# ultra-thin

The HLB is an ultra-thin LED lens downlight with a remote driver / junction box ideal for new construction and renovation work.

Simplified installation in drywall or suspended ceilings eliminates recessed cans saving time and money. The HLB can install from below the ceiling in as little as a 1-1/2" plenum height and can be used in direct contact with insulation and is airtight.

Distribution patterns work well in low to medium ceiling heights, applications are virtually universal including living and dining areas, bedrooms, closets, hallways, bathrooms, kitchens, basements, soffits, entryways and porches.

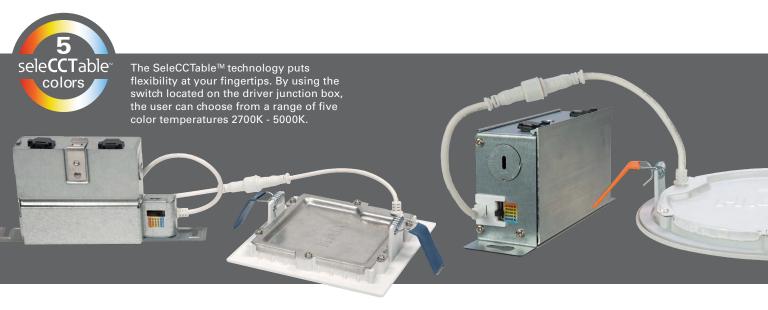

# installs virtually anywhere

The HLB installs into a standard hole saw size cutout and is retained securely in place with springs.

The driver junction box installs through a cutout and can be positioned remotely from the fixture fitting. Mounting holes facilitate attachment to the building structure.











# New Construction Mounting Frame

The new construction mounting frame locates the fixture fitting during electrical rough-in. HALO's patented Got Nail!® bar hangers are pre-installed supporting the mounting frame along rails.

During electrical rough-in, the driver / junction box attaches to the mounting frame with captive fasteners meeting code requirements for attachment to the building structure.

See page 37 for more info.



**HL4RSMF** = 4" round and square mounting frame **HL6RSMF** = 6" round and square mounting frame **HL8RSMF** = 8" round and square mounting frame

# **Square Installation**











- · Up to 550 lumens
- Use to replace 40W A19 incandescent lamp
- 2700K, 3000K, 3500K, 4000K, 5000K CCT field select
- 2700K, 3000K, 3500K, 4000K fixed CCT
- 90 CRI
- 9W, 120V
- L70 @ 50,000 hrs
- · HALO matte white finish
- No existing recessed housing or junction box required

IECC

- Fixture will not fit into existing housings or junction boxes
- Wet location listed (shower rated) covered ceiling
- Rated for direct contact to air permeable insulation
- AIR-TITE™ certified per ASTM-E283
- Textured lens provides smooth light distribution
- · Five-year limited warranty










Refer to ENERGY STAR® Certified Products List. Can be used to comply with California Title 24 High Efficacy requirements. Certified to California Appliance Efficiency Database under JA8.

ncy Standards



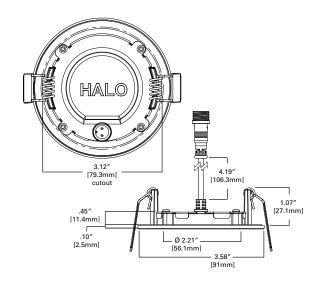

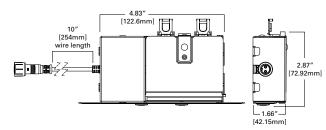



## Ordering Information

### SAMPLE NUMBER: HLB3059301EMWR

Models	Lumens	CRI / CCT	Driver	Finish	Packaging
HLB3 = 3-Inch LED lens downlight with remote driver / junction box	05 = 500 lumen (nominal)	927 = 90 CRI minimum, 2700K CCT 930 = 90 CRI minimum, 3000K CCT 935 = 90 CRI minimum, 3500K CCT 940 = 90 CRI minimum, 4000K CCT 9FS = 90 CRI minimum, field selectable 2700K, 3000K, 3500K, 4000K or 5000K CCT	<b>1E</b> = 120V 60Hz, LE & TE phase cut 5% dimming	MW = matte white flange	R = recyclable 4-color unit carton suitable for point of purchase merchandizing display

### Accessories

### Oversized Trim Ring

HLB3ROTMW = 3" round oversized trim, matte white

**Decorative Trim Ring** 

HLB3RTRMMW = 3" round decorative overlay, matte white

 $\textbf{HLB3RTRMSN} = 3" \ \text{round decorative overlay, satin nickel}$ 

HLB3RTRMTBZ = 3" round decorative overlay, tuscan bronze



A Savings are over the life of the HALO HLB3 luminaire.

Savings are over the Energy savings: \$190

Replacement lamp savings: \$50

Savings based on \$0.128 per kilowatt hour, average six hours use per day, 50,000 hours of lamp usage, and 60W A19 lamp lumen equivalent.

### Extension Cable | Dedicated Driver/Jbox

HLB06EC - 6 ft. extension cable HLB12EC - 12 ft. extension cable HLB20EC - 20 ft. extension cable

### Extension Cable | SeleCCTable Driver/

<u>Jbox</u>

HLB06FSEC - 6 ft. extension cable HLB12FSEC - 12 ft. extension cable

HLB12FSEC - 12 ft. extension cable	
HLB20FSEC - 20 ft. extension cable	

Energy Data			
Lumens	500 Series		
Input Voltage	120V		
Input Current	100 (mA)		
Input Power	9.0 (W)		
Efficiency	60 (LPW)		
Inrush (A)	2.2 A @ 42mS		
THD	≤ 20%		
PF	≥ 0.90		
T Ambient	-30° - +40°C		
Sound Rating	≤ 22dba		



- · Up to 550 lumens
- Use to replace 40W A19 incandescent lamp
- 2700K, 3000K, 3500K, 4000K, 5000K CCT field select
- 2700K, 3000K, 3500K, 4000K fixed CCT
- 90 CRI
- 9W, 120V
- · L70 @ 50,000 hrs
- · HALO matte white finish
- No existing recessed housing or junction box required

- Fixture will not fit into existing housings or junction boxes
- Wet location listed (shower rated) covered ceiling
- Rated for direct contact to air permeable insulation
- AIR-TITE™ certified per ASTM-E283
- Textured lens provides smooth light distribution
- · Five-year limited warranty










Refer to ENERGY STAR® Certified Products List. Can be used to comply with California Title 24 High Efficacy requirements. Certified to California Appliance Efficiency Database under JA8.



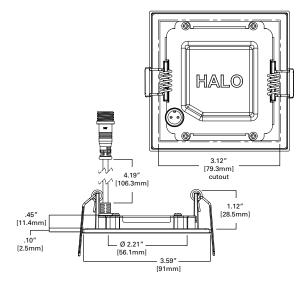

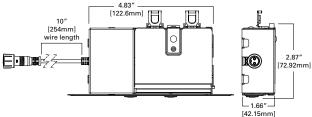



### **Ordering Information**

### SAMPLE NUMBER: HLB3S059301EMWR

Models	Lumens	CRI / CCT	Driver	Finish	Packaging
HLB3S = 3-Inch LED square lens downlight with remote driver / junction box	<b>05</b> = 500 lumen (nominal)	927 = 90 CRI minimum, 2700K CCT 930 = 90 CRI minimum, 3000K CCT 935 = 90 CRI minimum, 3500K CCT 940 = 90 CRI minimum, 4000K CCT 9FS = 90 CRI minimum, field selectable 2700K, 3000K, 3500K, 4000K or 5000K CCT	<b>1E</b> = 120V 60Hz, LE & TE phase cut 5% dimming	MW = matte white flange	R = recyclable 4-color unit carton suitable for point of purchase merchandizing display

### Accessories

**Oversized Trim Ring** 

HLB3SOTMW = 3" square oversized trim, matte white

**Decorative Trim Ring** 

HLB3STRMMW = 3" square decorative overlay, matte white

**HLB3STRMSN** = 3" square decorative overlay, satin nickel

HLB3STRMTBZ = 3" square decorative overlay, tuscan bronze



<sup>a</sup> Savings are over the life of the HALO HLB3S luminaire.

Energy savings: \$190

Replacement lamp savings: \$50

Savings based on \$0.128 per kilowatt hour, average six hours use per day, 50,000 hours of lamp usage, and 60W A19 lamp lumen equivalent.

### Extension Cable | Dedicated Driver/Jbox

HLB06EC - 6 ft. extension cable HLB12EC - 12 ft. extension cable HLB20EC - 20 ft. extension cable

# Extension Cable | SeleCCTable Driver/

<u>Jbox</u>

HLB0FSEC - 6 ft. extension cable HLB12FSEC - 12 ft. extension cable HLB20FSEC - 20 ft. extension cable

Input Voltage	120V
Input Current	100 (mA)
Input Power	9.0 (W)
Efficiency	60 (LPW)
Inrush (A)	2.2 A @ 42mS
THD	≤ 20%
PF	≥ 0.90
T Ambient	-30° - +40°C
Sound Rating	≤ 22dba

**Energy Data** 


Lumens


500 Series





- Up to 750 lumens
- Use to replace 60W A19 incandescent lamp
- 2700K, 3000K, 3500K, 4000K, 5000K CCT field select
- 3000K, 4000K fixed CCT
- 90 CRI
- 12W, 120V or 11W, 120V-277V UNV
- L70 @ 50,000 hrs
- HALO matte white finish
- No existing recessed housing or junction box required

- Fixture will not fit into existing housings or junction boxes
- Wet location listed (shower rated) covered ceiling
- Rated for direct contact to air permeable insulation
- AIR-TITE™ certified per ASTM-E283
- Textured lens provides smooth light distribution
- · Five-year limited warranty

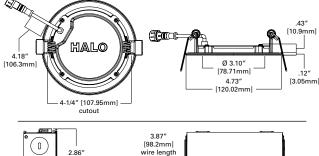





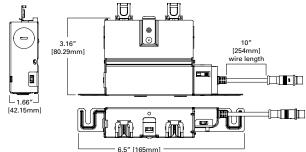













Refer to ENERGY STAR® Certified Products List. Can be used to comply with California Title 24 High Efficacy requirements. Certified to California Appliance Efficiency Database under JA8.



### Ordering Information

#### SAMPLE NUMBER: HI BANGGESTEMWAR

SAIVIPLE NUMBER: FILBHUOSPS TEINIVIN					
Models	Lumens	CRI / CCT	Driver	Finish	Packaging
HLB4 = 4-Inch ultra-thin LED lens downlight with remote driver / junction box	<b>06</b> = 600 lumen (nominal)	930 = 90 CRI minimum, 3000K CCT 940 = 90 CRI minimum, 4000K CCT 9FS = 90 CRI minimum, field selectable 2700K, 3000K, 3500K, 4000K or 5000K CCT	<b>1E</b> = 120V 60Hz, LE & TE phase cut 5% dimming <b>E010</b> = 120V-277V; 0-10V dim to 5%	<b>MW</b> = matte white flange	R = recyclable 4-color unit carton suitable for point of purchase merchandizing display

#### Accessories

### **Oversized Trim Ring**

HLB4ROTMW = 4" round oversized trim, matte white

## **Decorative Trim Ring**

HLB4RTRMMW =  $4^{\prime\prime\prime}$  round decorative overlay, matte white HLB4RTRMSN =  $4^{\prime\prime\prime}$  round decorative overlay, satin nickel HLB4RTRMTBZ =  $4^{\prime\prime\prime}$  round decorative overlay, tuscan bronze

### **Mounting Frame**

HL4RSMF = 4" round and square mounting frame

### Extension Cable | Dedicated Driver/Jbox

HLB06EC - 6 ft. extension cable HLB12EC - 12 ft. extension cable HLB20EC - 20 ft. extension cable

# Extension Cable | SeleCCTable Driver/

HLB06FSEC - 6 ft. extension cable HLB12FSEC - 12 ft. extension cable HLB20FSEC - 20 ft. extension cable

Lileig	y Data
Lumens	600 Series
Input Voltage	120V
Input Current	100 (mA)
Input Power	12.0 (W)
Efficiency	60 (LPW)
Inrush (A)	2.2 A @ 42mS
THD	≤ 20%
PF	≥ 0.90
T Ambient	-30° - +40°C
Sound Rating	≤ 22dba



<sup>a</sup> Savings are over the life of the HALO HLB4 luminaire

Energy savings: \$327

Replacement lamp savings: \$50

Savings based on \$0.128 per kilowatt hour, average six hours use per day, 50.000 hours of lamp usage, and 60W A19 lamp lumen equivalent.


12 halolighting.com halolighting.com 13






- Use to replace 60W A19 incandescent lamp
- 2700K, 3000K, 3500K, 4000K, 5000K CCT field select
- 90 CRI
- 12W, 120V
- L70 @ 50,000 hrs
- · HALO matte white finish
- · No existing recessed housing or junction box required

- · Fixture will not fit into existing housings or junction boxes
- · Wet location listed (shower rated) covered ceiling
- · Rated for direct contact to air permeable insulation
- AIR-TITE™ certified per ASTM-E283
- · Round polymer trim and smooth lens
- · Five-year limited warranty



[120.02mm]



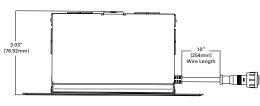

















# **Ordering Information**

### SAMPLE NUMBER: HLB4069FS1EMWR

Models	Lumens	CRI / CCT	Driver	Finish	Packaging
HLBPH4 = 4-Inch LED smooth lens downlight with plastic housing and remote driver / junction box	<b>06</b> = 600 lumen (nominal)	<b>9FS</b> = 90 CRI minimum, field selectable 2700K, 3000K, 3500K, 4000K or 5000K CCT	<b>1E</b> = 120V 60Hz, LE &TE phase cut 5% dimming	<b>MW</b> = matte white flange	R = recyclable 4-color unit carton suitable for point of purchase merchandizing display

### Accessories

### Oversized Trim Ring

HLB4ROTMW = 4" round oversized trim, matte white

# Decorative Trim Ring

HLB4RTRMMW = 4" round decorative overlay, matte white **HLB4RTRMSN** = 4" round decorative overlay, satin nickel **HLB4RTRMTBZ** = 4" round decorative overlay, tuscan bronze

### **Mounting Frame**

HL4RSMF = 4" round and square mounting frame

# Extension Cable | SeleCCTable Driver/

Jbox HLB06FSEC - 6 ft. extension cable HLB12FSEC - 12 ft. extension cable HLB20FSEC - 20 ft. extension cable


Lumens	600 Series
Input Voltage	120V
Input Current	0.083 (A)
Input Power	10.0 (W)
Efficiency	80.5 (LPW)
Inrush (A)	0.95 A @ 102 μS
THD	≤ 11.1%
PF	≥ 0.98
T Ambient	-30° - +40°C
Sound Rating	≤ 22dba

**Energy Data** 




- <sup>a</sup> Savings are over the life of the HALO HLBPH4 luminaire.
- Energy savings: \$327
- Replacement lamp savings: \$50

Savings based on \$0.128 per kilowatt hour, average six hours use per day, 50,000 hours of lamp usage, and 60W A19 lamp lumen equivalent

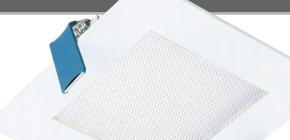







- Use to replace 60W A19 incandescent lamp
- 2700K, 3000K, 3500K, 4000K, 5000K CCT field select
- 3000K, 4000K fixed CCT
- 90 CRI
- · 12W, 120V or 11W, 120V-277V
- UNV
- L70 @ 50,000 hrs
- · HALO matte white finish

- · No existing recessed housing or junction box required
- · Fixture will not fit into existing housings or junction boxes
- · Wet location listed (shower rated) covered ceiling
- · Rated for direct contact to air permeable insulation
- AIR-TITE™ certified per ASTM-E283
- · Textured lens provides smooth light distribution
- · Five-year limited warranty

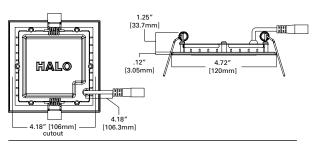

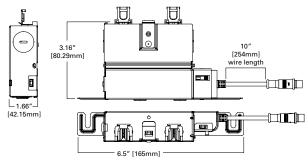















# Ordering Information

### SAMPLE NUMBER: HLB4S069FS1EMWR

Refer to ENERGY STAR® Certified Products List. Can be used to comply with California Title 24 High Efficacy requirements.

Models	Lumens	CRI / CCT	Driver	Finish	Packaging
HLB4S = 4-Inch LED square lens downlight with remote driver / junction box	<b>06</b> = 600 lumen (nominal)	930 = 90 CRI minimum, 3000K CCT 940 = 90 CRI minimum, 4000K CCT 9FS = 90 CRI minimum, field selectable 2700K, 3000K, 3500K, 4000K or 5000K CCT	<b>1E</b> = 120V 60Hz, LE & TE phase cut 5% dimming <b>E010</b> = 120V-277V; 0-10V dim to 5%	MW = matte white flange	R = recyclable 4-color unit carton suitable for point of purchase merchandizing display

#### Accessories

### **Oversized Trim Ring**

HLB4SOTMW = 4" square oversized trim, matte white

## **Decorative Trim Ring**

HLB4STRMMW = 4" square decorative overlay, matte white HLB4STRMSN = 4" square decorative overlay, satin nickel HLB4STRMTBZ = 4" square decorative overlay, tuscan bronze

### **Mounting Frame**

HL4RSMF = 4" round and square mounting frame

### Extension Cable | Dedicated Driver/Jbox

HLB06EC - 6 ft. extension cable HLB12EC - 12 ft. extension cable HLB20EC - 20 ft. extension cable

# Extension Cable | SeleCCTable Driver/

HLB06FSEC - 6 ft. extension cable HLB12FSEC - 12 ft. extension cable HLB20FSEC - 20 ft. extension cable

20774
5
SAVINGS
CAVIIIGO

<sup>a</sup> Savings are over the life of the HALO HLB4S luminaire.


Energy savings: \$327

Replacement lamp savings: \$50

Savings based on \$0.128 per kilowatt hour, average six hours use per day, 50,000 hours of lamp usage, and 60W A19 lamp lumen equivalent

Lifely	y Data
Lumens	600 Series
Input Voltage	120V
Input Current	90 (mA)
Input Power	10.5 (VV)
Efficiency	60 (LPW)
Inrush (A)	2.2 A @ 54mS
THD	≤ 20%
PF	≥ 0.90
T Ambient	-30° - +40°C
Sound Rating	≤ 22dba









Square downlight with a round ceiling cutout




- · Up to 750 lumens
- Use to replace 60W A19 incandescent lamp
- 2700K, 3000K, 3500K, 4000K, 5000K CCT field select
- 3000K, 4000K fixed CCT
- 90 CRI
- 12W, 120V
- L70 @ 50,000 hrs
- · HALO matte white finish
- No existing recessed housing or junction box required

- Fixture will not fit into existing housings or junction boxes
- Wet location listed (shower rated) covered ceiling
- Rated for direct contact to air permeable insulation
- AIR-TITE™ certified per ASTM-E283
- Textured lens provides smooth light distribution
- · Five-year limited warranty





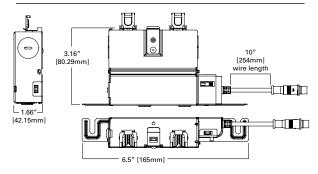













Refer to ENERGY STAR® Certified Products List. Can be used to comply with California Title 24 High Efficacy requirements. Certified to California Appliance Efficiency Database under JA8.



### Ordering Information

### SAMPLE NUMBER: HLB4S069FS1EMWR

Models	Lumens	CRI / CCT	Driver	Finish	Packaging
HLB4SP = 4-Inch LED Square lens round ceiling cutout downlight with remote driver / junction box	<b>06</b> = 600 lumen (nominal)	930 = 90 CRI minimum, 3000K CCT 940 = 90 CRI minimum, 4000K CCT 9FS = 90 CRI minimum, field selectable 2700K, 3000K, 3500K, 4000K or 5000K CCT	<b>1E</b> = 120V 60Hz, LE &TE phase cut 5% dimming	MW = matte white flange	R = recyclable 4-color unit carton suitable for point of purchase merchandizing display

### Accessories

### **Oversized Trim Ring**

HLB4SOTMW = 4" square oversized trim, matte white

### **Decorative Trim Ring**

HLB4SPTRMMW = 4" square pin decorative overlay, matte white HLB4SPTRMSN = 4" square pin decorative overlay, satin nickel HLB4SPTRMTBZ = 4" square pin decorative overlay, tuscan bronze

### **Mounting Frame**

**HL4RSMF** = 4" round and square mounting frame

### Extension Cable | Dedicated Driver/Jbox

HLB06EC - 6 ft. extension cable HLB12EC - 12 ft. extension cable HLB20EC - 20 ft. extension cable

# Extension Cable | SeleCCTable Driver/

HLB06FSEC - 6 ft. extension cable HLB12FSEC - 12 ft. extension cable HLB20FSEC - 20 ft. extension cable

9	y Data
Lumens	600 Series
Input Voltage	120V
Input Current	90 (mA)
Input Power	10.5 (W)
Efficiency	60 (LPW)
Inrush (A)	2.2 A @ 54mS
THD	≤ 20%
PF	≥ 0.90
T Ambient	-30° - +40°C
Sound Rating	≤ 22dba



<sup>a</sup> Savings are over the life of the HALO HLB4SP luminaire

Energy savings: \$327

Replacement lamp savings: \$50

Savings based on \$0.128 per kilowatt hour, average six hours use per day, 50,000 hours of lamp usage, and 60W A19 lamp lumen equivalent.



- Up to 1100 lumens
- Use to replace 75W A19 incandescent lamp
- 2700K, 3000K, 3500K, 4000K, 5000K CCT field select
- 3000K, 4000K fixed CCT
- 90 CRI
- 16W, 120V or 15W, 120V-277V
- UNV
- L70 @ 50,000 hrs
- · HALO matte white finish

- No existing recessed housing or junction box required
- Fixture will not fit into existing housings or junction boxes
- Wet location listed (shower rated) covered ceiling
- Rated for direct contact to air permeable insulation
- AIR-TITE™ certified per ASTM-E283
- Textured lens provides smooth light distribution
- · Five-year limited warranty
















Refer to ENERGY STAR® Certified Products List. Can be used to comply with California Title 24 High Efficacy requirements. Certified to California Appliance Efficiency Database under JA8.



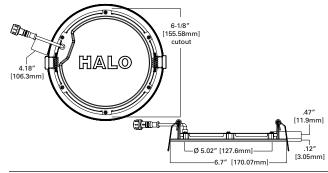

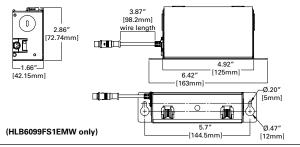

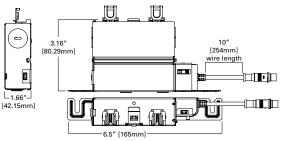

### Ordering Information

### SAMPLE NUMBER: HLB6099FS1EMWR

Models	Lumens	CRI / CCT	Driver	Finish	Packaging
HLB6 = 6-Inch ultra-thin LED lens downlight with remote driver / junction box	<b>09</b> = 900 lumen (nominal)	930 = 90 CRI minimum, 3000K CCT 940 = 90 CRI minimum, 4000K CCT 9FS = 90 CRI minimum, field selectable 2700K, 3000K, 3500K, 4000K or 5000K CCT	<b>1E</b> = 120V 60Hz, LE & TE phase cut 5% dimming <b>E010</b> = 120V-277V; 0-10V dim to 5%	MW = matte white flange	R = recyclable 4-color unit carton suitable for point of purchase merchandizing display

### Accessories

### Oversized Trim Ring

HLB6SOTMW = 6" square oversized trim, matte white

**Decorative Trim Ring** 

**HLB6STRMMW** = 6" square decorative overlay, matte white **HLB6STRMSN** = 6" square decorative overlay, satin nickel

HLB6STRMTBZ = 6" square decorative overlay, tuscan bronze

**Mounting Frame** 

**HL6RSMF** = 6" round and square mounting frame

### Extension Cable | Dedicated Driver/Jbox

HLB06EC - 6 ft. extension cable HLB12EC - 12 ft. extension cable HLB20EC - 20 ft. extension cable

# Extension Cable | SeleCCTable Driver/

<u>Jbox</u>

HLB06FSEC - 6 ft. extension cable

HLB12FSEC - 12 ft. extension cable HLB20FSEC - 20 ft. extension cable

	ì
<b>5°35Z</b>	ı
SAVINGS	
	,

<sup>a</sup> Savings are over the life of the HALO HLB6 luminaire Energy savings: \$302

Replacement lamp savings: \$50

Savings based on \$0.128 per kilowatt hour, average six hours use per day, 50,000 hours of lamp usage, and 75W A19 lamp lumen equivalent.


_	
Lumens	900 Series
Input Voltage	120V
Input Current	132 (mA)
Input Power	16.0 (VV)
Efficiency	66 (LPW)
Inrush (A)	2.1 A @ 14mS
THD	≤ 20%
PF	≥ 0.90
T Ambient	-30° - +40°C
Sound Rating	≤ 22dba


**Energy Data** 




- Up to 1100 lumens
- Use to replace 75W A19 incandescent lamp
- · 2700K, 3000K, 3500K, 4000K, 5000K CCT field select
- 90 CRI
- 16W, 120V or
- L70 @ 50,000 hrs
- · HALO matte white finish
- · No existing recessed housing or junction box required

- · Fixture will not fit into existing housings or junction boxes
- · Wet location listed (shower rated) covered ceiling
- · Rated for direct contact to air permeable insulation
- AIR-TITE™ certified per ASTM-E283
- · Round polymer trim and smooth lens
- · Five-year limited warranty



















Refer to ENERGY STAR® Certified Products List. Can be used to comply with California Title 24 High Efficacy requirements. Certified to California Appliance Efficiency Database under JA8.



### Ordering Information

### SAMPLE NUMBER: HLB6099FS1EMWR

Models	Lumens	CRI / CCT	Driver	Finish	Packaging
HLBPH6 = 6-Inch LED smooth lens downlight with plastic housing and remote driver / junction box	<b>09</b> = 900 lumen (nominal)	<b>9FS</b> = 90 CRI minimum, field selectable 2700K, 3000K, 3500K, 4000K or 5000K CCT	<b>1E</b> = 120V 60Hz, LE & TE phase cut 5% dimming	MW = matte white flange	R = recyclable 4-color unit carton suitable for point of purchase merchandizing display

## Accessories

### **Oversized Trim Ring**

HLB6SOTMW = 6" square oversized trim, matte white

**Decorative Trim Ring** 

HLB6STRMMW = 6" square decorative overlay, matte white **HLB6STRMSN** = 6" square decorative overlay, satin nickel

HLB6STRMTBZ = 6" square decorative overlay, tuscan bronze

**Mounting Frame** 

**HL6RSMF** = 6" round and square mounting frame

# Extension Cable | SeleCCTable Driver/

HLB06FSEC - 6 ft. extension cable HLB12FSEC - 12 ft. extension cable HLB20FSEC - 20 ft. extension cable

Lumens	900 Series
Input Voltage	120V
Input Current	0.117 (A)
Input Power	14.0 (W)
Efficiency	72.5 (LPW)
Inrush (A)	0.98 A @ 108 μS
THD	≤ 7.2%
PF	≥ 0.99
T Ambient	-30° - +40°C
Sound Rating	≤ 22dba

**Energy Data** 



Savings are over the life of the HALO HLBPH6 luminaire. Energy savings: \$327

Replacement lamp savings: \$50

Savings based on \$0.128 per kilowatt hour, average six hours use per day, 50,000 hours of lamp usage, and 75W A19 lamp lumen equivalent.




- Up to 1100 lumens
- Use to replace 75W A19 incandescent lamp
- · 2700K, 3000K, 3500K, 4000K, 5000K CCT
- 3000K, 4000K fixed CCT
- 90 CRI
- 16W, 120V or 15W 120V-277V UNV
- L70 @ 50,000 hrs
- · HALO matte white finish
- · No existing recessed housing or junction box required

- · Fixture will not fit into existing housings or junction boxes
- · Wet location listed (shower rated) covered ceiling
- · Rated for direct contact to air permeable insulation
- AIR-TITE™ certified per ASTM-E283
- · Textured lens provides smooth light distribution
- · Five-year limited warranty




4.18"

[106.3mm]



出風几〇

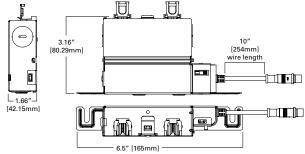













Refer to ENERGY STAR® Certified Products List. Can be used to comply with California Title 24 High Efficacy requirements. Certified to California Appliance Efficiency Database under JA8.



### Ordering Information

### SAMPLE NUMBER: HLB6S099FS1EMWR

Models	Lumens	CRI / CCT	Driver	Finish	Packaging
HLB6S = 6-Inch LED square lens downlight with remote driver / junction box	<b>09</b> = 900 lumen (nominal)	930 = 90 CRI minimum, 3000K CCT 940 = 90 CRI minimum, 4000K CCT 9FS = 90 CRI minimum, field selectable 2700K, 3000K, 3500K, 4000K or 5000K CCT	<b>1E</b> = 120V 60Hz, LE & TE phase cut 5% dimming <b>E010</b> = 120V-277V; 0-10V dim to 5%	MW = matte white flange	R = recyclable 4-color unit carton suitable for point of purchase merchandizing display

### Accessories

### **Oversized Trim Ring**

HLB6SOTMW = 6" square oversized trim, matte white

**Decorative Trim Ring** 

HLB6STRMMW = 6" square decorative overlay, matte white **HLB6STRMSN** = 6" square decorative overlay, satin nickel HLB6STRMTBZ = 6" square decorative overlay, tuscan bronze

**Mounting Frame** 

**HL6RSMF** = 6" round and square mounting frame

Extension Cable | Dedicated Driver/Jbox

HLB06EC - 6 ft. extension cable HLB12EC - 12 ft. extension cable HLB20EC - 20 ft. extension cable

# Extension Cable | SeleCCTable Driver/

HLB06FSEC - 6 ft. extension cable HLB12FSEC - 12 ft. extension cable HLB20FSEC - 20 ft. extension cable



<sup>a</sup> Savings are over the life of the HALO HLB6S luminaire Energy savings: \$302

Replacement lamp savings: \$50

Savings based on \$0.128 per kilowatt hour, average six hours use per day. 50,000 hours of lamp usage, and 75W A19 lamp lumen equivalent.

Lumens	900 Series
Input Voltage	120V
Input Current	120 (mA)
Input Power	14.0 (W)
Efficiency	66 (LPW)
Inrush (A)	2.2 A @ 45mS
THD	≤ 20%
PF	≥ 0.90
T Ambient	-30° - +40°C
Sound Rating	≤ 22dba

**Energy Data** 



- Up to 1600 lumens
- Use to replace 130W PAR38 incandescent lamp
- 2700K, 3000K, 3500K, 4000K, 5000K CCT field select
- 90 CRI
- 16W, 120V
- L70 @ 50,000 hrs
- HALO matte white finish
- No existing recessed housing or junction box required

- Fixture will not fit into existing housings or junction boxes
- Wet location listed (shower rated) covered ceiling
- Rated for direct contact to air permeable insulation
- AIR-TITE™ certified per ASTM-E283
- Textured lens provides smooth light distribution
- · Five-year limited warranty















Refer to ENERGY STAR® Certified Products List. Can be used to comply with California Title 24 High Efficacy requirements. Certified to California Appliance Efficiency Database under JA8.



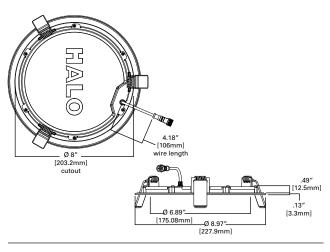

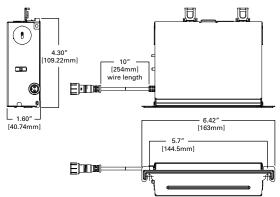

### Ordering Information

### SAMPLE NUMBER: HLB8169FS1EMWR

Models	Lumens	CRI / CCT	Driver	Finish	Packaging
HLB8 = 8-Inch LED lens downlight with remote driver / junction box	<b>16</b> = 1600 lumen (nominal)	9FS = 90 CRI minimum, field selectable 2700K, 3000K, 3500K, 4000K or 5000K CCT	<b>1E</b> = 120V 60Hz, LE &TE phase cut 5% dimming	MW = matte white flange	R = recyclable 4-color unit carton suitable for point of purchase merchandising display

### Accessories

### **Oversized Trim Ring**

**HLB8ROTMW** = 8" oversized trim, matte white

**Mounting Frame** 

HL8RSMF = 8" round and square mounting frame

Extension Cable | SeleCCTable Driver/Jbox

HLB06FSEC - 6 ft. extension cable HLB12FSEC - 12 ft. extension cable HLB20FSEC - 20 ft. extension cable



<sup>a</sup> Savings are over the life of the HALO HLB8 luminaire

Energy savings: \$469

Replacement lamp savings: \$140

Savings based on \$0.128 per kilowatt hour, average six hours use per day, 50,000 hours of lamp usage, and 130W PAR38 lamp lumen equivalent.

Energy Data						
Lumens	1600 Series					
Input Voltage	120V					
Input Current	170 (mA)					
Input Power	20.9 (W)					
Efficiency	84.3 (LPW)					
Inrush (A)	1.2 A @ 72µS					
THD	≤ 20%					
PF	≥ 0.90					
T Ambient	-30° - +40°C					
Sound Rating	≤ 22dba					



- 1400lm, 1900lm or 2400lm selectable lumen
- Use to replace 130W PAR38 incandescent lamp
- 2700K, 3000K, 3500K, 4000K, 5000K CCT field select
- 90 CRI
- 17-32W; 120V 277V UNV
- L70 @ 50,000 hrs
- · HALO matte white finish
- · No existing recessed housing or junction box required

- · Fixture will not fit into existing housings or junction boxes
- · Wet location listed (shower rated) covered ceiling
- · Rated for direct contact to air permeable insulation
- AIR-TITE™ certified per ASTM-E283
- · Textured lens provides smooth light distribution
- · Five-year limited warranty

















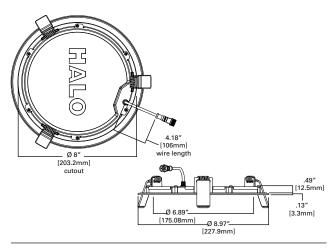

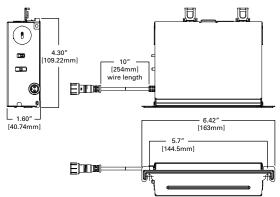

### Ordering Information

### SAMPLE NUMBER: HLB8LS9FSE010MWR

to comply with California Title 24 High Efficacy requirements. Certified to California Appliance Efficiency Database under JA8.

Models	Lumens	CRI / CCT	Driver	Finish	Packaging
HLB8 = 8-Inch LED lens downlight with remote driver / junction box	LS = Lumen selectable 1400, 1900, 2400 lumens (nominal)	<b>9FS</b> = 90 CRI minimum, field selectable 2700K, 3000K, 3500K, 4000K or 5000K CCT	<b>E010</b> = 120/277V 60Hz, 0-10V dimming	MW = matte white flange	R = recyclable 4-color unit carton suitable for point of purchase merchandising display

### Accessories

### Oversized Trim Ring

HLB8ROTMW = 8" oversized trim, matte white

**Mounting Frame** 

HL8RSMF = 8" round and square mounting frame

Extension Cable | SeleCCTable Driver/Jbox

HLB06FSEC - 6 ft. extension cable HLB12FSEC - 12 ft. extension cable HLB20FSEC - 20 ft. extension cable



A Savings are over the life of the HALO HLB8 luminaire Energy savings: \$588

Replacement lamp savings: \$164

Savings based on \$0.128 per kilowatt hour, average six hours use per day, 50,000 hours of lamp usage, and 130W PAR38 lamp lumen equivalent.

Energy Data								
Lumens	1400 L	umens	1900 L	umens	2400 Lumens			
Input Voltage	120V	277V	120V	277V	120V	277V		
Input Current	154 (mA)	73 (mA)	222 (mA)	103 (mA)	277 (mA)	117 (mA)		
Input Power	16.9	(VV)	24.6	(VV)	31.9 (VV)			
Efficiency	81.8 (LPW)		79.1 (	79.1 (LPW)		74.4 (LPW)		
Inrush (A)	1.52 A @ 109 µS	1.79 A @159 μS	1.42 A @ 117 μS	1.83 A @ 137 µS	1.27 A @ 126 µS	1.78 A @ 168 μS		
THD		≤ 20%						
PF	≥ 0.90							
T Ambient	-30° - +40°C							
Sound Rating			≤ 22	dba				



- 1300lm, 1900lm or 2300lm selectable lumen
- Use to replace 130W PAR38 incandescent lamp
- 2700K, 3000K, 3500K, 4000K, 5000K CCT field select
- 90 CRI
- 17-32W; 120V-277V UNV
- L70 @ 50,000 hrs
- · HALO matte white finish
- · No existing recessed housing or junction box required

- · Fixture will not fit into existing housings or junction boxes
- · Wet location listed (shower rated) covered ceiling
- · Rated for direct contact to air permeable insulation
- AIR-TITE™ certified per ASTM-E283
- · Textured lens provides smooth light distribution
- · Five-year limited warranty
















Refer to ENERGY STAR® Certified Products List. Can be used to comply with California Title 24 High Efficacy requirements. Certified to California Appliance Efficiency Database under JA8.



# 4.18 [106mm] wire length Ø 12" [304.8mm] .49" [12.5mm] cutout .13" 10.89 [3.3mm] [276.61mm] — 13" — [330.16mm]

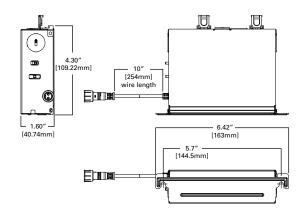

### **Ordering Information**

## CAMDLE NILIMPED: LII R121 COECEC10MM//D

SAINT LE NOMBER. HEB12E3313E010WWW								
Models	Lumens	CRI / CCT	Driver	Finish	Packaging			
HLB12 = 12-Inch LED lens downlight with remote driver / junction box	LS = Lumen selectable 1400, 1900, 2400 lumens (nominal)	<b>9FS</b> = 90 CRI minimum, field selectable 2700K, 3000K, 3500K, 4000K or 5000K CCT	<b>E010</b> = 120/277V 60Hz, 0-10V dimming	MW = matte white flange	R = recyclable 4-color unit carton suitable for point of purchase merchandising display			

### Accessories

### Oversized Trim Ring

HLB12ROTMW = 12" oversized trim, matte white

Extension Cable | SeleCCTable Driver/Jbox

HLB06FSEC - 6 ft. extension cable HLB12FSEC - 12 ft. extension cable HLB20FSEC - 20 ft. extension cable

CAMINICC
SAVIIVUS

<sup>a</sup> Savings are over the life of the HALO HLB12 luminaire.

Energy savings: \$590

Replacement lamp savings: \$164

Savings based on \$0.128 per kilowatt hour, average six hours use per day, 50,000 hours of lamp usage, and 130W PAR38 lamp lumen equivalent.

Dilvei	FIIIISII	Fackaging
<b>E010</b> = 120/277V 60Hz, 0-10V dimming	<b>MW</b> = matte white flange	carton suitable for point of purchase merchandising

Energy Data							
Lumens	1300 Lumens		1900 L	umens	2300 Lumens		
Input Voltage	120V	120V 277V 120V 277V		120V	277V		
Input Current	153 (mA)	72 (mA)	220 (mA)	102 (mA)	276 (mA)	115 (mA)	
Input Power	16.7	(VV)	24.4	· (VV)	31.6	(VV)	
Efficiency	78.9 (LPW)		75.4 (LPW)		71.5 (LPW)		
Inrush (A)	1.58 A @ 145 µS	1.82 A @142 μS	1.51 A @ 132 µS	1.88 A @ 136 µS	1.43 A @ 153 μS	1.72 A @ 171 µS	
THD			≤ 2	0%			
PF	≥ 0.90						
T Ambient	-30° - +40°C						
Sound Rating			≤ 22	dba			

30 31 halolighting.com halolighting.com



- Up to 700 lumens
- Use to replace 50W BR30 halogen lamp
- 2700K and 3000K fixed CCT
- 90 CRI
- 8.6W, 120V
- L70 @ 50,000 hrs
- · HALO matte white finish
- · No existing recessed housing or junction box required
- Fixture will not fit into existing housings or junction boxes
- · Wet location listed (shower rated) covered ceiling
- Rated for direct contact to air permeable insulation
- AIR-TITE™ certified per ASTM-E283
- · Five-year limited warranty














Refer to ENERGY STAR® Certified Products List. Can be used to comply with California Title 24 High Efficacy requirements. Certified to California Appliance Efficiency Database under JA8.



# 1.28" [32.5mm] -.50" Ø 2.20" [2.5mm] [12.7mm] [55.9mm] .Ø 3.25" [82.6mm] Ø 3.60" [91.5mm] 360 Ø 3.25" [82.6mm] -Ø 3.60"⋅ **ROTATION** [91.5mm]

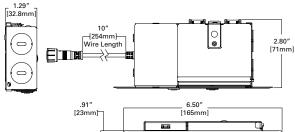

# ⊐®

### Ordering Information

### SAMPLE NUMBER: HLA406VWFL9FS1EMWR

Models	Lumens	Distribution	CRI / CCT	Driver	Finish	Packaging
HLA3 = 3-Inch LED round directional with remote driver / junction box	<b>05</b> = 500 lumen (nominal)	<b>FL</b> = 40° flood distribution	<b>927</b> = 90 CRI minimum, 2700K CCT <b>930</b> = 90 CRI minimum, 3000K CCT	<b>1E</b> = 120V 60Hz, LE &TE phase cut 5% dimming	MW = matte white flange	R = recyclable 4-color unit carton suitable for point of purchase merchandizing display

### Accessories

# Oversized Trim Ring

HLB3ROTMW = 3" round oversized trim, matte white

**Decorative Trim Ring** 

HLB3RTRMMW = 3" round decorative overlay, matte white HLB3RTRMSN = 3" round decorative overlay, satin nickel HLB3RTRMTBZ = 3" round decorative overlay, tuscan bronze Extension Cables | Dedicated Driver/Jbox HLB06EC = 6 ft. extension cable

HLB12EC = 12 ft. extension cable HLB20EC = 20 ft. extension cable



<sup>a</sup> Savings are over the life of the HALO HLA3 luminaire. Energy savings: \$353

Replacement lamp savings: \$1.07

Savings based on \$0.128 per kilowatt hour, average six hours use per day, 50,000 hours of lamp usage, and 50W BR30 lamp lumen equivalent.





- Up to 700 lumens
- Use to replace 50W BR30 halogen lamp
- · 2700K and 3000K fixed CCT
- 90 CRI
- 8.6W, 120V
- L70 @ 50,000 hrs
- · HALO matte white finish
- · No existing recessed housing or junction box required
- Fixture will not fit into existing housings or junction boxes
- · Wet location listed (shower rated) covered ceiling
- Rated for direct contact to air permeable insulation
- AIR-TITE™ certified per ASTM-E283
- · Five-year limited warranty














Refer to ENERGY STAR® Certified Products List. Can be used to comply with California Title 24 High Efficacy requirements. Certified to California Appliance Efficiency Database under JA8.



# 1.28" [32.5mm] .50" Ø 2.20" [2.5mm] [12.7mm] [55.9mm] .Ø 3.25" [82.6mm] Ø 3.60" [91.5mm] TILT 360 Ø 3.25" [82.6mm] -Ø 3.60" ROTATION [91.5mm] 1.29"

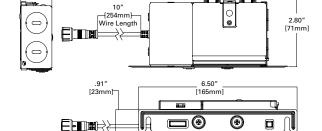

# Ordering Information

### SAMPLE NUMBER: HLA406VWFL9FS1EMWR

Models	Lumens	Distribution	CRI / CCT	Driver	Finish	Packaging
HLA3S = 3-Inch LED square directional with remote driver / junction box	<b>05</b> = 500 lumen (nominal)	<b>FL</b> = 40° flood distribution	<b>927</b> = 90 CRI minimum, 2700K CCT <b>930</b> = 90 CRI minimum, 3000K CCT	<b>1E</b> = 120V 60Hz, LE &TE phase cut 5% dimming	MW = matte white flange	R = recyclable 4-color unit carton suitable for point of purchase merchandizing display

### Accessories

# Oversized Trim Ring

HLB3SOTMW = 3" round oversized trim, matte white

Decorative Trim Ring

HLB3STRMMW = 3" square decorative overlay, matte white HLB3STRMSN = 3" square decorative overlay, satin nickel HLB3STRMTBZ = 3" square decorative overlay, tuscan bronze

Extension Cables | Dedicated Driver/Jbox

HLB06EC = 6 ft. extension cable HLB12EC = 12 ft. extension cable HLB20EC = 20 ft. extension cable

[32.8mm]



<sup>a</sup> Savings are over the life of the HALO HLA3 luminaire.

Energy savings: \$353

Replacement lamp savings: \$1.07

Savings based on \$0.128 per kilowatt hour, average six hours use per day, 50,000 hours of lamp usage, and 50W BR30 lamp lumen equivalent.





- Use to replace 60W A19 incandescent lamp
- · 2700K, 3000K, 3500K, 4000K, 5000K CCT field select
- 90 CRI
- 12W. 120V
- L70 @ 50,000 hrs
- · HALO matte white finish
- · No existing recessed housing or junction box required
- · Fixture will not fit into existing housings or junction boxes
- Wet location listed (shower rated) covered ceiling
- Rated for direct contact to air permeable insulation
- AIR-TITE™ certified per ASTM-E283
- · Five-year limited warranty



















Refer to ENERGY STAR® Certified Products List. Can be used to comply with California Title 24 High Efficacy requirements. Certified to California Appliance Efficiency Database under JA8.



# Ordering Information

### SAMPLE NUMBER: HLA406VWFL9FS1EMWR

Models	Lumens	Distribution	CRI / CCT	Driver	Finish	Packaging
HLA4 = 4-Inch LED round directional with remote driver / junction box	<b>06</b> = 600 lumen (nominal)	FL = 40° flood distribution VWFL = 80° very wide flood distribution	9FS = 90 CRI minimum, field selectable 2700K, 3000K, 3500K, 4000K or 5000K CCT	<b>1E</b> = 120V 60Hz, LE &TE phase cut 5% dimming	<b>MW</b> = matte white flange	R = recyclable 4-color unit carton suitable for point of purchase merchandizing display

1.94"

[49.39mm]

TILT

**ROTATION** 

3.16"

[80.29mm]

0

1.66″ [42.15mm] 3.1"

[78.74mm]

4.19

[106.36mm]

4.73"

[120.09mm]

 $\mathbb{I}$ 

**®** ①

### Accessories

### **Oversized Trim Ring**

HLB4ROTMW = 4" round oversized trim, matte white

## **Decorative Trim Ring**

HLB4RTRMMW = 4" round decorative overlay, matte white **HLB4RTRMSN** = 4" round decorative overlay, satin nickel HLB4RTRMTBZ = 4" round decorative overlay, tuscan bronze

**HL4RSMF** = 4" round and square mounting frame



<sup>a</sup> Savings are over the life of the HALO HLA4 luminaire.

Energy savings: \$327

Replacement lamp savings: \$50

Savings based on \$0.128 per kilowatt hour, average six hours use per day, 50,000 hours of lamp usage, and 60W A19 lamp lumen equivalent.

### Extension Cable | SeleCCTable Driver/Jbox

HLB06FSEC - 6 ft. extension cable HLB12FSEC - 12 ft. extension cable HLB20FSEC - 20 ft. extension cable

Energy Data						
600 Series						
120V						
90 (mA)						
10.5 (W)						
60 (LPW)						
1.9 A @ 54mS						
≤ 20%						
≥ 0.90						
-30° - +40°C						
≤ 22dba						

1.34"

[34.15mm]

4.188" [106.36mm]

-[12.7mm]

4.728"

[120.09mm]

10"

[254mm]

wire length

[2.54mm]





HLA4S06VWFL9FS1EMWR













- Use to replace 60W A19 incandescent lamp
- 2700K, 3000K, 3500K, 4000K, 5000K CCT field select
- 90 CRI
- 12W, 120V
- L70 @ 50,000 hrs
- · HALO matte white finish
- · No existing recessed housing or junction box required
- · Fixture will not fit into existing housings or junction boxes
- Wet location listed (shower rated) covered ceiling
- Rated for direct contact to air permeable insulation
- AIR-TITE™ certified per ASTM-E283
- · Five-year limited warranty

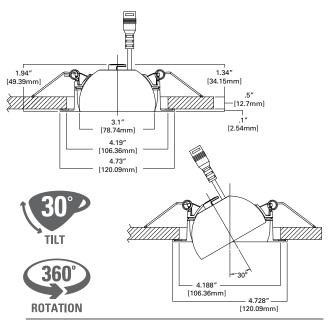

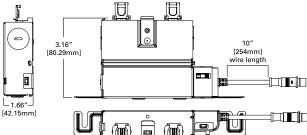













Refer to ENERGY STAR® Certified Products List. Can be used to comply with California Title 24 High Efficacy requirements. Certified to California Appliance Efficiency Database under JA8.



### Ordering Information

### SAMPLE NUMBER: HLA4S06VWFL9FS1EMWR

Models	Lumens	Distribution	CRI / CCT	Driver	Finish	Packaging
HLA4S = 4-Inch LED round square directional with remote driver / junction box	06 = 600 lumen (nominal)	FL = 40° flood distribution VWFL = 80° very wide flood distribution	9FS = 90 CRI minimum, field selectable 2700K, 3000K, 3500K, 4000K or 5000K CCT	<b>1E</b> = 120V 60Hz, LE &TE phase cut 5% dimming	<b>MW</b> = matte white flange	R = recyclable 4-color unit carton suitable for point of purchase merchandizing display

### Accessories

### **Oversized Trim Ring**

HLB4SOTMW = 4" square oversized trim, matte white

## **Decorative Trim Ring**

HLA4STRMMW = 4" square decorative overlay, matte white **HLA4STRMSN** = 4" square decorative overlay, satin nickel **HLA4STRMTBZ** = 4" square decorative overlay, tuscan bronze

**HL4RSMF** = 4" round and square mounting frame



Savings are over the life of the HALO HLA4S luminaire.

Energy savings: \$327

Replacement lamp savings: \$50

Savings based on \$0.128 per kilowatt hour, average six hours use per day, 50,000 hours of lamp usage, and 60W A19 lamp lumen equivalent.

### Extension Cable | SeleCCTable Driver/Jbox

HLB06FSEC - 6 ft. extension cable

HLB12FSEC - 12 ft. extension cable HLB20FSEC - 20 ft. extension cable

Energ	Energy Data					
Lumens	600 Series					
Input Voltage	120V					
Input Current	90 (mA)					
Input Power	10.5 (VV)					
Efficiency	60 (LPW)					
Inrush (A)	1.9 A @ 54mS					
THD	≤ 20%					
PF	≥ 0.90					
T Ambient	-30° - +40°C					
Sound Rating	≤ 22dba					

# **Decorative Overlay**



### 3" Round

HLB3RTRMMW = matte white HLB3RTRMSN = satin nickel HLB3RTRMTBZ = tuscan bronze

### 3" Square

HLB3STRMMW = matte white HLB3STRMSN = satin nickel HLB3STRMTBZ = tuscan bronze

#### 4" Round

HLB4RTRMMW = matte white HLB4RTRMSN = satin nickel HLB4RTRMTBZ = tuscan bronze

### 4" Square

HLB4STRMMW = matte white HLB4STRMSN = satin nickel HLB4STRMTBZ = tuscan bronze

### 4" Square Adjustable

HLA4STRMMW = matte white HLA4STRMSN = satin nickel HLA4STRMTBZ = tuscan bronze

### 6" Round

HLB6RTRMMW = matte white HLB6RTRMSN = satin nickel HLB6RTRMTBZ = tuscan bronze

### 6" Square

HLB6STRMMW = matte white HLB6STRMSN = satin nickel HLB6STRMTBZ = tuscan bronze

## **Oversized Trim Plate**



**HLB3ROTMW** - 3" round oversized trim

HLB3SOTMW - 3" square oversized trim

HLB4ROTMW - 4" round oversized trim

**HLB4SOTMW** - 4" square oversized trim

**HLB6ROTMW** - 6" round oversized trim **HLB6SOTMW** - 6" square oversized trim

HLB8ROTMW - 8" round oversized trim

HLB12ROTMW - 12" round oversized trim

### **Extension cables**



### Dedicated driver / junction box

HLB06EC - 6 ft. extension cable HLB12EC - 12 ft. extension cable HLB20EC - 20 ft. extension cable

### SeleCCTable driver / junction box

HLB06FSEC - 6 ft. extension cable HLB12FSEC - 12 ft. extension cable HLB20FSEC - 20 ft. extension cable

# **Mounting Frames**



**HL4RSMF** - 4" round and square mounting frame



**HL6RSMF** - 6" round and square mounting frame



**HL8RSMF** - 8" round and square mounting frame



During electrical rough-in, the HLB driver / junction box attaches to the mounting frame with captive fasteners meeting code requirements for attachment to the building structure.



halolighting.com 41

# HLB3059FS1EMWR

HLB3 SeleCCTable

	ССТ	Lumens	Power (W)	LPW
3in HLB	2700K	573	8.5	67.4
	3000K	578	8.6	67.2
	3500K	595	8.6	69.2
	4000K	603	8.6	70.1
	5000K	607	8.6	70.6

HLB3059FS1EMW-3000K				
Luminaire lumens		578		
Input	Input watts			
LER (LPW)		67.2		
	0-180	1.12		
Spacing Criteria	90-270	1.12		
Criteria	Diagonal	1.22		
Beam angle (degrees)		87.9		
Field angle (degrees)		141.2		
Zonal lumen	Lumens	% Lumens		
0-30	164.2	28.4		
0-40	268.8	46.5		
0-60	464.7	80.4		
0-90	578.0	100		

Color Metric Summary-3000K			
TM-30-15	Rf = 92		
1101-30-15	Rg = 99		
CDI/CIE	Ra = 95.2		
CRI/CIE R9 = 73.7			





# HLB3S059FS1EMWR

HLB3S SeleCCTable


	ССТ	Lumens	Power (W)	LPW
	2700K	580	8.4	69.0
	3000K	595	8.4	70.8
3in HLBS	3500K	605	8.4	72.0
	4000K	618	8.4	73.6
	5000K	627	8.4	74.6

HLB3S059FS1EMW-3000K			
Luminaire lumens		595	
Input watts		8.4	
LER (LPW)		70.8	
C	0-180	1.12	
Spacing Criteria	90-270	1.12	
Gillella	Diagonal	1.22	
Beam angle (degrees)		87.9	
Field angle (degrees)		141.2	
		0/ 1	
Zonal lumen	Lumens	% Lumens	
Zonal lumen 0-30	166.0	% Lumens 27.9	
0-30	166.0	27.9	
0-30 0-40	166.0 273.1	27.9 45.9	

Color Metric Summary-3000K			
TM 20 1F	Rf = 92		
TM-30-15 Rg = 99			
CDUCIE	Ra = 96.1		
CRI/CIE R9 = 78.6			





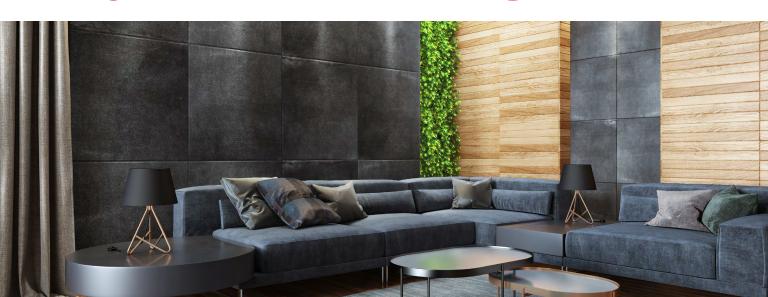

<sup>\*</sup>Additional photometric ies files available online.

## **HLB4069FS1EMWR**

HLB4 SeleCCTable

	ССТ	Lumens	Power (W)	LPW
	2700K	720.0	12	60.0
	3000K	723.0	12	60.3
4in HLB	3500K	735.2	12	61.3
	4000K	746.1	12	62.2
	5000K	751.9	12	62.7

HLB4069FS1EMWR-3000K			
Luminair	723		
Input	Input watts		
LER (LPW)		60.3	
C	0-180	1.28	
Spacing Criteria	90-270	1.28	
Citteria	Diagonal	1.39	
Beam angl	110.2		
Field angle (degrees)		160	
Zonal lumen	onal lumen Lumens		
Zonar lulliell	Lamens	% Lumens	
0-30	203	28.1	
0-30	203	28.1	
0-30 0-40	203 335	28.1 46.3	

Color Metric Summary-3000K		
TM-30-15	Rf = 90.9	
1101-30-13	Rg = 100.7	
CDUCIE	Ra = 94.1	
CRI/CIE	R9 = 68.5	





\*Additional photometric ies files available online.

## **HLBPH4069FS1EMWR**

HLBPH4 SeleCCTable

	ССТ	Lumens	Power (W)	LPW
	2700K	745	10.2	73.0
	3000K	805	10.2	78.9
4in HLBPH	3500K	820	10.2	80.4
	4000K	825	10.3	80.1
	5000K	830	10.3	80.6

HLBPH4069FS1EMWR-3000K			
Luminair	805		
Input watts		10.2	
LER (LPW)		78.9	
Curring	0-180	1.24	
Spacing Criteria	90-270	1.24	
Citteria	Diagonal	1.35	
Beam angle (degrees)		109	
Field angle (degrees)		160	
Zonal lumen	Lumens	% Lumens	
0-30	233	28	
0-40	363	45.6	
0-60	635	79.8	
0-90	796	100	
80° 70° 60° 50° 40°			

Color Metric Summary-3000K		
TM-30-15	Rf = 92	
Rg = 102		
CDI/CIE	Ra = 96	
CRI/CIE R9 = 79		

CCT - Range of 2700K- 5000K





## HLB4S069FS1EMWR

HLB4S SeleCCTable

	ССТ	Lumens	Power (W)	LPW
	2700K	684.9	10.1	67.8
	3000K	695.9	10.1	68.9
4in HLBS	3500K	689.6	10.1	68.3
	4000K	693.7	10.1	68.7
	5000K	694.6	10.1	68.8

HLB4S069FS1EMW-3000K			
Luminair	696		
Input watts		10.1	
LER (LPW)		68.9	
Cuasina	0-180	1.30	
Spacing Criteria	90-270	1.32	
Ontena	Diagonal	1.40	
Beam angl	e (degrees)	110.3	
Field angle	e (degrees)	161.8	
Zonal lumen Lumens		% Lumens	
0-30	196	28.1	
0-40	0-40 321		
0-60	0-60 557		
0-90 696		100	
807 707			

Color Metric Summary-3000K		
TM-30-15	Rf = 90.1	
1101-30-13	Rg = 97.9	
CRI/CIE	Ra = 95	
CNI/CIE	R9 = 75.8	

CCT - Range of 2700K- 5000K



\*Additional photometric ies files available online.

## HLB4SP069FS1EMWR

HLB4SP SeleCCTable

	ССТ	Lumens	Power (W)	LPW
	2700K	638	10.2	62.6
	3000K	654	10.2	64.1
4in HLBSP	3500K	669	10.1	66.2
	4000K	683	10.1	67.6
	5000K	704	10.1	69.7

III D 4000000455554 00004			
HLB4S069FS1EMW-3000K			
Luminaire lumens		654	
Input watts		10.2	
LER (	LPW)	64.12	
Cuasina	0-180	1.16	
Spacing Criteria	90-270	1.18	
Diagonal		1.18	
Beam angle (degrees)		82.8	
Field angle (degrees)		147.1	
Zonal lumen Lumens		% Lumens	
0-30 247.2		37.8	
0-30	247.2	37.0	
0-30 0-40	380	58.1	
0-40	380	58.1	

Color Metric Summary-3000K			
TM-30-15	Rf = 94		
1101-30-13	Rg = 100		
ODUGIE	Ra = 96.2		
CRI/CIE	R9 = 82.2		

CCT - Range of 2700K- 5000K





## HLB6099FS1EMWR

HLB6 SeleCCTable

	ССТ	Lumens	Power (W)	LPW
	2700K	1037.3	16	64.8
	3000K	1061.0	16	66.3
6in HLB	3500K	1078.9	16	67.4
	4000K	1094.9	16	68.4
	5000K	1103.4	16	69.0

HLB6099FS1EMWR-3000K			
Luminair	1061		
Input	Input watts		
LER (LPW)		66.3	
Canalana	0-180	1.31	
Spacing Criteria	90-270	1.31	
Gillella	Diagonal	1.41	
Beam angle (degrees)		112.2	
Field angle (degrees)		161.3	
Zonal lumen	Lumens	% Lumens	
0-30	294	27.7	
0-30	294	27.7	
0-30 0-40	294 486	27.7 45.8	

Color Metric Summary-3000K			
TM-30-15	Rf = 90.9		
1101-30-13	Rg = 100.7		
CRI/CIE	Ra = 94.1		
	R9 = 68.4		

CCT - Range of 2700K- 5000K



\*Additional photometric ies files available online.

## HLBPH6099FS1EMWR

HLBPH6 SeleCCTable

	ССТ	Lumens	Power (W)	LPW
	2700K	995	14.2	70.1
	3000K	1015	14.2	71.5
6in HLBPH	3500K	1055	14.3	73.8
	4000K	1080	14.3	75.5
	5000K	1100	14.2	77.5

III D000000010158884 00004			
HLB6S099FS1EMW-3000K			
Luminaire lumens		1015	
Input	watts	14.2	
LER (	LPW)	71.5	
Cuasina	0-180	1.23	
Spacing Criteria	90-270	1.23	
Ontena	Diagonal	1.35	
Beam angle (degrees)		109	
Field angle (degrees)		160	
Zonal lumen Lumens		% Lumens	
0-30	292	28.1	
0-40 476		45.7	
0-60 831		79.9	
0-90 1041		100	
80° 70° 60° 50° 0° 10° 20° 30°			

Color Metric Summary-3000K			
TM 20 15	Rf = 91		
TM-30-15 Rg = 98			
CRI/CIE	Ra = 94		
CRI/CIE	R9 = 69		

CCT - Range of 2700K- 5000K





# HLB6S099FS1EMWR

HLB6S SeleCCTable

	ССТ	Lumens	Power (W)	LPW
	2700K	954	13.7	69.6
	3000K	975	13.7	71.1
6in HLBS	3500K	1002	13.7	73.2
	4000K	1012	13.7	73.9
	5000K	1009	13.7	73.6

HLB6S	HLB6S099FS1EMW-3000K		
Luminair	e lumens	975	
Input	watts	13.7	
LER (	LPW)	71.2	
Cassina	0-180	1.22	
Spacing Criteria	90-270	1.30	
Ontena	Diagonal	1.38	
Beam angl	Beam angle (degrees) 110.3		
Field angle	e (degrees)	161.8	
Zonal lumen	Lumens	% Lumens	
0-30	273	28	
0-40	449	46.1	
0-60	782	80.2	
0-90	975	100	
70 00			

Color Metric Summary-3000K		
TM-30-15	Rf = 92.7	
1101-30-15	Rg = 98	
CRI/CIE	Ra = 94.9	
CNI/CIE	R9 = 74.9	





\*Additional photometric ies files available online.

# HLB8169FS1EMW

HLB8 SeleCCTable

HLB8169FS1EMW-3000K			
Luminair	1761		
Input watts		20.9	
LER (LPW)		84.3	
C	0-180	1.26	
Spacing Criteria	90-270	1.26	
Cilleila	Diagonal	1.38	
Beam angl	Beam angle (degrees)		
Field angle	(degrees)	163	
Zonal lumen	Lumens	% Lumens	
0-30	474	26.8	
0-40	778	43.9	
0-60	1380	78	
0-90	1768	99.9	
100 TO			

Color Metric Summary-3000K		
TM-30-15	Rf = 94	
1101-30-13	Rg = 99	
CDI/CIE	Ra = 96	
CRI/CIE	R9 = 69.9	

CCT - Range of 2700K- 5000K





# **HLB8LS9FSE010MWR**

HLB8 SeleCCTable / Lumen Select

	ССТ	Lumens	Power (W)	LPW
	2700K	1325	16.9	78.4
	3000K	1382	16.9	81.8
8in HLB	3500K	1443	16.9	85.4
	4000K	1502	17	88.4
	5000K	1599	17	94.1

HLB8LS9FSE010MWR-3000K		
Luminair	e lumens	2352
Input	Input watts	
LER (	LPW)	75.8
Cunning	0-180	1.26
Spacing Criteria	90-270	1.26
Ontena	Diagonal	1.38
Beam angl	e (degrees)	113
Field angle (degrees)		165
Fleid angle	e (degrees)	103
Zonal lumen	Lumens	% Lumens
Zonal lumen	Lumens	% Lumens
Zonal lumen 0-30	Lumens 623	% Lumens 26.5
Zonal lumen 0-30 0-40	623 1020	% Lumens 26.5 43.4

Color Metric Summary-3000K		
TM-30-15	Rf = 93	
1101-30-13	Rg = 100	
CDI/CIF	Ra = 95	
CRI/CIE	R9 = 72.9	

CCT - Range of 2700K- 5000K



\*Additional photometric ies files available online.

# HLA305FL9301EMWR

HLA3 3000K

	ССТ	Lumens	Power (W)	LPW
3in	2700K	606.8	8.6	70.6
HLA	3000K	631.7	8.6	73.5

Luminair	e lumens	631	
Input watts		8.6	
LER (LPW)		73.37	
Cuasina	0-180	0.66	
Spacing Criteria	90-270	0.66	
Ontena	Diagonal	0.66	
Beam angle (degrees)		40	
Field angle	Field angle (degrees)		
Zonal lumen	Lumens	% Lumens	
0-30	463.2	73.4	
0-40	547.7	86.8	
0-40		96.5	
0-60	608.9		
	608.9 631.0	100	

Color Metric Summary-3000K		
TM-30-15	Rf = 91	
11VI-3U-15	Rg = 101	
CRI/CIE	Ra = 91.7	
CNI/CIE	R9 = 62	





## **HLA406FL9FS1EMWR**

HLA4 SeleCCTable

	CCT	Lumens	Power (W)	LPW
	2700K	689	10.2	67.5
	3000K	711	10.2	69.72
4in HLA	3500K	730	10.2	71.58
	4000K	745	10.2	73.04
	5000K	759	10.2	74.39

HLA406	HLA406FL9FS1EMWR-3000K		
Luminair	e lumens	711	
Input watts		10.2	
LER (	LPW)	69.71	
C	0-180	0.66	
Spacing Criteria	90-270	0.66	
Cilleila	Diagonal	0.64	
Beam angle (degrees)		39.4	
Field angle	(degrees)	69.3	
Zonal lumen	Lumens	% Lumens	
0-30	546.8	76.9	
0-40	625.7	88	
0-60	685.4	96.4	
0-90	711	100	

Color Metric Summary-3000K			
TM-30-15	Rf = 90		
	Rg = 100		
CRI/CIE	Ra = 92		
	R9 = 59		





\*Additional photometric ies files available online.

## **HLA406VWFL9FS1EMWR**

HLA4 SeleCCTable

	ССТ	Lumens	Power (W)	LPW
	2700K	704	10.1	69.7
	3000K	670	10.1	66.4
4in HLA	3500K	673	10.1	66.6
	4000K	671	10.1	66.4
	5000K	656	10.1	65.0

HLA406VWFL9FS1EMWR-3000K					
Luminair	670				
Input	10.1				
LER (LPW)		66.34			
	0-180	1.18			
Spacing Criteria	90-270	1.18			
Citteria	Diagonal	1.28			
Beam angle (degrees)		96.6			
Field angle (degrees)		156.7			
Zonal lumen	Lumens	% Lumens			
0-30	238.1	35.53			
0-40	361.4	53.94			
0-60	569.8	85.04			
0-90	670.0	100			
100 No.					

Color Metric Summary-3000K		
TM-30-15	Rf = 90	
	Rg = 100	
CRI/CIE	Ra = 94.7	
	R9 = 69	

CCT - Range of 2700K- 5000K



\*Additional photometric ies files available online.

# **Lighting Control Solution**

# **HALOHOME**



### HALO Home In-wall Smart Dimmer

HIWMA1BLE40AWH

Controls standard lighting fixtures with dimmer or HALO Home mobile app. Features include:

- ON/OFF
- Dim
- Group
- Scene
- Schedule





### **Cooper Lighting Solutions**

1121 Highway 74 South Peachtree City, GA 30269 P: 770-486-4800 www.cooperlighting.com

Canada Sales 5925 McLaughlin Road Mississauga, Ontario L5R 1B8 P: 905-501-3000

F: 905-501-3172

## **Lighting Product Lines**

Ametrix AtLite

Corelite

Ephesus Fail-Safe

HALO

HALO Commercial

Invue

io

IRiS Lumark

Lumière

McGraw-Edison

Metalux

**MWS** 

Neo-Ray

Portfolio

RSA

Shaper Streetworks

Sure-Lites

### **Controls Product Lines**

Greengate

### **Connected Lighting Systems**

Fifth Light (Canada Only)
HALO Home
Wavel inx

### IoT Platform

Trellix





© 2021 Cooper Lighting Solutions All Rights Reserved Printed in USA Publication No. BR51803721 September 2021

Products, specifications and compliances are subject to change without notice.

Cooper Lighting Solutions is a registered trademark.

All other trademarks are property of their respective owners.

