



Standard

STANDARD MAG BALLAST (2) F20T12 PH 120V

Available for many fluorescent lamp types sold today, including Preheat, Rapid Start, 2-pin CFL, Slimline, High Output, Very High Output and Circline. Magnetic ballasts can be used in any application where these lamps are used.

Product data

General Information	
Lamp Type	F20T12
Number of Lamps	2 piece/unit
Lamp Footage	-
Ballast Type	Magnetic Fluorescent
Base Model	RL2SP20TP
Suitable For Outdoor Use	Yes
Automatic Restart	Yes

Operating and Electrical	
Input Voltage	120 V
Input Frequency	60 Hz
Max THD	10 %
Power (Rated) (Nom)	20 W
Starting Method	Preheat
Lamp Current Crest Factor (Nom)	1.5
Ignition Time (Nom)	1 s
Ballast Factor (Nom)	0.61
Power Factor (Nom)	0.61
Input Current (Operating) (Nom)	0.49 A
Input Power (Nom)	36 W
Rated Lamp Watts	20W W

Wiring	
Wire Striplength	0.50/0.375 mm
Lamp Connection	Series
Wire Length By Color	See data sheet
Wire Gauge (Nom)	18AWG mm
Wire Type	Solid
Remote Wiring Configuration Allowed	Yes
Tandem Wiring Configuration Allowed	Yes
Through Wiring Configuration Allowed	Yes
Max Ballast-Lamp Distance Remote Wiring	30'
Max Ballast-Lamp Distance Tandem Wiring	Any = 30'
Max Ballast-Lamp Distance Through Wiring	Any = 30'

Mechanical and Housing	
Housing Material	Metal
Housing	T1
Housing Dimensions	6.5" x 2.38" x 1.5"


Approval and Application	
EMC Immunity Standard	FCC Non-Consumer
Sound Rating	A
UL Recognized	No

Standard

Product Data	
Order product name	STANDARD RL2SP20TPI
EAN/UPC - Product	781087106327
Order code	RL2SP20TPI
Local order code	131763
Numerator - Quantity Per Pack	1

Numerator - Packs per outer box	10
Material Nr. (12NC)	913700501071
Net Weight (Piece)	1.139 kg

Dimensional drawing

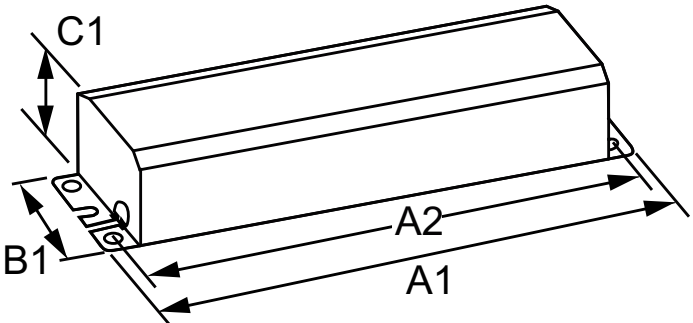

MAG BALLAST (2) F20T12 PH 120V

Product	A1	A2	B1	C1
STANDARD RL2SP20TPI	6.5 in	6 in	2.38 in	1.5 in





Standard

STANDARD MAG BALLAST (2) F20T12 PH 120V

Available for many fluorescent lamp types sold today, including Preheat, Rapid Start, 2-pin CFL, Slimline, High Output, Very High Output and Circline. Magnetic ballasts can be used in any application where these lamps are used.

Product data

General Information	
Lamp Type	F20T12
Number of Lamps	2 piece/unit
Lamp Footage	-
Ballast Type	Magnetic Fluorescent
Base Model	RL2SP20TP
Suitable For Outdoor Use	Yes
Automatic Restart	Yes

Operating and Electrical	
Input Voltage	120 V
Input Frequency	60 Hz
Max THD	10 %
Power (Rated) (Nom)	20 W
Starting Method	Preheat
Lamp Current Crest Factor (Nom)	1.5
Ignition Time (Nom)	1 s
Ballast Factor (Nom)	0.61
Power Factor (Nom)	0.61
Input Current (Operating) (Nom)	0.49 A
Input Power (Nom)	36 W
Rated Lamp Watts	20W W

Wiring	
Wire Striplength	0.50/0.375 mm
Lamp Connection	Series
Wire Length By Color	See data sheet
Wire Gauge (Nom)	18AWG mm
Wire Type	Solid
Remote Wiring Configuration Allowed	Yes
Tandem Wiring Configuration Allowed	Yes
Through Wiring Configuration Allowed	Yes
Max Ballast-Lamp Distance Remote Wiring	30'
Max Ballast-Lamp Distance Tandem Wiring	Any = 30'
Max Ballast-Lamp Distance Through Wiring	Any = 30'

Mechanical and Housing	
Housing Material	Metal
Housing	T1
Housing Dimensions	6.5" x 2.38" x 1.5"


Approval and Application	
EMC Immunity Standard	FCC Non-Consumer
Sound Rating	A
UL Recognized	No

Standard

Product Data	
Order product name	STANDARD RL2SP20TPI
EAN/UPC - Product	781087106327
Order code	RL2SP20TPI
Local order code	131763
Numerator - Quantity Per Pack	1

Numerator - Packs per outer box	10
Material Nr. (12NC)	913700501071
Net Weight (Piece)	1.139 kg

Dimensional drawing

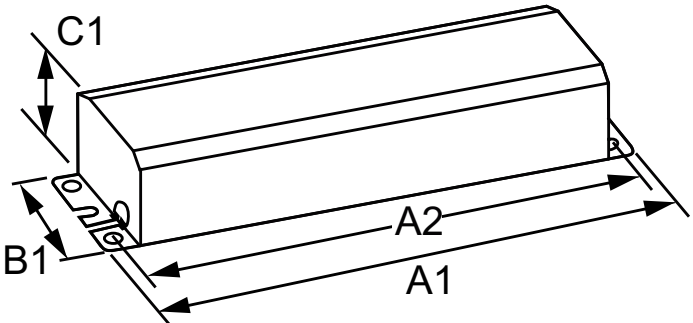

MAG BALLAST (2) F20T12 PH 120V

Product	A1	A2	B1	C1
STANDARD RL2SP20TPI	6.5 in	6 in	2.38 in	1.5 in

