# SOLAHD

## **SDN-P DIN Rail Series**

The SDN DIN Rail power supplies provide industry leading performance. Sag Immunity, transient suppression and noise tolerant, the SDN series ensures compatibility in demanding applications. Power factor correction to meet European directives, hazardous location approvals and optional redundant accessories allow the SDN series to be used in a wide variety of applications. Wide operation temperature range, high tolerance to shock and vibration and reliable design make the SDN series the preferred choice of users.

## Applications

- Industrial/Machine Control
- Process Control
- Conveying Equipment
- Material Handling
- Vending Machines
- Packaging Equipment
- DeviceNet<sup>™</sup>
- Amusement Park Equipment
- Semiconductor Fabrication Equipment

## Features

- Power Factor Correction (per EN61000-3-2)
- Auto Select 115/230 Vac, 50/60 Hz Input
- Improved metal mounting clip
- DC OK Signal
- Adjustable Voltage
- Parallel Capability standard on all units
- Industrial grade design
  - -10°C to 60°C operation without derating. Indefinite short circuit, overvoltage and overtemperature protection.
- Powers high inrush loads without shutdown or foldback
- Rugged metal case and DIN connector
- Narrow width on rail for space critical applications
- User-friendly front panel
- Large, rugged, accessible, multiple connection screw terminations
- Easy installation
- 12 Vdc and 48 Vdc single phase models available
- Highly efficient >90% switching technology
- High MTBF and reliability

#### Accessories

Chassis Mount Bracket (SDN-PMBRK2)

\* Refer to user manual for installation requirements when used in hazardous locations.



## Certifications and Compliances \*

## All Models

- c Listed, Ind. Control Equipment, E61379 - UL 508, CSA C22.2 No. 107.1
  - UL 508, CSA C22.2 No. 107.1
- c **Rus** UL Recognized Component, ITE, E137632 - UL 60950-1/CSA C22.2 No. 60950-1, 2nd Edition
- c**AU**us UL Recognized Component, Haz. Loc., E234790
- ISA 12.12.01, CSA C22.2 No. 213
- Class I, Division 2, Groups A, B, C, D
- CC Low Voltage Directive
  IEC/EN60950-1, 2nd Edition
- Sag Immunity: SEMI F47
- RoHS Compliant

## Models SDN 2.5-24-100P, SDN 4-24-100LP

• Class 2 per UL 1310, CSA C22.2 No. 223

## **Related Products**

- SDP<sup>™</sup> Series
- SCP Series
- SCL Series
- SDU UPS

### SDN-P Specifications (Single Phase), 24 Vdc Output

Description	Catalog Number				
	SDN 2.5-24-100P	SDN 4-24-100LP	SDN 5-24-100P	SDN 10-24-100P	
		Input			
Nominal Voltage	115/230 Vac, Auto select				
–AC Range	85-264 Vac 85-132/176-264 Vac				
-DC Range <sup>1</sup>	90 - 375 Vdc 210 - 375 Vdc				
-Frequency	47 - 63 Hz				
Nominal Current <sup>2</sup>	1.3 / 0.7 A	2.1 / 1.0 A	2.2 / 1.0 A	5 / 2 A typ.	
-Inrush current max.	typ. < 25 A	typ. <	20 A	typ. < 40 A	
Efficiency (Losses 3)	> 87.5% typ. (8.6 W)	> 88% typ. (13.1 W)	> 88% typ. (16.4 W)	> 88% typ. (32.7 W)	
Power Factor Correction		Units Fulfill EN	61000-3-2	'	
		Output			
Nominal Valtage	24 Vdc	24 Vdc	24 \	/dc	
Nominal Voltage	(22.5 - 28.5 Vdc adj.)	(22.5 - 28.5 Vdc adj.)	(22.5 - 28.5	5 Vdc adj.)	
-Tolerance	< ±2% overall (combination Line, load, time and temperature related changes)				
-Ripple <sup>4</sup>		< 50 mVpp			
Overvoltage Protection	< 33 Vdc	< 27 Vdc	< 33	Vdc	
Nominal Current	2.5 A (60 W)	3.8 A (92 W)	5 A (120 W)	10 A (240 W)	
–Current Limit	Fold Forward (Current rises, voltage drops to maintain constant power during overload up to max peak current)				
Holdup Time ⁵	> 20 ms @ full load				
Parallel Operation	Single or Parallel use is selectable via Front Panel Switch (SDN 2.5, 4 should not be used in parallel as Class 2 rating would be violated.)				
	1	General			
EMC: –Emissions	EN61000-6-3, -4; Class B EN55011, EN55022 Radiated and Conducted including Annex A. EN61000-3-2				
–Immunity	EN61000-6-1, -2; EN61000-4-2 Level 4, EN61000-4-3 Level 3; EN61000-4-6 Level 3; EN61000-4-4 Level 4 input and Level 3 output; EN61000-4-5 Isolation Class 4, EN61000-4-11;				
Temperature	Storage: -25°C+85°C Operation10°-60°C full power with operation to 70°C possible with a linear derating to half power from 60°C to 70°C (Convection cooling, no forced air required). Operation up to 50% load permissible with sideways or front side up mounting orientation.				
Humidity		The relative humidity is < 90% RH, no	ncondensing; IEC 68-2-2, 68-2-3.		
MTBF:	> 820,000 hours	> 640,00	00 hours	> 600,000 hours	
– Standard		Bellcore Issue 6 Method 1 Case 3 @ 40°C			
Warranty	5 year limited warranty				
General Protection/Safety	Protected against continuous short-circuit, overload, open-circuit. Protection Class 1 (IEC536), degree of protection IP20 (IEC 529) Safe low voltage: SELV (acc. EN60950)				
Status Indicators	Green LED and DC OK signal (N.O. Solid State Contact rated 200 mA / 60 Vdc)				
		en LED and DC OK signal (N.O. Solid	State Contact rated 200 mA / 60 Vdc	:)	
		0 (	State Contact rated 200 mA / 60 Vdc	)	
Fusing —Input		en LED and DC OK signal (N.O. Solid Installation I. External 10 A slow acting fusing for		,	
Fusing —Input —Output	Internally fused	Installation	the input is recommended to protect i or inductive load startup or switching.	, nput wiring. Fusing may be required for wire/	
–Input –Output	Internally fused Outputs are capable of providing hi loads if 2x Nominal O/F	Installation I. External 10 A slow acting fusing for gh currents for short periods of time for	the input is recommended to protect i or inductive load startup or switching. ontinuous current overload allows for	, nput wiring. Fusing may be required for wire/ reliable fuse tripping.	
–Input –Output	Internally fused Outputs are capable of providing hi loads if 2x Nominal O/F Simple snap-on system for DIt Input: IP20-rated screw term	Installation I. External 10 A slow acting fusing for gh currents for short periods of time for current rating cannot be tolerated. C	the input is recommended to protect i or inductive load startup or switching. ontinuous current overload allows for i-mounted (optional screw mounting s G (1.5-6 mm <sup>2</sup> ) for solid conductors. 1	nput wiring. Fusing may be required for wire/ reliable fuse tripping. et SDN-PMBRK2 required). 6-12 AWG (0.5-4 mm²) for	
–Input –Output Mounting	Internally fused Outputs are capable of providing h loads if 2x Nominal O/F Simple snap-on system for DIt Input: IP20-rated screw term flexible conductors. Outpu	Installation I. External 10 A slow acting fusing for gh currents for short periods of time for <sup>o</sup> current rating cannot be tolerated. C N Rail TS35/7.5 or TS35/15 or chassis nals, connector size range: 16-10 AW	the input is recommended to protect i or inductive load startup or switching. ontinuous current overload allows for -mounted (optional screw mounting s G (1.5-6 mm <sup>2</sup> ) for solid conductors. 1 or size range: 16-10 AWG (1.5 - 6 mr	nput wiring. Fusing may be required for wire/ reliable fuse tripping. et SDN-PMBRK2 required). 6-12 AWG (0.5-4 mm <sup>2</sup> ) for	
-Input -Output Mounting Connections	Internally fused Outputs are capable of providing h loads if 2x Nominal O/F Simple snap-on system for DIt Input: IP20-rated screw term flexible conductors. Outpu	Installation I. External 10 A slow acting fusing for gh currents for short periods of time for current rating cannot be tolerated. C N Rail TS35/7.5 or TS35/15 or chassis nals, connector size range: 16-10 AW t: Two connectors per output, connect Ily enclosed metal housing with fine very e and below,	the input is recommended to protect i or inductive load startup or switching. ontinuous current overload allows for i-mounted (optional screw mounting s G (1.5-6 mm <sup>2</sup> ) for solid conductors. 1 for size range: 16-10 AWG (1.5 - 6 mr entilation grid to keep out small parts. 25 mm above and below, 25 mm left and right,	, nput wiring. Fusing may be required for wire/ reliable fuse tripping. et SDN-PMBRK2 required). 6-12 AWG (0.5-4 mm²) for n²) for solid conductors. 70 mm above and below, 25 mm left and right,	
-Input -Output Mounting Connections Case	Internally fused Outputs are capable of providing hi loads if 2x Nominal O/F Simple snap-on system for DII Input: IP20-rated screw term flexible conductors. Outpu Fu	Installation I. External 10 A slow acting fusing for gh currents for short periods of time for current rating cannot be tolerated. C N Rail TS35/7.5 or TS35/15 or chassis nals, connector size range: 16-10 AW t: Two connectors per output, connect Ily enclosed metal housing with fine very e and below,	the input is recommended to protect i or inductive load startup or switching, ontinuous current overload allows for i-mounted (optional screw mounting s G (1.5-6 mm <sup>2</sup> ) for solid conductors. 1 for size range: 16-10 AWG (1.5 - 6 mr entilation grid to keep out small parts. 25 mm above and below, 25 mm left and right, 15 mm in front 56 x 4.55	nput wiring. Fusing may be required for wire/ reliable fuse tripping. et SDN-PMBRK2 required). 6-12 AWG (0.5-4 mm²) for m²) for solid conductors. 70 mm above and below, 25 mm	

1. Not UL listed for DC input.


Ripple/noise is stated as typical values when measured with a 20 MHz, bandwidth scope and 50 Ohm resistor.
 Full load, 100 Vac Input @ T<sub>amb</sub> = +25°C

2. Input current ratings are conservatively specified with low input, worst case efficiency and power factor.

3. Losses are heat dissipation in watts at full load, nominal input line.

Contact Technical Services at (800) 377-4384 with any questions. Visit our website at www.solahd.com.

#### **SDN-P** Series Dimensions

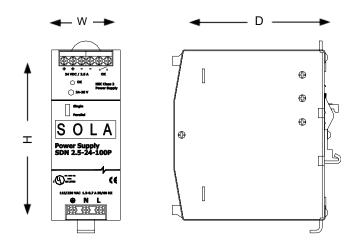

Catalog	Dimensions – inches (mm)				
Number	H	W	D		
12 Vdc					
SDN 9-12-100P	4.88 (124.0)	2.56 (65.0)	4.55 (116.0)		
SDN 16-12-100P	4.88 (124.0)	3.23 (83.0)	4.55 (116.0)		
24 Vdc					
SDN 2.5-24-100P	4.88 (124.0)	1.97 (50.0)	4.55 (116.0)		
SDN 4-24-100LP	4.88 (124.0)	2.56 (65.0)	4.55 (116.0)		
SDN 5-24-100P	4.88 (124.0)	2.56 (65.0)	4.55 (116.0)		
SDN 10-24-100P	4.88 (124.0)	3.26 (83.0)	4.55 (116.0)		
48 Vdc					
SDN 5-48-100P	4.88 (124.0)	3.23 (83.0)	4.55 (116.0)		