



Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

6" ECONOMY UNIVERSAL IC REMODEL HOUSING

INCANDESCENT LAMPS

IC22R

PRODUCT DESCRIPTION

IC Air-Loc® Remodel Housing • Energy efficient, sealed housing
 • IC Remodel Housing for remodel application where back side of ceiling is not accessible • Installs through an opening in the ceiling from below • Secured in place by factory installed remodel springs
 • Can be completely covered with insulation • When used with Air-Loc Gasket, stops infiltration and exfiltration of air, reducing heating and cooling costs • Trims shown with Air-Loc symbol do not require gasket.

PRODUCT SPECIFICATIONS

Lamp Lamp ratings based on trim selected—see page 2.

Socket Medium base porcelain with nickel-plated copper screw shell
 • Drop socket with spring to accommodate certain trim installation.

Trims Trim selection shown on page 2.

Labels UL listed for through-branch wiring, damp locations and IP
 • Product thermally protected against improper use of lamps
 • Union made • UL Listed/CSA certified • Trims 239, 241 and 242 are wet location approved for covered ceiling applications • Trims 28, 29 are wet location approved for covered ceiling applications, **when used with outdoor rated lamps**.

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.

Specifications subject to change without notice.

INSTALLATION

Junction Box Pre-wired junction box, UL listed/CSA certified for through-branch wiring maximum 4 No. 12 AWG 90° C branch circuit conductors (2 in, 2 out) • Junction box provided with removable access plate, (5) $\frac{1}{2}$ " knockouts, (4) Non-metallic sheathed cable connectors and ground wire • Knockouts equipped with prouty slots.



Housing IC housing, .032" aluminum sealed for Air-Loc Compliance • Double stack adjustable feature enables remodel spring to accommodate up to 1 $\frac{1}{4}$ " ceiling thickness.

PRODUCT CODES

Catalog Number	Input Voltage	Lamp Rating
IC22R 6" Incandescent Remodel IC Housing	120V	A19/BR30/BR40/PAR16/PAR20/PAR30/PAR30L/PAR38/R20 (See page 2 for max. trim rating)

Housing and trim can be ordered together or separate, but will always ship separately.

DIMENSIONS

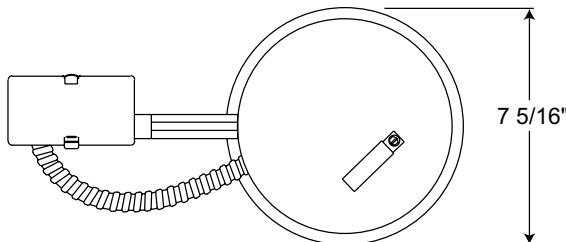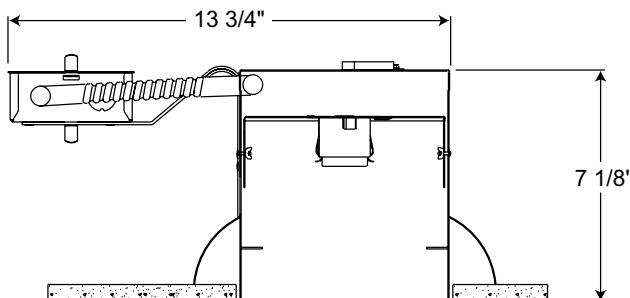

6 3/4" CEILING CUTOUT

Accessories

Catalog Number	Description
ALG6R	Air-Loc Gasket

To order, specify catalog number.

6" ECONOMY UNIVERSAL IC REMODEL HOUSING

INCANDESCENT LAMPS

IC22R

TRIMS/LAMPS

Catalog Number	Description	Max. Lamp Rating	Catalog Number	Description	Max. Lamp Rating
** 24 BWH	Black Baffle, White Trim Ring	50W PAR30,	AIR-LOC 239 WH	Frosted Lens, White	40W A19
24 BSC	Black Baffle, Satin Chrome Trim Ring	75W PAR30L,	AIR-LOC 241 WH	Drop Opal w/Reflector, White	40W A19
24 BABZ	Black Baffle, Classic Aged Bronze Trim Ring	65W BR30	AIR-LOC 241 PW	Drop Opal w/Reflector, Plastic White	
24 BBL	Black Baffle, Black Trim Ring		AIR-LOC 242 WH	Frosted Lens w/Clear Center, White	45W PAR38
24 WWH	White Baffle, White Trim Ring		AIR-LOC 242 SC	Satin Chrome	
** 25 BWH	Black Baffle, White Trim Ring	50W PAR30,	AIR-LOC 242 ABZ	Classic Aged Bronze	
25 BSC	Black Baffle, Satin Chrome Trim Ring	65W BR30	9324 SC	Luminous Frosted Disc, Satin Chrome	50W PAR30, 65W BR30
25 BABZ	Black Baffle, Classic Aged Bronze Trim Ring		9702	Luminous Collar (Frosted)	50W PAR30, 65W BR30, 75W PAR30L
25 BBL	Black Baffle, Black Trim Ring		9024 WWH	Octagonal, White, White Trim Ring	50W PAR30, 65W BR30,
25 WWH	White Baffle, White Trim Ring		9524 SC	Metal Band, Satin Chrome	65W BR30, 50W PAR30, 75W PAR30L
AIR-LOC 28 BWH	Black Baffle, White Trim Ring	60W A19, 65W BR30,			
AIR-LOC 28 WWH	White Baffle, White Trim Ring	75W PAR30/30L, 90W PAR38, 90W BR40			
AIR-LOC 29 CWH	Clear Cone, White Trim Ring	60W A19, 65W BR30,			
AIR-LOC 29 WWH	White Cone, White Trim Ring	75W PAR30/30L, 90W PAR38, 90W BR40			
** 27 CWH	Clear Alzak® Cone, White Trim Ring	50W PAR30,			
27 GWH	Gold Cone, White Trim Ring	75W PAR30L,			
27 BWH	Black Cone, White Trim Ring	65W BR30			
27 PTSC	Pewter Cone, Satin Chrome Trim Ring				
27 WWH	White Cone, White Trim Ring				
27 HZWH	Haze Cone, White Trim Ring				
27 WHZWH	Wheat Haze Cone, White Trim Ring				
27 WHZABZ	Wheat Haze Cone, Classic Aged Bronze Trim Ring				
AIR-LOC 2445 BWH	Black Baffle, White Trim Ring	75W PAR30L,			
AIR-LOC 2445 WWH	White Baffle, White Trim Ring	60W PAR30, 65W BR30			
AIR-LOC 2475 CWH	Clear Alzak® Cone, White Trim Ring	75W PAR30L,			
** 2475 GWH	Gold Alzak® Cone, White Trim Ring	65W BR30,			
2475 BWH	Black Alzak® Cone, White Trim Ring	75W PAR30			
2475 HZWH	Haze Cone, White Trim Ring				
2475 WHZWH	Wheat Haze Cone, White Trim Ring				
250 WH	Open Frame, White	65W BR30			
250 SC	Open Frame, Satin Chrome				
250 ABZ	Open Frame, Classic Aged Bronze				
252 WH	Regressed Open Frame, White	75W R/BR30			
231 CWH	Clear Alzak®, White Trim Ring	60W A19			
231 GWH	Gold Alzak®, White Trim Ring				
231 WWH	White, White Trim Ring				
226 BWH	Cylinder Spotlight, Black Baffle, White Trim Ring	60W PAR16			
226 WWH	Cylinder Spotlight, White Baffle, White Trim Ring				
228 WH	Regressed Eyeball, White	50W PAR20/R20			
229 WH	Regressed Eyeball, White	75W PAR30L,			
229 SC	Regressed Eyeball, Satin Chrome	65W BR30			
229 ABZ	Regressed Eyeball, Classic Aged Bronze				
229 BL	Regressed Eyeball, Black				
248 WWH	Regressed Eyeball, White Baffle, White Trim Ring	50W PAR20/R20			
249 BWH	Regressed Eyeball, Black Baffle, White Trim Ring	75W PAR30L,			
249 WWH	Regressed Eyeball, White Baffle, White Trim Ring	65W BR30			
** 264 BWH	Adjustable, Black Baffle, White Trim Ring	50W PAR30			
264 WWH	Adjustable, White Baffle, White Trim Ring				
** 267 CWH	Clear Alzak® Cone, White Trim Ring	50W PAR30			
267 GWH	Gold Alzak® Cone, White Trim Ring				
267 BWH	Black Alzak® Cone, White Trim Ring				
267 HZWH	Haze Cone, White Trim Ring				
267 WHZWH	Wheat Haze Cone, White Trim Ring				

Trim Size: 7 5/8" O.D. (except Cat. Nos. 228, 229, 241, 9024,

-8" O.D., Cat. No. 9702 -7 3/4" O.D.).

Alzak is a registered trademark of Alcoa Corp.

Note: In Canada when insulation is present, Type IC fixtures must be used.

AIR-LOC JUNO IC housings meet IECC Energy Code requirements per ASTM E283.

Air-Loc® rated trims are pre-gasketed for minimum air leakage with IC housings.

◆ UL Listed for use in wet location.

◆◆ UL Listed for use in wet location with outdoor rated lamp.

** NOTE: TR6 Trim Ring compatible with 24, 25, 27, 244S, 247S, 264, 267 trims.

Housing and trim can be ordered together or separate, but will always ship separately.



Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

6" ECONOMY UNIVERSAL IC REMODEL HOUSING

INCANDESCENT LAMPS

IC22R

PRODUCT DESCRIPTION

IC Air-Loc® Remodel Housing • Energy efficient, sealed housing
 • IC Remodel Housing for remodel application where back side of ceiling is not accessible • Installs through an opening in the ceiling from below • Secured in place by factory installed remodel springs
 • Can be completely covered with insulation • When used with Air-Loc Gasket, stops infiltration and exfiltration of air, reducing heating and cooling costs • Trims shown with Air-Loc symbol do not require gasket.

PRODUCT SPECIFICATIONS

Lamp Lamp ratings based on trim selected—see page 2.

Socket Medium base porcelain with nickel-plated copper screw shell
 • Drop socket with spring to accommodate certain trim installation.

Trims Trim selection shown on page 2.

Labels UL listed for through-branch wiring, damp locations and IP
 • Product thermally protected against improper use of lamps
 • Union made • UL Listed/CSA certified • Trims 239, 241 and 242 are wet location approved for covered ceiling applications • Trims 28, 29 are wet location approved for covered ceiling applications, **when used with outdoor rated lamps**.

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.

Specifications subject to change without notice.

INSTALLATION

Junction Box Pre-wired junction box, UL listed/CSA certified for through-branch wiring maximum 4 No. 12 AWG 90° C branch circuit conductors (2 in, 2 out) • Junction box provided with removable access plate, (5) $\frac{1}{2}$ " knockouts, (4) Non-metallic sheathed cable connectors and ground wire • Knockouts equipped with prouty slots.



Housing IC housing, .032" aluminum sealed for Air-Loc Compliance • Double stack adjustable feature enables remodel spring to accommodate up to 1 $\frac{1}{4}$ " ceiling thickness.

PRODUCT CODES

Catalog Number	Input Voltage	Lamp Rating
IC22R 6" Incandescent Remodel IC Housing	120V	A19/BR30/BR40/PAR16/PAR20/PAR30/PAR30L/PAR38/R20 (See page 2 for max. trim rating)

Housing and trim can be ordered together or separate, but will always ship separately.

DIMENSIONS

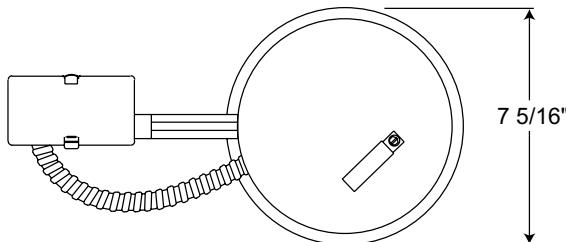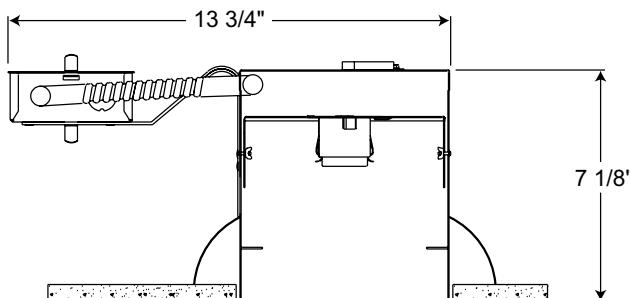

6 3/4" CEILING CUTOUT

Accessories

Catalog Number	Description
ALG6R	Air-Loc Gasket

To order, specify catalog number.

6" ECONOMY UNIVERSAL IC REMODEL HOUSING

INCANDESCENT LAMPS

IC22R

TRIMS/LAMPS

Catalog Number	Description	Max. Lamp Rating	Catalog Number	Description	Max. Lamp Rating
** 	24 BWH Black Baffle, White Trim Ring	50W PAR30,		239 WH ♦ Frosted Lens, White	40W A19
24 BSC	Black Baffle, Satin Chrome Trim Ring	75W PAR30L,		241 WH ♦ Drop Opal w/Reflector, White	40W A19
24 BABZ	Black Baffle, Classic Aged Bronze Trim Ring	65W BR30		241 PW ♦ Drop Opal w/Reflector, Plastic White	
24 BBL	Black Baffle, Black Trim Ring			242 WH ♦ Frosted Lens w/Clear Center, White	45W PAR38
24 WWH	White Baffle, White Trim Ring			242 SC ♦ Satin Chrome	
** 	25 BWH Black Baffle, White Trim Ring	50W PAR30,		242 ABZ ♦ Classic Aged Bronze	
25 BSC	Black Baffle, Satin Chrome Trim Ring	65W BR30		9324 SC Luminous Frosted Disc, Satin Chrome	50W PAR30, 65W BR30
25 BABZ	Black Baffle, Classic Aged Bronze Trim Ring			9702 Luminous Collar (Frosted)	50W PAR30, 65W BR30, 75W PAR30L
25 BBL	Black Baffle, Black Trim Ring			9024 WWH Octagonal, White, White Trim Ring	50W PAR30, 65W BR30,
25 WWH	White Baffle, White Trim Ring			9524 SC Metal Band, Satin Chrome	65W BR30, 50W PAR30, 75W PAR30L
 	28 BWH ♦♦ Black Baffle, White Trim Ring	60W A19, 65W BR30,			
	28 WWH ♦♦ White Baffle, White Trim Ring	75W PAR30/30L,			
		90W PAR38, 90W BR40			
 	29 CWH ♦♦ Clear Cone, White Trim Ring	60W A19, 65W BR30,			
	29 WWH ♦♦ White Cone, White Trim Ring	75W PAR30/30L,			
		90W PAR38, 90W BR40			
** 	27 CWH Clear Alzak® Cone, White Trim Ring	50W PAR30,			
	27 GWH Gold Cone, White Trim Ring	75W PAR30L,			
	27 BWH Black Cone, White Trim Ring	65W BR30			
	27 PTSC Pewter Cone, Satin Chrome Trim Ring				
	27 WWH White Cone, White Trim Ring				
	27 HZWH Haze Cone, White Trim Ring				
	27 WHZWH Wheat Haze Cone, White Trim Ring				
	27 WHZABZ Wheat Haze Cone, Classic Aged Bronze Trim Ring				
 	2445 BWH Black Baffle, White Trim Ring	75W PAR30L,			
	2445 WWH White Baffle, White Trim Ring	60W PAR30,			
		65W BR30			
 	2475 CWH Clear Alzak® Cone, White Trim Ring	75W PAR30L,			
	2475 GWH Gold Alzak® Cone, White Trim Ring	65W BR30,			
	2475 BWH Black Alzak® Cone, White Trim Ring	75W PAR30			
	2475 HZWH Haze Cone, White Trim Ring				
	2475 WHZWH Wheat Haze Cone, White Trim Ring				
	250 WH Open Frame, White	65W BR30			
	250 SC Open Frame, Satin Chrome				
	250 ABZ Open Frame, Classic Aged Bronze				
	252 WH Regressed Open Frame, White	75W R/BR30			
	231 CWH Clear Alzak®, White Trim Ring	60W A19			
	231 GWH Gold Alzak®, White Trim Ring				
	231 WWH White, White Trim Ring				
	226 BWH Cylinder Spotlight, Black Baffle, White Trim Ring	60W PAR16			
	226 WWH Cylinder Spotlight, White Baffle, White Trim Ring				
	228 WH Regressed Eyeball, White	50W PAR20/R20			
	229 WH Regressed Eyeball, White	75W PAR30L,			
	229 SC Regressed Eyeball, Satin Chrome	65W BR30			
	229 ABZ Regressed Eyeball, Classic Aged Bronze				
	229 BL Regressed Eyeball, Black				
	248 WWH Regressed Eyeball, White Baffle, White Trim Ring	50W PAR20/R20			
	249 BWH Regressed Eyeball, Black Baffle, White Trim Ring	75W PAR30L,			
	249 WWH Regressed Eyeball, White Baffle, White Trim Ring	65W BR30			
	264 BWH Adjustable, Black Baffle, White Trim Ring	50W PAR30			
	264 WWH Adjustable, White Baffle, White Trim Ring				
	267 CWH Clear Alzak® Cone, White Trim Ring	50W PAR30			
	267 GWH Gold Alzak® Cone, White Trim Ring				
	267 BWH Black Alzak® Cone, White Trim Ring				
	267 HZWH Haze Cone, White Trim Ring				
	267 WHZWH Wheat Haze Cone, White Trim Ring				

Trim Size: 7 5/8" O.D. (except Cat. Nos. 228, 229, 241, 9024,

-8" O.D., Cat. No. 9702 -7 3/4" O.D.).

Alzak is a registered trademark of Alcoa Corp.

Note: In Canada when insulation is present, Type IC fixtures must be used.

 JUNO IC housings meet IECC Energy Code requirements per ASTM E283.

Air-Loc® rated trims are pre-gasketed for minimum air leakage with IC housings.

♦ UL Listed for use in wet location.

♦♦ UL Listed for use in wet location with outdoor rated lamp.

** NOTE: TR6 Trim Ring compatible with 24, 25, 27, 244S, 247S, 264, 267 trims.

Housing and trim can be ordered together or separate, but will always ship separately.